

# AIM-75

## 8" Industrial-Grade Tablet with Qualcomm® Snapdragon™ 660 Processor, Android 10 with GMS



### Features

- Qualcomm® Snapdragon™ 660 with Android 10 operating system
- Certified for Google Mobile Services for downloading apps and APIs
- 8" LCD with 400-nit brightness, 1920 x 1200 resolution
- Corning® Gorilla® Glass 3 touchscreen supports gloved and stylus operation
- IP65-rated protection from water and dust and 4-ft drop tolerance
- LTE, WLAN, Bluetooth, NFC, and GIS capabilities
- Optional peripherals include 1D/2D barcode scanner, LAN+COM, UHF RFID, and MSR modules
- Multi-bay charging and docking stations ensure easy installation in diverse environments



### Introduction

AIM-75 is an industrial-grade tablet with a swappable battery that supports up to 12 hours of operation to facilitate diverse vertical applications. Equipped with IP65-rated protection from water and dust ingress, AIM-75 is suitable for indoor and outdoor installation. In addition to WLAN/LTE capabilities that enable mobile computing, AIM-75 can be integrated with additional optional peripherals including a 1D/2D barcode scanner, LAN+COM, UHF RFID, and MSR modules. This makes AIM-75 ideal for a wide range of operations in the manufacturing, warehouse, retail, and field service industries.


### Specifications

|                          |                        |                                                                                                            |
|--------------------------|------------------------|------------------------------------------------------------------------------------------------------------|
| System                   | Processor              | Qualcomm® Snapdragon™ 660 octa-core 2.2 GHz                                                                |
|                          | Memory                 | 4 GB LPDDR4x                                                                                               |
|                          | Operating System       | Android 10 with GMS                                                                                        |
| Storage                  | eMMC                   | 64 GB                                                                                                      |
|                          | Micro SD slot          | Supports up to 2 TB                                                                                        |
| Display                  | Type                   | 8" IPS LCD                                                                                                 |
|                          | Resolution             | WUXGA 1920 x 1200                                                                                          |
|                          | Brightness             | 400 cd/m²                                                                                                  |
|                          | Touch Type             | 10-point multi-touch PCAP touch control                                                                    |
|                          | Glass Type             | Corning® Gorilla® Glass 3                                                                                  |
| Communication            | WLAN                   | IEEE 802.11 a/b/g/n/ac/k/v/r                                                                               |
|                          | Bluetooth              | Bluetooth® v5.0                                                                                            |
|                          | WWAN (Optional)        | Global Cat. 4/6 4G LTE (data only)                                                                         |
|                          | NFC                    | 13.56 MHz, compatible with ISO15693, ISO14443A, ISO 14443B, FeliCa                                         |
| Connectivity             | Standard I/O           | 1 x USB Type-C 3.0, 1 x combo audio jack, 1 x SIM card reader, 1 x micro SD card reader                    |
|                          | Extended I/O           | 1 x AIM extension 14-pin pogo connector: 1 x USB 2.0, 1 x 2-wire UART, 5V/1A power                         |
|                          | Docking                | 1 x AIM docking 16-pin pogo connector: 1 x USB 2.0, 9V power                                               |
|                          | Speaker                | 1 x Internal speakers (1.5W)                                                                               |
| GPS                      | GPS                    | Glonass/Beidou/Galileo/QZSS/SBAS                                                                           |
| Audio                    | Audio Jack             | 1 x Audio combo jack (combines stereo audio output and mono microphone input)                              |
| Camera                   | Front                  | 5 megapixel fixed-focus camera                                                                             |
|                          | Rear                   | 8 megapixel auto-focus camera with LED flash                                                               |
| Sensors                  |                        | Ambient light sensor, P-sensor, e-compass, g-sensor, gyroscope                                             |
| Control Buttons          |                        | 1 x Power button, 2 x volume keys (up/down), 1 x programmable function key                                 |
| System Indicators        |                        | Full: green (100%); charging: blue; low charge: red (<10%)                                                 |
| Power System             | Input Voltage          | USB Type-C: 5V/3A, 9V/2A<br>Dock pogo: 9V/2A                                                               |
|                          | Battery                | Swappable battery: 4900 mAh (minimum) 18.6 WHr<br>Operating time: up to 12 hrs*<br>Charging time: < 3 hrs* |
|                          |                        |                                                                                                            |
| Environmental            | Operating Temperature  | -10 ~ 50 °C/14 ~ 122 °F                                                                                    |
|                          | Storage Temperature    | -20 ~ 60 °C/-4 ~ 140 °F                                                                                    |
|                          | IP Rating              | IP65                                                                                                       |
|                          | Shock                  | SAE J1455                                                                                                  |
|                          | Vibration              | SAE J1455                                                                                                  |
|                          | Humidity               | Operating: 10 ~ 90% @ 40 °C/104 °F non-condensing<br>Storage: -10 ~ 95% non-condensing                     |
|                          | Drop Tested            | Up to 120 cm (4 ft) onto plywood                                                                           |
| Physical Characteristics | Dimensions (W x D x H) | 240 x 142 x 14.5 mm/9.44 x 5.59 x 0.57 in                                                                  |
|                          | Weight                 | 600 g/1.32 lb                                                                                              |
|                          | Color                  | Dark gray                                                                                                  |
| Certifications           |                        | FCC, CE, TELEC, NCC, RCM, IC, VCCI, PTCRB, SRRC, CB, UL, CCC, BSMI                                         |

\*The battery operation duration and recharge time may vary according to different factors such as screen brightness, applications, features, power management, battery condition, and other configurable settings.

## Dimensions

Unit: mm

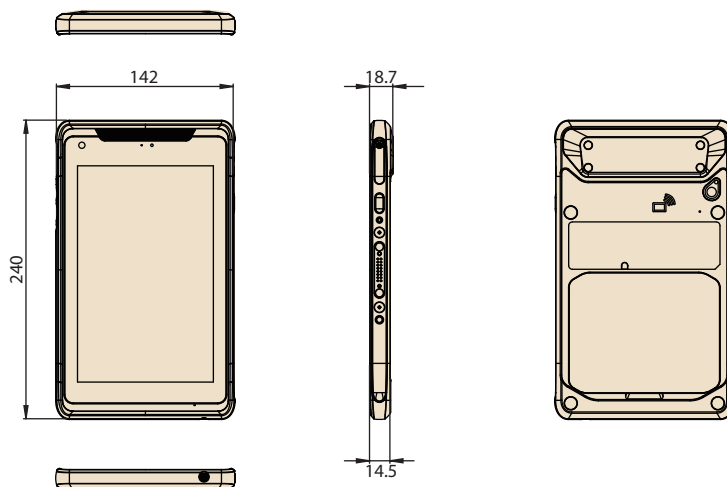

## System I/O



## Ordering Information

| Part Number    | Wi-Fi | LTE | GMS | Applicable Regions / Countries    |
|----------------|-------|-----|-----|-----------------------------------|
| AIM-75S-211S10 | ✓     |     | ✓   | Global (except Europe)            |
| AIM-75S-221S10 | ✓     |     | ✓   | Europe (except Turkey and Russia) |
| AIM-75S-200S10 | ✓     |     |     | Global                            |
| AIM-75S-311S10 | ✓     | ✓   | ✓   | North America                     |
| AIM-75S-611S10 | ✓     | ✓   | ✓   | Global (except Europe)            |
| AIM-75S-621S10 | ✓     | ✓   | ✓   | Europe (except Turkey and Russia) |
| AIM-75S-300S10 | ✓     | ✓   |     | North America                     |
| AIM-75S-600S10 | ✓     | ✓   |     | Global                            |
| AIM-75S-800S10 | ✓     | ✓   |     | China                             |

Note: For mandatory regulations by country, refer to page 1.

## Optional Accessories

| Part Number   | Description                               |
|---------------|-------------------------------------------|
| AIM-ADP0-0525 | ADP 45W 100~240V Type-C PD                |
| 1700001524    | Power cord (USA) UL 3P 10A 125V 183 cm    |
| 1700008921    | Power cord (Japan) PSE 3P 7A 125V 183 cm  |
| 1700019146    | Power cord (China) CCC 3P 10A 250V 183 cm |
| 1700018553    | Power cord (NZ/AU) SAA 3P 10A 250V 183 cm |
| 170203180A    | Power cord (UK) BSI 3P 10A 250V 183 cm    |
| 170203183C    | Power cord (EU) 3P 2.5A 250V 183 cm       |

Note: Power cords are suitable for AIM-75, AIM-VSD, and AIM-MCS.

## Packing List

### Description

1 x AIM-75 tablet  
1 x AC/DC adaptor  
1 x Power cord TW

# Vehicle Docking Station



## Features

- Compatible with 9 ~ 32 V<sub>DC</sub> in-vehicle power supply
- Rapid single-handed docking and undocking
- Anti-theft locking mechanism
- External GPS antenna
- Programmable function keys
- High-density connector
- Compliant with SAE J1455 for vibration and shock tolerance
- Safe and reliable design for vehicle applications



## Specifications

|                |                          | Fully Configured Unit                                                                                       | Charging Dock Only |
|----------------|--------------------------|-------------------------------------------------------------------------------------------------------------|--------------------|
| I/O            | High-Density Connector   | 1 x CAN bus (supports raw CAN, J1939, OBD-II/ISO 15765) with configurable firmware                          |                    |
|                |                          | 5 x Digital inputs                                                                                          |                    |
|                |                          | 1 x Odometer (supports dry and wet contact) with configurable and switchable firmware (default wet contact) |                    |
|                |                          | 2 x Digital outputs (supports speed pulse)                                                                  | N/A                |
|                |                          | 1 x RS-232 (4 wire)                                                                                         |                    |
|                |                          | 1 x RS-232/485 (2 wire) (default RS-485, termination enabled)                                               |                    |
|                |                          | 1 x USB 2.0                                                                                                 |                    |
|                |                          | 1 x Power output 12V 1A                                                                                     |                    |
| GPS            | Extended GPS             | 1 x External GPS antenna                                                                                    | N/A                |
| Function Keys  |                          | 5 x Programmable function keys                                                                              | N/A                |
| Key Lock       |                          | Anti-theft key lock (key can be removed)                                                                    | N/A                |
| Power          | Input Voltage            | Supports 12/24 V vehicle power (9 ~ 32 V <sub>DC</sub> input range)                                         |                    |
| Mechanical     | Dimensions (W x D x H)   | 196 x 76.9 x 212.75 mm/7.71 x 3.02 x 8.37 in                                                                |                    |
|                | Weight                   | 0.5 kg/1.10 lb                                                                                              |                    |
| Environmental  | Operating Temperature    | -10 ~ 50 °C/14 ~ 122 °F (0 ~ 40 °C/32 ~ 104 °F when charging)                                               |                    |
|                | Storage Temperature      | -30 ~ 80 °C/-22 ~ 176 °F                                                                                    |                    |
|                | IP Rating                | IP54                                                                                                        |                    |
|                | Vibration/Shock          | SAE J1455                                                                                                   |                    |
|                | Safety                   | UL, CB, LVD, CCC                                                                                            |                    |
|                | Vehicle Power Regulation | E-Mark, ISO7637-2                                                                                           |                    |
| Certifications |                          | CE, FCC, CCC                                                                                                |                    |

## Ordering Information


| Part Number      | Description                                          |
|------------------|------------------------------------------------------|
| AIM-VEH7-0000    | AIM vehicle docking station (advanced I/O)           |
| AIM-VEH7-0010    | AIM vehicle docking station (power only)             |
| 1700026766-01    | High-density cable                                   |
| PWS-770-GPSAN00E | External GPS antenna                                 |
| 1700027666-01    | Vehicle power cable (In-house engineer testing only) |
| 1700027665-01    | Vehicle power cable (vehicle battery)                |

## Packing List

| Item | AIM-VEH7-0000                             | AIM-VEH7-0010                             |
|------|-------------------------------------------|-------------------------------------------|
| 1    | 1 x Vehicle dock (advanced I/O)           | 1 x Vehicle dock (power only)             |
| 2    | 1 x Vehicle power cable (vehicle battery) | 1 x Vehicle power cable (vehicle battery) |

## Dimensions

Unit: mm

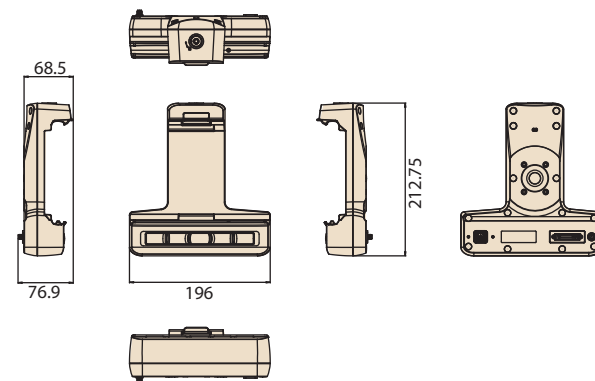

# Office / VESA Docking Station



## Features


- 9 ~ 32 V wide input voltage range
- VESA (75 x 75 mm) compliant docking stations
- -10 ~ 50 °C/14 ~ 122 °F operating temperature
- Reliable docking connector for diverse applications

## Specifications


|               |                        | Office Docking Station<br>(full I/O configuration)                 | Office Docking Station<br>(basic configuration)  | VESA Docking Station<br>(full I/O configuration)                   | VESA Docking Station<br>(USB)                |
|---------------|------------------------|--------------------------------------------------------------------|--------------------------------------------------|--------------------------------------------------------------------|----------------------------------------------|
| I/O           |                        | 2 x USB 3.0<br>1 x RS-232 COM<br>1 x Gigabit LAN<br>1 x Power jack | 2 x USB 2.0<br>1 x Power jack                    | 2 x USB 3.0<br>1 x RS-232 COM<br>1 x Gigabit LAN<br>1 x Power jack | 2 x USB 2.0<br>1 x Power jack                |
| Stand         |                        | SECC steel                                                         | SECC steel                                       | N/A                                                                | N/A                                          |
| Power         | Input Voltage          | 9 ~ 32 V                                                           | 19 V                                             | 9 ~ 32 V                                                           | 19 V                                         |
| Mechanical    | Dimensions (W x D x H) | 215 x 174.29 x 260.69 mm/<br>8.5 x 6.9 x 10.3 in                   | 215 x 174.29 x 260.69 mm/<br>8.5 x 6.9 x 10.3 in | 160 x 61.8 x 189.2 mm/<br>6.3 x 2.4 x 7.4 in                       | 160 x 61.8 x 189.2 mm/<br>6.3 x 2.4 x 7.4 in |
|               | Weight                 | 0.75 kg/1.65 lb                                                    | 0.748 kg/1.64 lb                                 | 0.282 kg/0.62 lb                                                   | 0.28 kg/0.61 lb                              |
| Environmental | Operating Temperature  | -10 ~ 50 °C/14 ~ 122 °F                                            |                                                  |                                                                    |                                              |
|               | Storage Temperature    | -20 ~ 70 °C/-4 ~ 158 °F                                            |                                                  |                                                                    |                                              |
|               | Safety                 | UL, CB, LVD, CCC                                                   |                                                  |                                                                    |                                              |
|               | Certifications         | CE, FCC, CCC                                                       |                                                  |                                                                    |                                              |

## Dimensions

### Office Docking Station

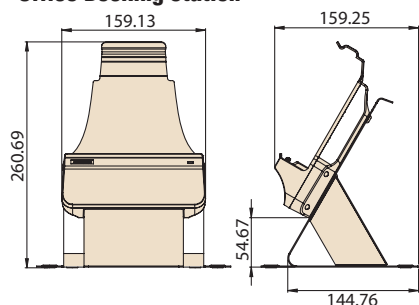

### VESA Advanced/Basic Docking Station

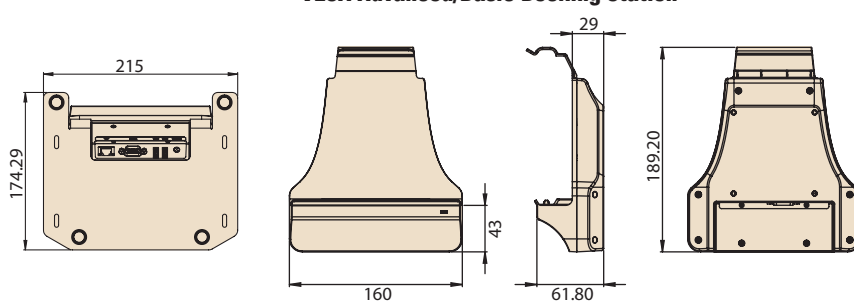

Unit: mm

## Ordering Information

| Part Number   | Description                                                    |
|---------------|----------------------------------------------------------------|
| AIM-OFD0-0170 | AIM 8 advanced office docking station (full I/O configuration) |
| AIM-OFD0-0171 | AIM 8 office docking station (USB)                             |
| AIM-VSD0-0170 | AIM 8 advanced VESA docking station (Full I/O configuration)   |
| AIM-VSD0-0171 | AIM 8 VESA docking station with USB (USB)                      |
| AIM-STD0-0000 | AIM 8 VESA stand                                               |

## Optional Accessories


| Part Number      | Description                                    |
|------------------|------------------------------------------------|
| 96PSA-A65W19V1-3 | ADP A/D 100-240V 65W 19V C6 DC PLUG 180° 62368 |
| 1700001524       | Power cord (USA) UL 3P 10A 125V 183 cm         |
| 1700008921       | Power cord (Japan) PSE 3P 7A 125V 183 cm       |
| 1700019146       | Power cord (China) CCC 3P 10A 250V 183 cm      |
| 1700018553       | Power cord (NZ/AU) SAA 3P 10A 250V 183 cm      |
| 170203180A       | Power cord (UK) BSI 3P 10A 250V 183 cm         |
| 170203183C       | Power cord (EU) 3P 2.5A 250V 183 cm            |

## Packing List

| Item | AIM-OFD0-0170                            | AIM-OFD0-0171         |
|------|------------------------------------------|-----------------------|
| 1    | 1 x Office dock (full I/O configuration) | 1 x Office dock (USB) |
| 2    | 1 x AC/DC adaptor                        | 1 x AC/DC adaptor     |
| Item | AIM-VSD0-0170                            | AIM-VSD0-0171         |
| 1    | 1 x VESA dock (full I/O configuration)   | 1 x VESA dock (USB)   |
| 2    | 1 x AC/DC adaptor                        | 1 x AC/DC adaptor     |

Note: This product does not include a power cable. Please order a power cable using the part number according to your usage requirements.

# AIM Multi-Bay Charging Station

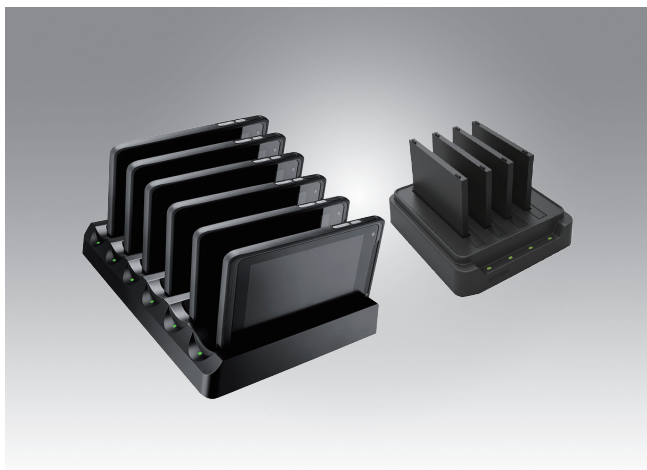

## Features

- Can charge up to 6 tablets/4 batteries simultaneously
- Overcurrent and overvoltage protection provided
- Rapid single-handed docking and undocking
- LED indicators for monitoring charging status




## Specifications

|                |                        | Multi-Tablet Charging Station                | Multi-Battery Charging Station               |
|----------------|------------------------|----------------------------------------------|----------------------------------------------|
| Capacity       | Number of Bays         | 6                                            | 4                                            |
|                | Charging Current       | 2A                                           | 2.5A                                         |
|                | Charging Voltage       | 9 V                                          | 4.35 V                                       |
|                | Input Voltage          | 19 V                                         | 19 V                                         |
| LED Indicators |                        | Green: Full<br>Amber: Charging<br>Red: Error | Green: Full<br>Amber: Charging<br>Red: Error |
|                | Dimensions (W x D x H) | 387 x 269 x 49 mm/15.23 x 10.59 x 1.92 in    | 144 x 155 x 39 mm/5.66 x 6.10 x 1.53 in      |
|                | Weight                 | 1.98 kg/4.36 lb                              | 0.48 kg/1.05 lb                              |
| Mechanical     | Operating Temperature  | 0 ~ 40 °C/32 ~ 104 °F                        | 0 ~ 40 °C/32 ~ 104 °F                        |
|                | Storage Temperature    | -10 ~ 50 °C/14 ~ 122 °F                      | -10 ~ 50 °C/14 ~ 122 °F                      |
|                | Safety                 | UL, CB, LVD, CCC, RCM                        | UL, CB, LVD, CCC, RCM                        |
|                | Certifications         | CE, FCC, CCC, RCM, BSMI                      | CE, FCC, CCC, RCM, BSMI                      |


## Dimensions

Unit: mm

### Multi-Tablet Charging Station

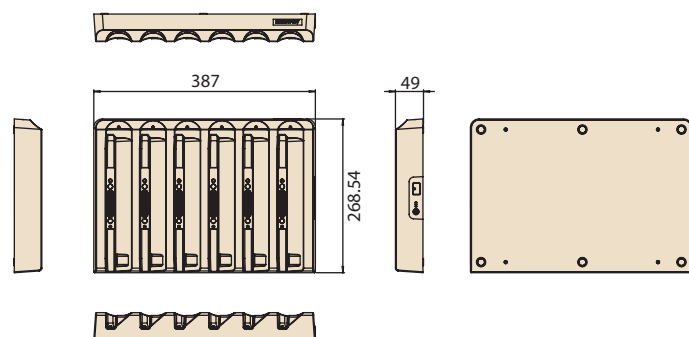

### Multi-Battery Charging Station

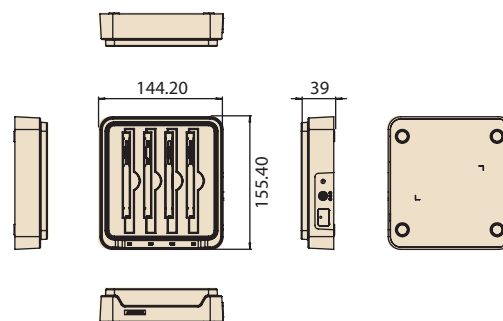

## Ordering Information

| Part Number   | Description                            |
|---------------|----------------------------------------|
| AIM-CHG0-0150 | Multi-tablet charging station for AIM  |
| AIM-MBC0-0051 | Multi-battery charging station for AIM |

## Optional Adapter

| Model         | Adapter Part Number | Description                                    |
|---------------|---------------------|------------------------------------------------|
| AIM-CHG0-0150 | 96PSA-A120W19V1     | ADP A/D 100-240V 120W 19V C6 DC jack           |
| AIM-MBC0-0051 | 96PSA-A65W19V1-3    | ADP A/D 100-240V 65W 19V C6 DC PLUG 180° 62368 |

## Packing List

| Item | AIM-MBC0-0051                      |
|------|------------------------------------|
| 1    | 1 x Multi-battery charging station |
| 2    | 1 x AC/DC adaptor                  |

Note: This product does not include a power cable. Please order a power cable using the part number according to your usage requirements.

## Optional Power Cable

| Part Number | Description                               |
|-------------|-------------------------------------------|
| 1700001524  | Power cord (USA) UL 3P 10A 125V 183 cm    |
| 1700008921  | Power cord (Japan) PSE 3P 7A 125V 183 cm  |
| 1700019146  | Power cord (China) CCC 3P 10A 250V 183 cm |
| 1700018553  | Power cord (NZ/AU) SAA 3P 10A 250V 183 cm |
| 170203180A  | Power cord (UK) BSI 3P 10A 250V 183 cm    |
| 170203183C  | Power cord (EU) 3P 2.5A 250V 183 cm       |

# Peripherals and Accessories

## Extension Modules

**Barcode scanner (20°)**



**Barcode scanner (70°)**



**MSR + barcode scanner module**



**MSR module**



| Part Number       | AIM-EXT0-0040                                                                                                                                                                                                                                | AIM-EXT0-0041                                                                                                                                                                                                                                | AIM-P521A0                                                                                                                                                                                                                                                                                                                                                                                                                                 | AIM-P521B0                                                                                                                                    |
|-------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Features</b>   | <ul style="list-style-type: none"> <li>Sensor: 640 x 480 CMOS sensor</li> <li>Illumination/Aimer: white LED illumination/red LED dot aimer</li> <li>Frame rate: 30 fps</li> <li>Field of view: horizontal: 37.8°; vertical: 28.8°</li> </ul> | <ul style="list-style-type: none"> <li>Sensor: 640 x 480 CMOS sensor</li> <li>Illumination/Aimer: white LED illumination/red LED dot aimer</li> <li>Frame rate: 30 fps</li> <li>Field of view: horizontal: 37.8°; vertical: 28.8°</li> </ul> | <p><b>MSR</b></p> <ul style="list-style-type: none"> <li>Swipe Speed: 3 ~ 75 in/sec</li> <li>Supported Format: ISO 7811/ JIS II bi-directional swipe</li> </ul> <p><b>Barcode Scanner</b></p> <ul style="list-style-type: none"> <li>Sensor: 640 x 480 CMOS sensor</li> <li>Illumination/Aimer: white LED illumination/red LED dot aimer</li> <li>Frame rate: 30 fps</li> <li>Field of view: horizontal: 37.8°; vertical: 28.8°</li> </ul> | <ul style="list-style-type: none"> <li>Swipe Speed: 3 ~ 75 in/sec</li> <li>Supported Format: ISO 7811/ JIS II bi-directional swipe</li> </ul> |
| <b>Dimensions</b> | 130.2 x 38.7 x 27.8 mm/<br>5.12 x 1.52 x 1.09 in                                                                                                                                                                                             | 130.2 x 38.7 x 32 mm/<br>5.12 x 1.52 x 1.25 in                                                                                                                                                                                               | 130.2 x 68.84 x 80 mm/<br>5.12 x 2.71 x 3.15 in                                                                                                                                                                                                                                                                                                                                                                                            | 130.2 x 68.84 x 80 mm/<br>5.12 x 2.71 x 3.15 in                                                                                               |
| <b>Weight</b>     | 0.042 kg/0.092 lb                                                                                                                                                                                                                            | 0.042 kg/0.092 lb                                                                                                                                                                                                                            | 100 g/0.22 lb                                                                                                                                                                                                                                                                                                                                                                                                                              | 82 g/0.18 lb                                                                                                                                  |

**LAN + COM module**



**UHF RFID reader**



**UHF RFID reader**



**UHF RFID reader (flat type)**



| Part Number       | AIM-EXT0-0046                                | AIM-EXT0-0047                                                                                                                                                                                                                             | AIM-EXT0-0049                                                                                                                                                                                                                             | AIM-EXT0-0050                                                                                                                                                                                                          |
|-------------------|----------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Features</b>   | 1 x 10/100 Ethernet port<br>1 x COM port     | <ul style="list-style-type: none"> <li>RFID output: 25W</li> <li>Antenna type: Linear polarization</li> <li>Frequency: EU: 867 ~ 869 MHz; US: 913 ~ 917 MHz</li> <li>Supported tag standard: EPC Class 2, Gen. 2/ ISO 18000-6C</li> </ul> | <ul style="list-style-type: none"> <li>RFID output: 25W</li> <li>Antenna type: Linear polarization</li> <li>Frequency: EU: 867 ~ 869 MHz; US: 913 ~ 917 MHz</li> <li>Supported tag standard: EPC Class 2, Gen. 2/ ISO 18000-6C</li> </ul> | <ul style="list-style-type: none"> <li>RFID output: 25W</li> <li>Antenna type: Linear polarization</li> <li>Frequency: EU: 867 ~ 869 MHz</li> <li>Supported tag standard: EPC Class 2, Gen. 2/ ISO 18000-6C</li> </ul> |
| <b>Dimensions</b> | 130.2 x 70 x 29 mm/<br>5.12 x 2.75 x 1.14 in | 130.2 x 63.8 x 79.40 mm/<br>5.12 x 2.5 x 3.13 in                                                                                                                                                                                          | 130.2 x 63.8 x 79.40 mm/<br>5.12 x 2.5 x 3.13 in                                                                                                                                                                                          | 130.2 x 110.75 x 82.51 mm/<br>5.12 x 4.35 x 3.25 in                                                                                                                                                                    |
| <b>Weight</b>     | 0.078 kg/0.171 lb                            | 0.08 kg/0.176 lb                                                                                                                                                                                                                          | 0.08 kg/0.176 lb                                                                                                                                                                                                                          | 160 g/0.352 lb                                                                                                                                                                                                         |

## Basic Docking Station

### Simple charger



| Part Number | AIM-P508A0                                                                                                                                                    |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Features    | 1 x Micro USB charging port<br>Micro USB 18W adapter/power cord are optional,<br>Adapter PN: XAIM-A16-018N1A<br>Power cord PN: refer to page 2<br>1 x USB 2.0 |
| Dimensions  | 180 x 140 x 120 mm/7.08 x 5.51 x 4.72 in                                                                                                                      |
| Weight      | 450 g/0.99 lb                                                                                                                                                 |

**Kreski**

Zapraszamy do kontaktu!  
Więcej informacji: [www.kreski.pl](http://www.kreski.pl)

## Accessories

### Hand strap



### Shoulder strap



### 360° rotatable hand strap



### Holster



Stylus holder

| Part Number | AIM-SRP0-0000                        | AIM-SRP0-0001                                | AIM-SRP0-0004                               | AIM-HOL0-0160                              |
|-------------|--------------------------------------|----------------------------------------------|---------------------------------------------|--------------------------------------------|
| Features    | 1 x Black strap<br>1 x Stylus holder | 1 x Black strap<br>1 x Stylus holder         | 1 x Black strap that supports 360° rotation | 1 x Black holster                          |
| Dimensions  | 240 x 20 mm/<br>9.44 x 0.78 in       | 380 x 135 x 20 mm/<br>14.96 x 5.31 x 0.78 in | 160 x 160 mm/<br>6.3 x 6.3 in               | 250 x 150 x 30 mm/<br>9.84 x 5.9 x 1.18 in |
| Weight      | 0.022 kg/0.048 lb                    | 0.05 kg/0.11 lb                              | 158 g/0.35 lb                               | 0.23 kg/0.5 lb                             |

### Battery with meter



### Active stylus



### AIM8 AG+AR screen protection film



| Part Number | AIM-BAT0-0252                            | AIM-P705                    | AIM-EXT0-0181                                                   |
|-------------|------------------------------------------|-----------------------------|-----------------------------------------------------------------|
| Features    | 1 x Black battery                        | 1 x Black stylus pen        | Surface Hardness: 2 ~ 3H<br>Reflection Rate: 0.15%<br>Haze: 15% |
| Dimensions  | 98 x 84.5 x 6.5 mm/3.85 x 3.32 x 0.25 in | 140 x 9.7 mm/5.51 x 0.38 in | 212 x 128 x 0.15 mm/8.35 x 5.04 x 0.006 in                      |
| Weight      | 0.104 kg/0.229 lb                        | 0.02 kg/0.044 lb            | 0.009 kg/0.02 lb                                                |