



# INSTALLATION INSTRUCTIONS

**Product**  
**7160-0033**

**SEAT MOUNT**

**Revision**  
**Rev.E**

**Form**  
**INST-324**


**Printing Spec:PS-001**



**WARNING**



- You must read and follow all of these installation instructions. Failure to follow the installation instructions may result in serious bodily injury or death
- DO NOT install or use this assembly in the area in which the airbag on the vehicle may be deployed. The installer and user of this assembly are responsible for installing and using this assembly outside the area in which an airbag may be deployed. (See Product Mounting Disclaimer Below)
- Keep these installation instructions with the product and readily available in the vehicle for future reference of other users of the product.
- Additional copies of the installation instruction can be obtained from Gamber-Johnson. If you need assistance or have any questions, go to [www.gamberjohnson.com](http://www.gamberjohnson.com) or call Gamber-Johnson at 1-800-456-6868.
- DO NOT remove the warning label from product under any circumstances.

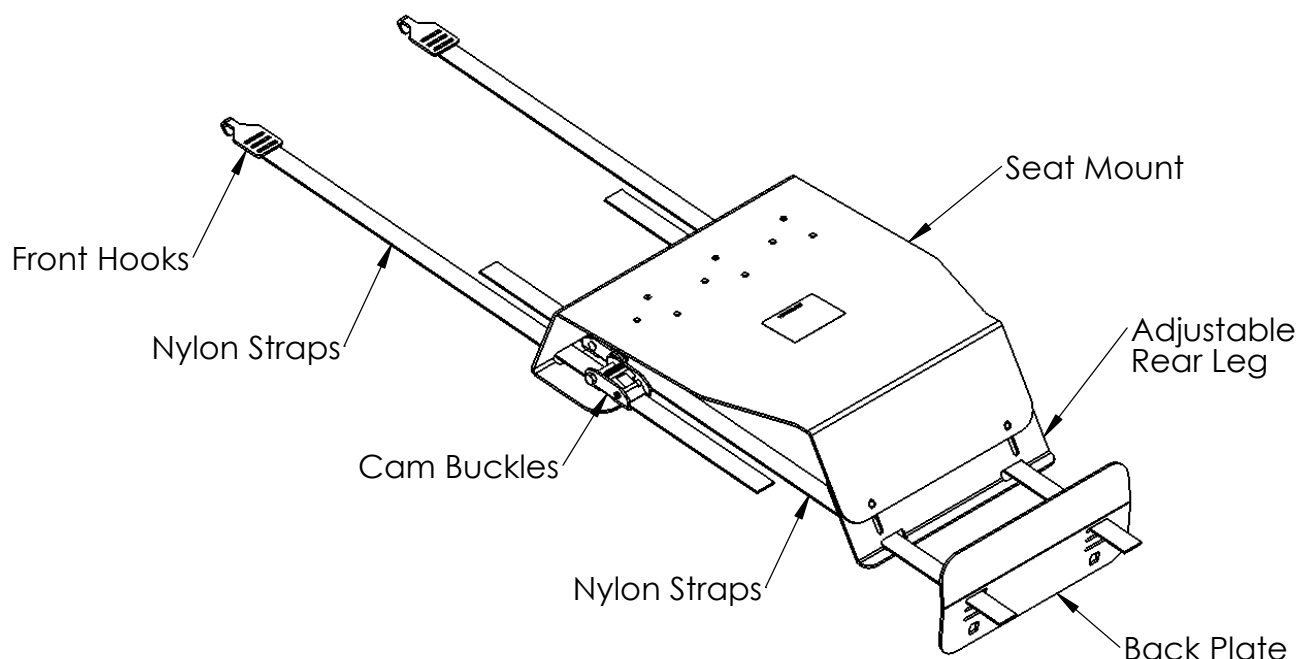

**Product Mounting Disclaimer**

Gamber-Johnson is not liable under any theory of contract or tort law for any loss, damage, personal injury, special, incidental or consequential damages for personal injury or other damage of any nature arising directly or indirectly as a result of the improper installation or use of its products in vehicle or any other application. In order to safely install and use Gamber-Johnson products full consideration of vehicle occupants, vehicle systems (i.e., the location of fuel lines, brakes lines, electrical, drive train or other systems), air-bags and other safety equipment is required. Gamber-Johnson specifically disclaims any responsibility for the improper use or installation of its products not consistent with the original vehicle manufactures specifications and recommendations, Gamber-Johnson product instruction sheets, or workmanship standards as endorsed through the Gamber-Johnson Certified Installer Program.

© Copyright 2017 Gamber-Johnson, LLC

If you need assistance or have questions, call Gamber-Johnson at 1-800-456-6868

## Attaching the seat mount to the seat

1. Set the seat mount on the passenger seat and push the back plate through the opening between the seat cushion and the seat backrest. The plate should hang behind the seat.

**See Figures 1 & 2.**

2. Adjust the rear leg on the seat mount so the top of the mount sits level when sitting on the seat. To adjust the rear leg, loosen the (2) 1/4" nuts on the inside of the mount. Raise or lower the leg and tighten the nuts back in place.

**See Figure 3.**

4. To tighten the seat mount in place, pull the (2) nylon straps (that are attached to the back plate) while pushing the seat mount back into the opening between the seat cushion and backrest. The short flange on the adjustable rear leg should go between the seat cushion and the backrest. Pull the straps until the mount is tight.


**See Figures 1&3.**

4. Run the front hooks under the seat and attach to the rectangular cutouts on the back plate. Push downward on the front of the seat mount while pulling the (2) nylon straps inside the seat mount until the front of the mount is held tight.


**See Figures 1&2.**

5. Reajust the rear leg if the mount is no longer level once tightened in place.


**See Figure 3.**

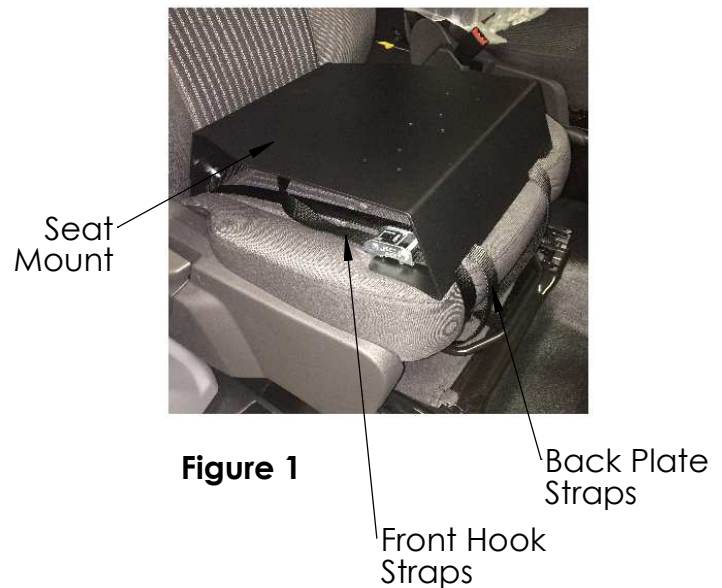

**Figure 1**

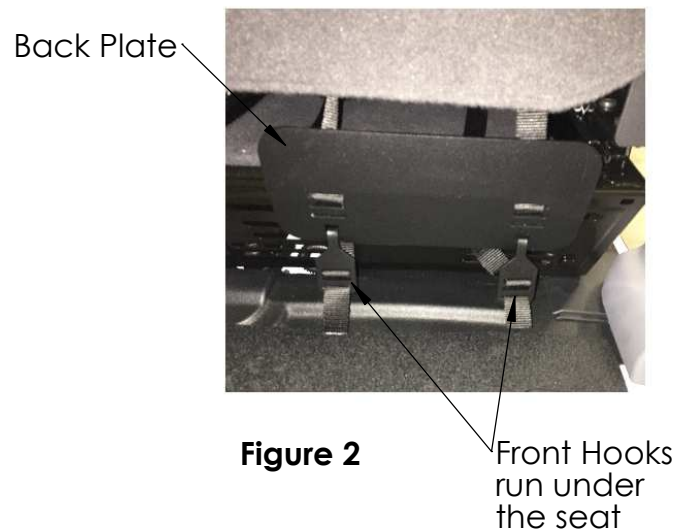

**Figure 2**

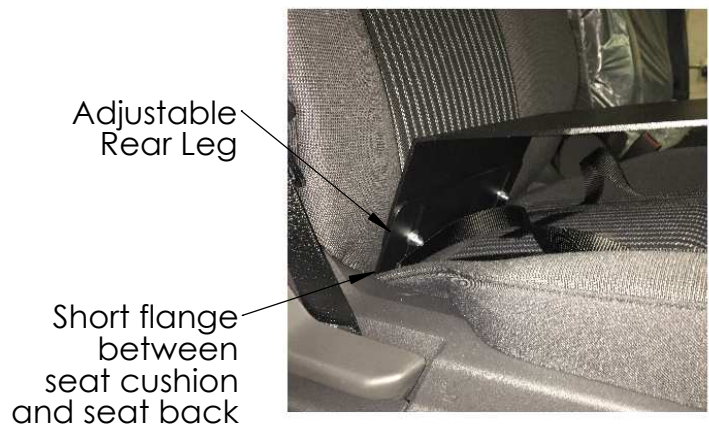

**Figure 3**

## Removing the seat mount to the seat

5. The seat mount can be quickly removed, allowing use of the passenger seat.

To remove, depress the latch on each cam buckle to loosen each nylon strap. Unhook the front hooks from the back plate and pull the back plate through the opening between the seat cushion and backrest.

**See Figure 4.**



**Figure 4**

Cam Buckles



- This assembly should not be positioned in the area where the airbag may be deployed.
- DO NOT position the equipment in front of an airbag. Equipment positioned in front of an airbag may cause serious injury or death if an airbag is activated.
- If installation of the equipment requires that the equipment be placed in front of an airbag, the airbag should be deactivated. In order to secure permission for deactivating the airbag you must contact the National Highway Traffic Safety Administration at 1-800-424-9393 to gain permission to do so. If you have any questions or need assistance, call Gamber-Johnson at 1-800-456-6868.
- High speed vehicle turns may cause parts of the assembly to swivel, interfering with the driver or other equipment.

**Kreski**

Zapraszamy do kontaktu!  
Więcej informacji: [www.kreski.pl](http://www.kreski.pl)