



RF750

STREAMLINE YOUR
WORKFLOW AND
MAXIMIZE EFFICIENCY
WITH UHF TECHNOLOGY
-MADE FOR PM75







Retail



Industrial Production Process Control

Nominal Read Range 6m+ (19.69ft+)



Logistics / Warehouse Management




Medical / Pharmacy

Specifications

Dimensions	
Standard	83.05 mm W x 160.5 mm L x 168.25 mm F
Weight	471.6g with standard battery (only RF750)
Power	
Battery	3,250 mAh 3.6V Li-ion, removable
Buttons	Trigger, Power, Trigger Mode, Connection Mode
Standard Communications	USB interface
Power Supply	5V/2A adaptor
Notification	Charging LED, Status LED, Connect-Mode, Trigger-Mode LED, Vibration
DEDECIDMA	NCE CHARACTERISTICS

Fastest Read Rate	up to 900 tags per second
Frequency /	EU: 865MHz ~ 868MHz
RF Output	= <30dBm (± 0.3dBm)
	US: 902MHz ~ 928MHz
	= <30dBm (± 0.3dBm)
Memory	
RAM	160 KB
ROM	1MB
USER ENVIR	ONMENT
Operating Temperature	-10°C to 50°C
Storage Temperature	-40°C to 70°C
Drop	1.5m to concrete
Rain / Dust Proof (Sealing)	IP54
WIRELESS	
Bluetooth	Bluetooth Ver. 4.2 BR/EDR/BLE

Tap-to-Pair

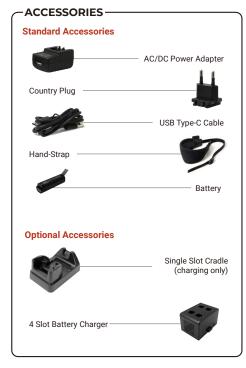

Corporate Headquarters

RFID Engine

EPC Global UHF Class 1 Gen 2 V2 / ISO 18000-63

Impinj® Indy® R2000

Point Mobile Co., Ltd. pm_sales1@pointmobile.com +82 2 3397 7870

NA Headquarters

Point Mobile Americas LLC info@pointmobileamericas.com +1 425 780 4452

NFC

Europe Headquarters

Point Mobile Europe GmbH info.pmeg@pointmobile.com +49 6196 777 3666

China Headquarters

Point Mobile China info@pointmobile.com.cn +86 755 8869 1169





