


> APR6

Very good printing quality
High speed printing capability
Excellent receptor multi-compatibility and sensitivity

Kreski
Zapraszamy do kontaktu!
Więcej informacji: www.kreski.pl

APR®6 is the standard wax-resin ribbon of the inkanto range:


very versatile, it has been conceived to print all kinds of self-adhesive labels at the lowest heat settings. It also provides a higher level of mechanical resistance compared to wax ribbons.

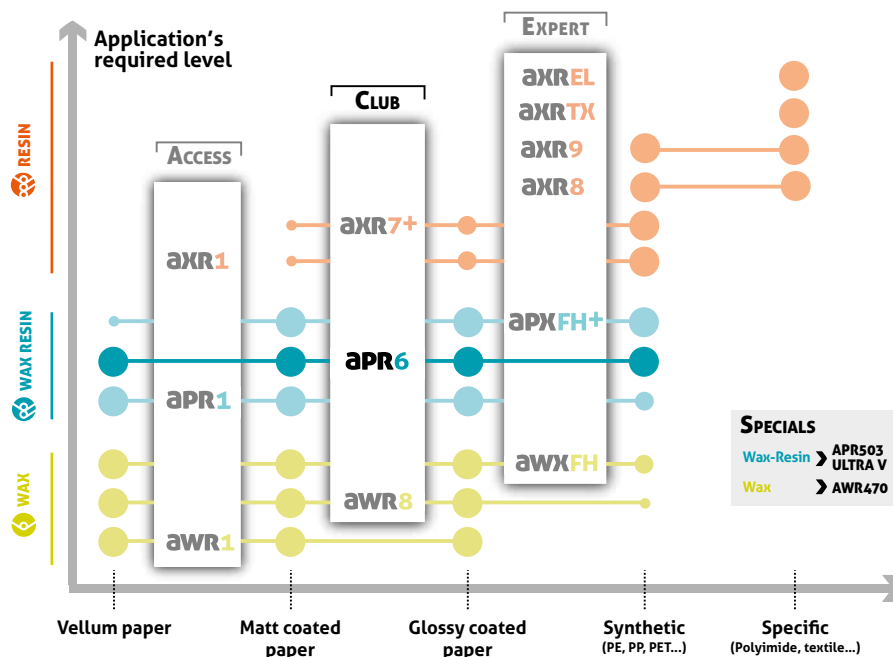


Printing receptor

papers		synthetics	
Vellum	•••	PP	•••
Coated	•••	PE	•••
Glossy coated	•••	PET	•••

Printer settings

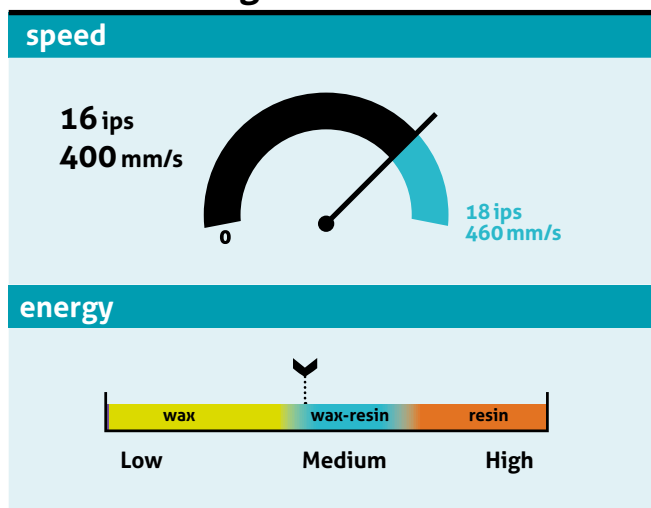

Print resistance

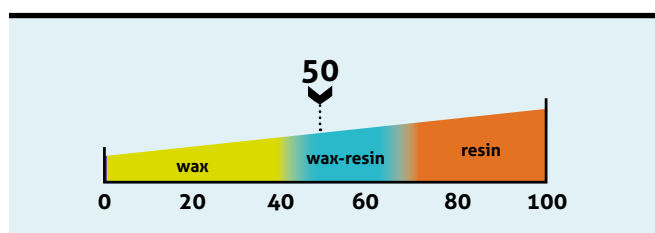

Compliant with the following regulations

REACH / SVHC 1907/2006/EC
Food Contact 1935/2004/EC
Heavy metals 2011/65/EU
California Proposition 65
Halogen restrictions
UL 969

Your ribbon identity

Colours: • • • • • • •

Length (m):

Width (mm):

Part number:

Your distributor:

Contact:

Application fields



Product performance

print quality		
90°Barcode	85	A _a Small characters
0°Barcode	100	2D Barcode
		Logos
		Blackness *Optical Density by Reflection, measured using a densitometer.
technical resistances		
Heat	100°C 212°F	Light/Blue Wool
Water/Submerge	100	Solvents
		Rubbing

Product physico-chemical features

product structure		
	PET film	Thickness: 4,5 µm
	Ink	Wax-Resin
	Melting point	75°C/167°F
	Backcoating	Silicon based
	Coefficient of Friction	Kd < 0.2
	Ribbon thickness	< 9 µm
The ribbon is anti static build-up treated		

Storage

storage conditions

12 months recommended
20-80 % Humidity Rate, 5-35°C (40-95°F)

Waste management

inkanto rolls and their packaging allow an optimised waste management. For more information please contact ARMOR.