

> aWR1


Competitiveness
Good printing quality
Receptor multi-compatibility

Kreski

Zapraszamy do kontaktu!
Więcej informacji: www.kreski.pl

AWR®1 is the most competitive wax ribbon of the inkanto range.


AWR®1 is the ideal solution for applications particularly sensitive to the quality/price ratio.

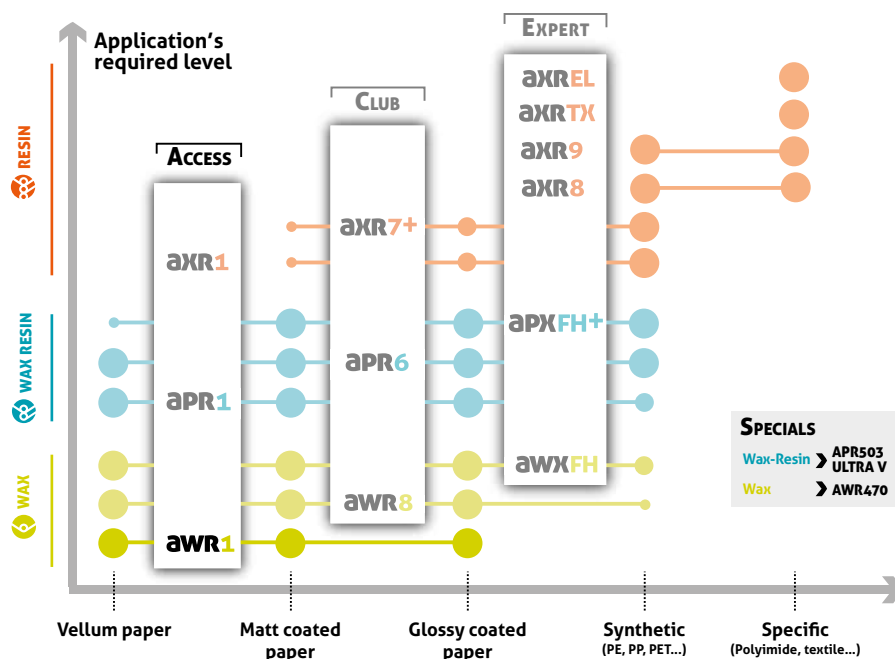


Printing receptor

papers	
Vellum	● ● ●
Coated	● ● ●
Glossy coated	● ● ●

Printer settings

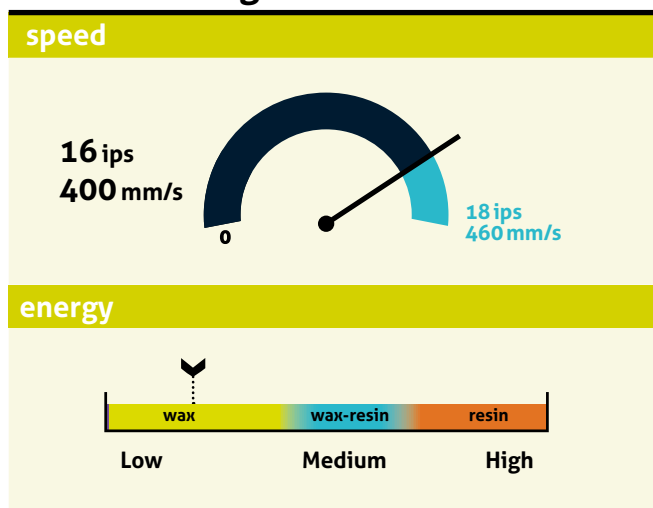

Print resistance

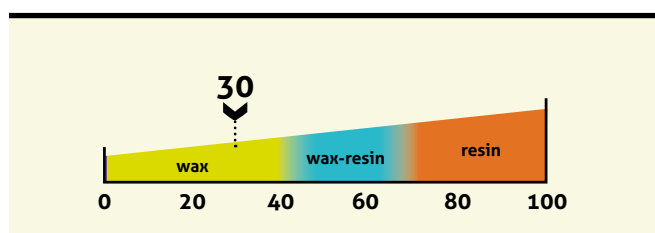

Compliant with the following regulations

REACH / SVHC 1907/2006/EC
Food Contact 1935/2004/EC
Heavy metals 2011/65/EU
California Proposition 65
Halogen restrictions

Your ribbon identity

Colours: ● ● ● ● ●

Length (m):


Width (mm):

Part number:

Your distributor:

Contact:

Application fields

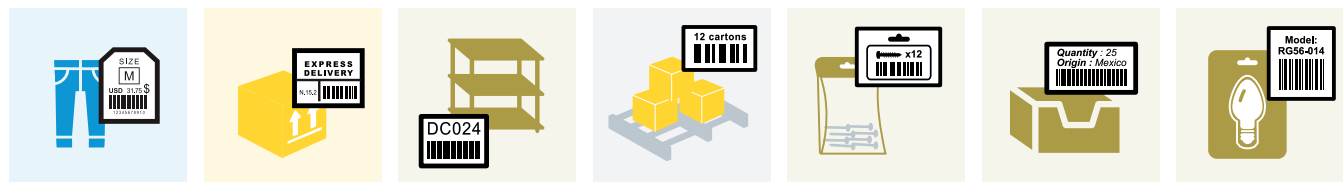

Product performance

print quality		
90°Barcode 60	Small characters 80	Logos 95
0°Barcode 100	2D Barcode 100	Blackness 2,1 ODR* *Optical Density by Reflection, measured using a densitometer.
technical resistances		
Heat 60°C 140°F	Light/Blue Wool >7	Solvents 100
Water/Submerge 100	Rubbing 30	

Product physico-chemical features

product structure		
	PET film	Thickness: 4,5 µm
	Ink	Wax
	Melting point	65°C/149°F
	Backcoating	Silicon based
	Coefficient of Friction	Kd < 0.2
	Ribbon thickness	< 8 µm
	The ribbon is anti static build-up treated	

Storage

storage conditions

12 months recommended

20-80 % Humidity Rate, 5-35°C (40-95°F)

Waste management

inkanto rolls and their packaging allow an optimised waste management. For more information please contact ARMOR.