

> aWR8


Receptor multi-compatibility
Excellent blackness
Competitiveness

Kreski

Zapraszamy do kontaktu!
Więcej informacji: www.kreski.pl

AWR®8 is the standard ribbon from the inkanto wax range.

It doesn't make any compromise to quality and printing performance and therefore matches all criteria expected by a traditional wax application.

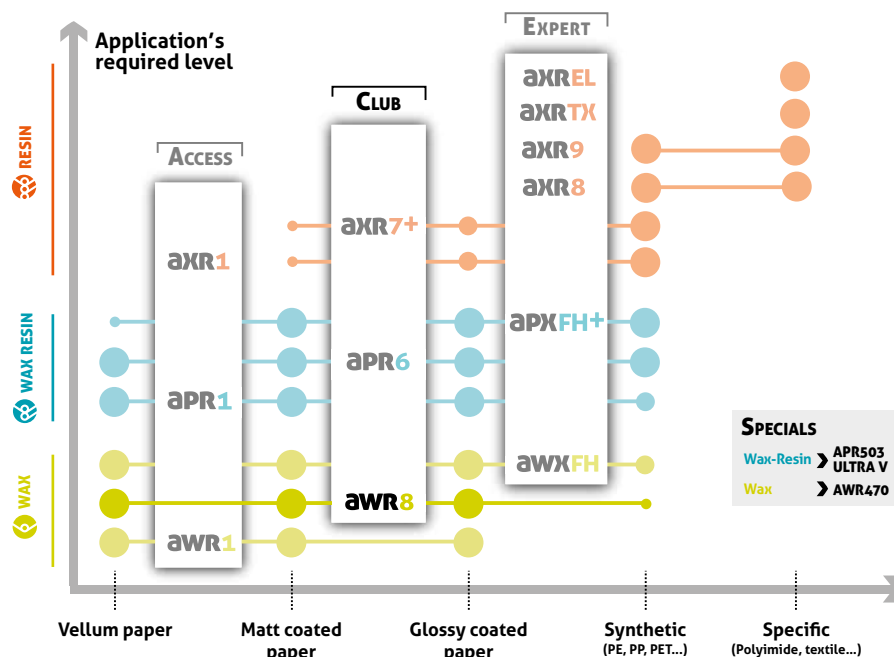

Printing receptor

papers		synthetics	
Vellum	● ● ●	PP	● ○ ○
Coated	● ● ●	PE	● ○ ○
Glossy coated	● ● ●	PET	● ○ ○

Printer settings


speed



energy



Print resistance

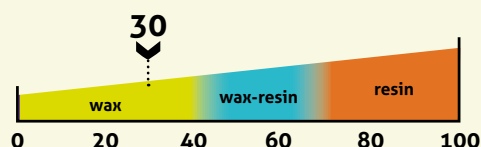

Compliant with the following regulations

REACH / SVHC 1907/2006/EC

Food Contact 1935/2004/EC

Heavy metals 2011/65/EU

California Proposition 65

Halogen restrictions

Your ribbon identity

Colours: ● ● ● ● ●

Length (m):

Width (mm):

Part number:

Your distributor:

Contact:

Application fields



Product performance

print quality		
90°Barcode		A_a Small characters
0°Barcode		2D Barcode
		Logos
		Blackness *Optical Density by Reflection, measured using a densitometer.
technical resistances		
Heat		Light/Blue Wool
Water/Submerge		Solvents
		Rubbing

Product physico-chemical features

product structure		
	PET film	Thickness: 4,5 µm
	Ink	Wax
	Melting point	65°C/149°F
	Backcoating	Silicon based
	Coefficient of Friction	Kd < 0.2
Ribbon thickness		< 9 µm
The ribbon is anti static build-up treated		

Storage

storage conditions

12 months recommended

20-80 % Humidity Rate, 5-35°C (40-95°F)

Waste management

inkanto rolls and their packaging allow an optimised waste management. For more information please contact ARMOR.