


> aXR1

Competitiveness
Good printing quality
Receptor multi-compatibility



Zapraszamy do kontaktu!
 Więcej informacji: www.kreski.pl


aXR®1 is a resin ribbon which combines competitiveness and performance.
 It is suited for the most demanding applications in terms of durability and cost.

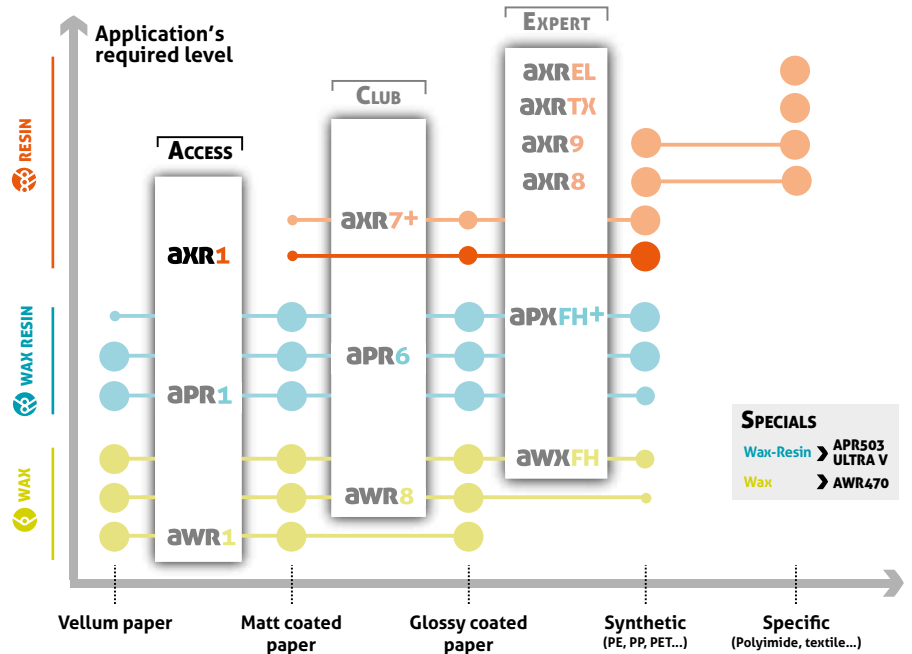


Printing receptor

papers		synthetics	
Coated	●●●	PP	●●●
Glossy coated	●●●	PE	●●●
		PET	●●●

Printer settings

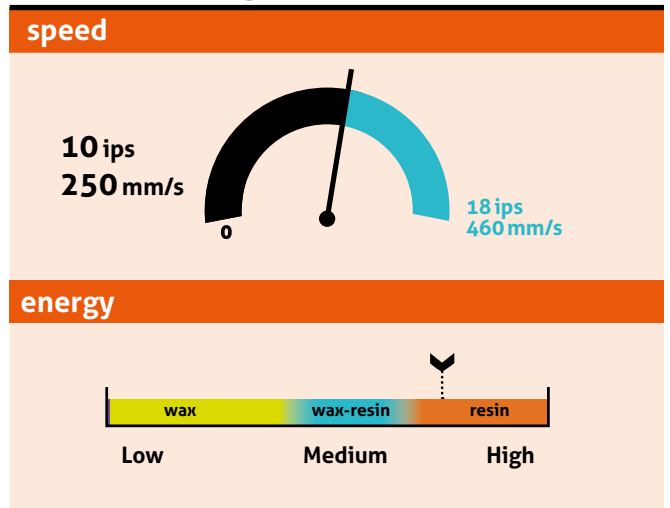

Print resistance

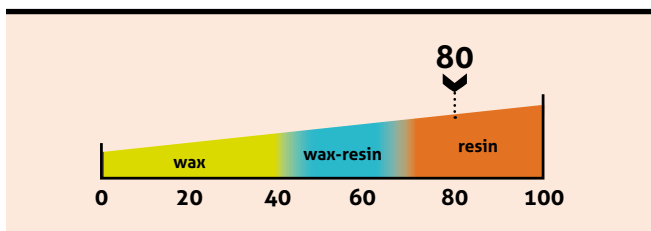

Compliant with the following regulations

REACH / SVHC 1907/2006/EC
Food Contact 1935/2004/EC
Heavy metals 2011/65/EU
California Proposition 65
UL 969

Your ribbon identity

Colours: ● ○ ● ● ●


Length (m):

Width (mm):

Part number:


Your distributor:

Contact :





Application fields

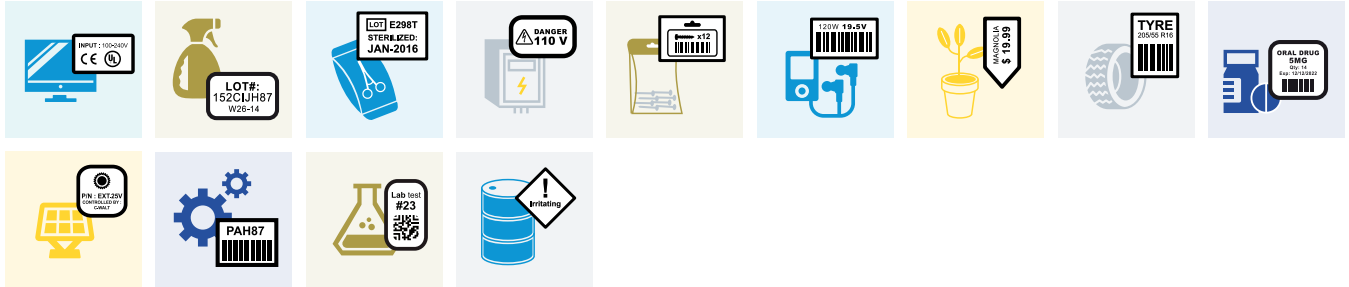

Product performance

print quality					
90°Barcode		A _a Small characters		Logos	
0°Barcode		2D Barcode		Blackness	
technical resistances					
Heat		Light/Blue Wool	>7 gauge"/>	Solvents	
Water/Submerge		Rubbing		Rubtester: 939g, no damage after ... cycles : IPA: 140 Ethanol: 25 Mineral Spirit: 50 Unleaded gasoline 98: nr* Motor oil: 250 Brake fluid: nr* *not recommended	

Product physico-chemical features

product structure	
PET film	Thickness: 4,5 µm
Ink	Resin
Melting point	80°C/176°F
Backcoating	Silicon based
Coefficient of Friction	Kd < 0.2
Ribbon thickness	< 9 µm
The ribbon is anti static build-up treated	

Storage

storage conditions

12 months recommended
 20-80 % Humidity Rate, 5-35°C (40-95°F)

Waste management

inkanto rolls and their packaging allow an optimised waste management. For more information please contact ARMOR.