

CT45, CT45 XP, CT40 & CT40 XP MOBILE COMPUTER

Includes the CT45, CT45 XP, CT40,
CT40 HC, CT40 DRH, CT40 XP,
CT40 XP DRH and CT40 XP HC

Accessories Guide

The Kreski logo is located in the bottom left corner, enclosed in a rounded rectangle. It features the word "Kreski" in a bold, sans-serif font, with a stylized graphic element to the left consisting of three horizontal bars of increasing height.

Zapraszamy do kontaktu!
Więcej informacji: www.kreski.pl

Honeywell

TABLE OF CONTENTS



3	Chargers
3	Booted Universal Docks for Charging CT45 and CT40 Product Family
6	Non-Booted Universal Docks for Charging CT45 and CT40 Product Family
8	Booted and Non-Booted Universal Docks for Healthcare
8	Battery Version
9	Mobile
11	Power Supply
12	Scan Handles
13	Soft Goods
14	Accessories
15	AC Line Cords



Zapraszamy do kontaktu!
Więcej informacji: www.kreski.pl

CHARGERS

Booted Universal Docks for Charging CT45 and CT40 Product Family



CT40-CB-UVB-0

Standard CT40 Booted Charge Base

For recharging up to four computers with protective boot (CT40-PB-00, CT40-PB-XP, or CT45-PB-1). Kit includes 4-bay charger and power supply. Power cord must be ordered separately.



CT40-CB-UVB-1

CT40 Booted Charge Base (U.S.)

For recharging up to four computers with protective boot (CT40-PB-00, CT40-PB-XP, or CT45-PB-1). Kit includes 4-bay charger, power supply and U.S. power cord.



CT40-CB-UVB-2

CT40 Booted Charge Base (EU)

For recharging up to four computers with protective boot (CT40-PB-00, CT40-PB-XP, or CT45-PB-1). Kit includes 4-bay charger, power supply and EU power cord.



CT40-CB-UVB-3

CT40 Booted Charge Base (UK)

For recharging up to four computers with protective boot (CT40-PB-00, CT40-PB-XP, or CT45-PB-1). Kit includes 4-bay charger, power supply and UK power cord.



CT40-NB-UVB-0

Standard CT40 Booted Net Base

For Ethernet communications and recharging up to four computers with protective boot (CT40-PB-00, CT40-PB-XP, or CT45-PB-1). Kit includes net base and power supply. Power cord must be ordered separately.



CT40-NB-UVB-1

CT40 Booted Net Base (U.S.)

For Ethernet communications and recharging up to four computers with protective boot (CT40-PB-00, CT40-PB-XP, or CT45-PB-1). Kit includes net base, power supply and U.S. power cord.



CT40-NB-UVB-2

CT40 Booted Net Base (EU)

For Ethernet communications and recharging up to four computers with protective boot (CT40-PB-00, CT40-PB-XP, or CT45-PB-1). Kit includes net base, power supply and EU power cord.



CT40-NB-UVB-3

CT40 Booted Net Base (UK)

For Ethernet communications and recharging up to four computers with protective boot (CT40-PB-00, CT40-PB-XP, or CT45-PB-1). Kit includes net base, power supply and UK power cord.



CT40-EB-UVB-0

Standard CT40 Booted Ethernet Base

For recharging computer with protective boot (CT40-PB-00, CT40-PB-XP, or CT45-PB-1), battery and Ethernet communications. Kit includes Ethernet home base and power supply. Power cord must be ordered separately. Supports USB client via USB Type B connector.



CT40-EB-UVB-1

CT40 Booted Ethernet Base (U.S.)

For recharging computer with protective boot (CT40-PB-00, CT40-PB-XP, or CT45-PB-1), battery and Ethernet communications. Kit includes Ethernet home base, power supply and U.S. power cord. Supports USB client via USB Type B connector.



CT40-EB-UVB-2

CT40 Booted Ethernet Base (EU)

For recharging computer with protective boot (CT40-PB-00, CT40-PB-XP, or CT45-PB-1), battery and Ethernet communications. Kit includes Ethernet home base, power supply and EU power cord. Supports USB client via USB Type B connector.



CT40-EB-UVB-3

CT40 Booted Ethernet Base (UK)

For recharging computer with protective boot (CT40-PB-00, CT40-PB-XP, or CT45-PB-1), battery and Ethernet communications. Kit includes Ethernet home base, power supply and UK power cord. Supports USB client via USB Type B connector.

Booted Universal Docks for Charging CT45 and CT40 Product Family



CT40-HB-UVB-0

Standard CT40 Booted Home Base

For recharging computer with protective boot (CT40-PB-00, CT40-PB-XP, or CT45-PB-1) and a spare battery. Kit includes home base and power supply. Power cord must be ordered separately. Supports USB client via USB Type B connector.



CT40-HB-UVB-1

CT40 Booted Home Base (U.S.)

For recharging computer with protective boot (CT40-PB-00, CT40-PB-XP, or CT45-PB-1) and a spare battery. Kit includes home base, power supply and U.S. power cord. Supports USB client via USB Type B connector.



CT40-HB-UVB-2

CT40 Booted Home Base (EU)

For recharging computer with protective boot (CT40-PB-00, CT40-PB-XP, or CT45-PB-1) and a spare battery. Kit includes home base, power supply and EU power cord. Supports USB client via USB Type B connector.



CT40-HB-UVB-3

CT40 Booted Home Base (UK)

For recharging computer with protective boot (CT40-PB-00, CT40-PB-XP, or CT45-PB-1) and a spare battery. Kit includes home base, power supply and UK power cord. Supports USB client via USB Type B connector.



CT40-DB-UVB-0

Standard CT40 Booted Display Dock

For recharging computer with protective boot (CT40-PB-00, CT40-PB-XP, or CT45-PB-01), connection with an external display, extending I/O for HDMI, Ethernet communications and three USB ports. Kit includes display base and power supply. Power cord must be ordered separately.



CT40-DB-UVB-1

CT40 Booted Display Dock (U.S.)

For recharging computer with protective boot (CT40-PB-00, CT40-PB-XP, or CT45-PB-1), connection with an external display, extending I/O for HDMI, Ethernet communications and three USB ports. Kit includes display base, power supply and U.S. power cord.



CT40-DB-UVB-2

CT40 Booted Display Dock (EU)

For recharging computer with protective boot (CT40-PB-00, CT40-PB-XP, or CT45-PB-1), connection with an external display, extending I/O for HDMI, Ethernet communications and three USB ports. Kit includes display base, power supply and EU power cord.



CT40-DB-UVB-3

CT40 Booted Display Dock (UK)

For recharging computer with protective boot (CT40-PB-00, CT40-PB-XP, or CT45-PB-1), connection with an external display, extending I/O for HDMI, Ethernet communications and three USB ports. Kit includes display base, power supply and UK power cord.



CT40-CB-PB-0

Standard Charge Base for use with TPU Boot

For recharging up to four computers. Kit includes dock and power supply. Excludes power cord. Compatible with CT40 with TPU boot only.



CT40-CB-PB-1

Charge Base for use with TPU Boot (U.S.)

For recharging up to four computers. Kit includes dock, power supply and U.S. power cord. Compatible with CT45 and CT45 with TPU boot only.



CT40-CB-PB-2

Charge Base for use with TPU Boot (EU)

For recharging up to four computers. Kit includes dock, power supply and EU power cord. Compatible with CT40 and CT45 with TPU boot only.



CT40-CB-PB-3

Charge Base for use with TPU Boot (UK)

For recharging up to four computers. Kit includes dock, power supply and UK power cord. Compatible with CT40 and CT45 with TPU boot only.

CHARGERS, Continued



Booted Universal Dock for Charging CT45 and CT40 Product Family



CT40-NB-PB-0

Standard Net Base for use with TPU Boot

For Ethernet communications and recharging up to four computers. Kit includes dock and power supply. Excludes power cord. Compatible with CT40 and CT45 with TPU boot only.



CT40-NB-PB-1

Net Base for use with TPU Boot (U.S.)

For Ethernet communications and recharging up to four computers. Kit includes dock, power supply, and U.S. power cable. Compatible with CT40 and CT45 with TPU boot only.



CT40-NB-PB-2

Net Base for use with TPU Boot (EU)

For Ethernet communications and recharging up to four computers. Kit includes dock, power supply, and EU power cable. Compatible with CT40 and CT45 with TPU boot only.



CT40-NB-PB-3

Net Base for use with TPU Boot (UK)

For Ethernet communications and recharging up to four computers. Kit includes dock, power supply and UK power cable. Compatible with CT40 and CT45 with TPU boot only.



Zapraszamy do kontaktu!
Więcej informacji: www.kreski.pl

Non-Booted Universal Docks for Charging CT45 and CT40 Product Family



CT40-CB-UVN-0

Standard CT40 Non-Booted Charge Base

For recharging up to four computers only. Kit includes 4-bay charger and power supply. Power cord must be ordered separately.



CT40-CB-UVN-1

CT40 Non-Booted Charge Base (U.S.)

For recharging up to four computers only. Kit includes 4-bay charger, power supply and U.S. power cord.



CT40-CB-UVN-2

CT40 Non-Booted Charge Base (EU)

For recharging up to four computers only. Kit includes 4-bay charger, power supply and EU power cord.



CT40-CB-UVN-3

CT40 Non-Booted Charge Base (UK)

For recharging up to four computers only. Kit includes 4-bay charger, power supply and UK power cord.



CT40-NB-UVN-0

Standard CT40 Non-Booted Net Base

For Ethernet communications and recharging up to four computers (no boots). Kit includes net base and power supply. Power cord must be ordered separately.



CT40-NB-UVN-1

CT40 Non-Booted Net Base (U.S.)

For Ethernet communications and recharging up to four computers (no boots). Kit includes net base, power supply and U.S. power cord.



CT40-NB-UVN-2

CT40 Non-Booted Net Base (EU)

For Ethernet communications and recharging up to four computers (no boots). Kit includes net base, power supply and EU power cord.



CT40-NB-UVN-3

CT40 Non-Booted Net Base (UK)

For Ethernet communications and recharging up to four computers (no boots). Kit includes net base, power supply and UK power cord.



CT40-EB-UVN-0

Standard CT40 Non-Booted Ethernet Base

For recharging computer, battery and Ethernet communications. Kit includes Ethernet home base and power supply. Power cord must be ordered separately. Supports USB client via USB Type B connector.



CT40-EB-UVN-1

CT40 Non-Booted Ethernet Base (U.S.)

For recharging computer, battery and Ethernet communications. Kit includes Ethernet home base, power supply and U.S. power cord. Supports USB client via USB Type B connector.



CT40-EB-UVN-2

CT40 Non-Booted Ethernet Base (EU)

For recharging computer, battery and Ethernet communications. Kit includes Ethernet home base, power supply and EU power cord. Supports USB client via USB Type B connector.



CT40-EB-UVN-3

CT40 Non-Booted Ethernet Base (UK)

For recharging computer, battery and Ethernet communications. Kit includes Ethernet home base, power supply and UK power cord. Supports USB client via USB Type B connector.

Non-Booted Universal Docks for Charging CT45 and CT40 Product Family



CT40-HB-UVN-0

Standard CT40 Non-Booted Home Base

For recharging computer and one spare battery. Kit includes home base and power supply. Power cord must be ordered separately. Supports USB client via USB Type B connector.



CT40-HB-UVN-1

CT40 Non-Booted Home Base (U.S.)

For recharging computer and one spare battery. Kit includes home base, power supply and U.S. power cord. Supports USB client via USB Type B connector.



CT40-HB-UVN-2

CT40 Non-Booted Home Base (EU)

For recharging computer and one spare battery. Kit includes home base, power supply and EU power cord. Supports USB client via USB Type B connector.



CT40-HB-UVN-3

CT40 Non-Booted Home Base (UK)

For recharging computer and one spare battery. Kit includes home base, power supply and UK power cord. Supports USB client via USB Type B connector.



CT40-DB-UVN-0

Standard CT40 Non-Booted Display Dock

For recharging computer, connection with an external display, extending I/O for HDMI, Ethernet communications and three USB ports. Kit includes display base and power supply. Power cord must be ordered separately.



CT40-DB-UVN-1

CT40 Non-Booted Display Dock (U.S.)

For recharging computer, connection with an external display, extending I/O for HDMI, Ethernet communications and three USB ports. Kit includes display base, power supply, and U.S. power cord.



CT40-DB-UVN-2

CT40 Non-Booted Display Dock (EU)

For recharging computer, connection with an external display, extending I/O for HDMI, Ethernet communications and three USB ports. Kit includes display base, power supply, and EU power cord.



CT40-DB-UVN-3


CT40 Non-Booted Display Dock (UK)

For recharging computer, connection with an external display, extending I/O for HDMI, Ethernet communications and three USB ports. Kit includes display base, power supply, and UK power cord.

CHARGERS, Continued




Booted and Non-Booted Universal Docks for Healthcare

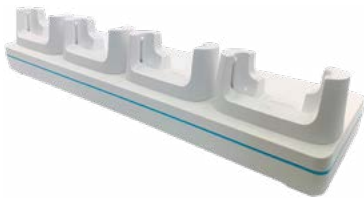

CT40-NB-UVB-HC0

Standard CT40 Booted HC Net Base

For Ethernet communications and recharging up to four computers with protective boot. Kit includes 4-bay HC net base and power supply. Power cord must be ordered separately.

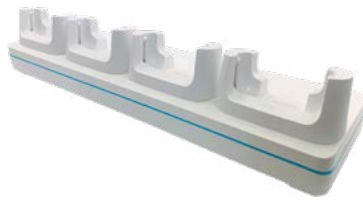

CT40-NB-UVN-HC0

Standard CT40 Non-Booted HC Net Base

For Ethernet communications and recharging up to four computers. Kit includes 4-bay HC net base and power supply. Power cord must be ordered separately.



CT40-DB-UVB-HC0

Standard CT40 Booted HC Display Dock

For charging a computer with protection boot, connection with an external display, extending I/O for HDMI, Ethernet communications and three USB ports. Kit includes HC display base and power supply. Power cord must be ordered separately.



CT40-DB-UVN-HC0

Standard CT40 Non-Booted HC Display Dock

For charging the computer, connection with an external display, extending I/O for HDMI, Ethernet communications and three USB ports. Kit includes HC display base and power supply. Power cord must be ordered separately.

Battery Version



CT40-QBC-0

Standard QBC

For recharging up to four batteries. Kit includes dock and power supply. Power cord must be ordered separately.



CT40-QBC-1

QBC (U.S.)

For recharging up to four batteries. Kit includes dock, power supply and U.S. power cord.



CT40-QBC-2

QBC (EU)

For recharging up to four batteries. Kit includes dock, power supply and EU power cord.



CT40-QBC-3

QBC (UK)

For recharging up to four batteries. Kit includes dock, power supply and UK power cord.



CT40-SN-CNV

CT40 Booted and Non-Booted Snap-On Adapter

Charge CT40 and CT40 XP with or without protective boot. Provides tethered USB client connectivity. Compatible with hand strap, battery pack and scan handle. Charges mobile computer battery in three hours. Kit includes snap-on adapter with convertible adapter. Optional 50130570-001 (5 V, 2 A) USB power wall adapter sold separately. Remove convertible adapter to charge CT40, CT40 XP, CT45, and CT45 XP with protective boot.



CT45-SN-CNV

CT45 Booted and Non-Booted Snap-On Adapter

Charge CT45, CT45XP, CT40 and CT40XP with or without protective boot. Provides tethered USB client connectivity. Compatible with hand strap, battery pack and scan handle. Charges mobile computer battery in three hours. Kit includes snap-on adapter with convertible adapter. Optional 50130570-001 (5 V, 2 A) USB power wall adapter sold separately. Remove convertible adapter to charge CT40, CT40 XP, CT45, and CT45 XP with protective boot.



CT40-VD-CNV

CT40 Booted and Non-Booted Vehicle Dock

For charging CT40 and CT40 XP with or without protective boot, compatible with hand strap. NFC tag integrated for seamless pairing with mobile computer. Kit includes vehicle dock with convertible adapter. Remove convertible adapter to accommodate with CT40, CT45, CT40 XP and CT45 XP with protective boot.



CT45-VD-CNV

CT45 Booted and Non-Booted Vehicle Dock

For charging CT45 and CT45 XP with or without protective boot, compatible with hand strap. NFC tag integrated for seamless pairing with mobile computer. Kit includes vehicle dock with convertible adapter. Remove convertible adapter to accommodate with CT40, CT45, CT40 XP and CT45 XP with protective boot.



CT45-VD-CNV-SPK

CT45 Booted and Non-Booted Vehicle Dock with Extended Speaker

For charging CT45 and CT45 XP with or without protective boot, compatible with hand strap. NFC tag integrated for seamless pairing with mobile computer. Kit includes vehicle dock with convertible adapter. Remove convertible adapter to accommodate with CT40, CT45, CT40 XP and CT45 XP with protective boot.



50138169-001

Cigarette Lighter Power Adapter Cable

Cigarette lighter power adapter, 1.8 mm (0.07 in).



805-638-001

RAM Mount

Required for vehicle dock or vehicle holder. Consists of one 12.07 cm (4.75 in) adjustable pivot arm with two 3.8 cm (1.5 in) stainless steel balls and assembly hardware. Requires customer-supplied hardware to secure mount to vehicle.



CT40-HDST-35MM

PTT Headset

Enterprise headset with PTT function, 3.5 mm (0.14 in), 1.8 m (5.9 ft) length.



CT40-CVT-25MM

Audio Cable

3.5 mm (0.14 in) plug to 2.5 mm (0.1 in) socket adapter wire.



CT40-UCP-B

CT40 Booted Universal Cup

For one computer with protective boot. Dock, power supply and cables must be ordered separately.



CT40-UCP-N

CT40 Non-Booted Universal Cup

For one computer (no protective boot). Dock, power supply and cables must be ordered separately.



CT40-UCP-BHC

CT40 HC Booted Universal Cup

For one CT40 HC with protective boot. Dock, power supply and cables must be ordered separately.



CT40-UCP-NHC

CT40 HC Non-Booted Universal Cup

For one CT40 HC (no protective boot). Dock, power supply and cables must be ordered separately.



CT45-SN-IST

CT45-SN-IST

CT45 convertible adapter on CT45 Snap-on adapter. A plastic insert can be used with CT40-SN-CNV to accommodate CT45 product family.



CT45-VD-IST

CT45-VD-IST

CT45 convertible adapter on CT45 Vehicle docks. A plastic insert can be used with CT40-VD-CNV to accommodate CT45 product family.



Zapraszamy do kontaktu!
Więcej informacji: www.kreski.pl

POWER SUPPLY



318-055-011

Spare Battery Pack

CT40 battery pack, 4020 mAh, for use with CT40 configurations with plastic battery latch button (last two digits in part number begin with 0: CT40-L*N-xxxx0x). Cannot be used on CT45 product family.



318-055-067

Spare Battery Pack

CT40 and CT45 product family battery pack (replacing 318-055-015), 4020 mAh, for use with CT45, CT45 XP, CT40 and CT40 XP configurations with metal battery latch button.



318-055-H67

Spare Battery Pack

CT40 HC and CT40 XP HC battery pack (replacing 318-055-017), 4020 mAh, for use with CT40 HC and CT40XP HC.



318-055-D67

Spare Battery Pack

CT40 disinfectant ready battery pack, 4020 mAh, for use with CT40 disinfectant-ready configurations.



50121666-001

Desktop Power Supply

36 W power supply for use with Ethernet home base, charge-only home base and quad battery charger. Requires country-specific line cord to be ordered separately.



50121667-001

Quad Base Power Supply

84 W power supply for use with four-bay charging base and four-bay net base. Requires country-specific line cord to be ordered separately.



50130570-001

Power Plug Adapter Kit

USB power adapter (5 V, 2 A) kit for snap-on adapter. Includes EU, UK, U.S. and IN plugs.

CBL-500-120-S00-05

USB Cable

Charging and USB communication cable, USB Type A to Type C, 1.2 m (3.9 ft).

CT45-CIGR-1

Cigarette Lighter Adapter

Charging CT45, CT45XP, CT40 and CT40XP configurations on vehicle. Quick Charge 3.0 compliant. Requires CT45 USB adapter or USB cable to be ordered separately.



Zapraszamy do kontaktu!
Więcej informacji: www.kreski.pl

SCAN HANDLES



CT40-SH-DC

Scan Handle, Compatible with Charging Dock

Snaps easily on or off the CT40 and CT40 XP mobile computers. Compatible with charging docks, hand strap and snap-on adapter.



CT40-SH-PB

Scan Handle and TPU Boot

Kit includes CT40 scan handle and TPU boot. Compatible with all booted charging docks.



CT45-SH-UVN

CT45 Scan Handle, Non-Booted

Snaps easily on or off the CT45 and CT45 XP. Compatible with charging docks, hand strap and snap-on adapter, rear camera is exposed.



CT45-SH-UVB

CT45 Scan Handle, Booted

Snaps easily on or off the CT45 and CT45 XP with protective boot. Compatible with charging docks and snap-on adapter with no insert. Kit includes CT45 scan handle and TPU boot.



Zapraszamy do kontaktu!
Więcej informacji: www.kreski.pl

SOFT GOODS



825-238-001

Holster

Holster suitable for use with CT40, CT50 and CT60.



CT40-RB-00

CT40 Rubber Boot

Black rubber protective boot for CT40.



CT40-PB-XP

CT40 Hard Protective Boot

CT40 and CT40 XP protective boot (replacing CT40-PB-00). For use with CT40 booted accessories, including charging docks, display dock, booted scan handle and wearables.



825-237-001

Pouch

Pouch suitable for use with CT40, CT50 and CT60.



CT45-PB-1

CT45 Hard Protective Boot

CT45 and CT45 XP protective boot. Enhanced protection with overmolded housing. For use with CT45 booted accessories, including charging docks, display dock, booted scan handle and wearables.



Zapraszamy do kontaktu!
Więcej informacji: www.kreski.pl

ACCESSORIES



CT40-HS-3PK

Kit, Hand Strap (3/pk)

Kit of three replacement hand straps for CT40.



CT40-HS-HC

Healthcare Hand Strap (3/pk)

Manufactured with disinfectant-ready material.
Can be cleaned by approved disinfectant agents.



CT40-SP-1PK

Screen Protector (1/pk)

One self-adhesive screen protector.

CT40-QL-00

Quad Lock Case

Quad lock case to mount CT40 on Zebra RFD8500 RFID sled with quad lock.

856-065-004

Industrial-Grade Micro-SD Card

Micro-SD card, 1 GB, AF1GUDI, RoHS

Note: Micro-SD cards are required when databases are stored on the device. The database should be stored on the SD card.

856-065-005

Industrial-Grade Micro-SD Card

Micro-SD card, 2 GB, AF1GUDI, RoHS

Note: Micro-SD cards are required when databases are stored on the device. The database should be stored on the SD card.

856-065-006

Industrial-Grade Micro-SD Card

Micro-SD card, 4 GB, AF1GUDI, RoHS

Note: Micro-SD cards are required when databases are stored on the device. The database should be stored on the SD card.

856-065-007

Industrial-Grade Micro-SD Card

Micro-SD card, 8 GB, AF1GUDI, RoHS

Note: Micro-SD cards are required when databases are stored on the device. The database should be stored on the SD card.

AC LINE CORDS

50127245-001

Power Cord (India)

Power cord, India, 1.5 m (4.9 ft).

50117501-001

Power Cord (Australia)

Power cord, Australia, 2.5 m (8.2 ft).

50117503-001

Power Cord (CB)

Power cord, Argentina, Isled CB.

77900506E

Power Cord (U.S.)

Power cord, United States, IEC320-C13, 1.85 m (6.07 ft).

77900507E

Power Cord (UK)

Power cord, United Kingdom, IEC320-C13, 2.5 m (8.2 ft).

77900508E

Power Cord (EU)

Power cord, Europe, IEC320-C13, 2.5 m (8.2 ft).

19-19807

Power Cord (China)

Cable, China cord set (CCC), 2.5 m (8.2 ft).

19-19726

Power Cord (U.S.)

Cable, power cord/IEC, U.S., 2.5 m (8.2 ft).