





Summary	
EAN-13	
012345678900	
Grade (Pass=1.5)	Average
Average Bar Gain (tolerance)	3.6/06/660
Magnification	7% (±30)
Check Character	0.013" (10)
Structure	OK (0)
Left Margin	1.1
Right Margin	1.1
Aperture	1.1
Date & Time	29/08/2019 15:51:47
Reader Info	\$5093 (v0301) Resolution=75



**Kreski**

Zapraszamy do kontaktu!  
Więcej informacji: [www.kreski.pl](http://www.kreski.pl)



Verification   Scan	
539477297209128	
all Grade	OVERALL
Reflectance	FMMin
Contrast	FMMax
Modulation	Threshold
Defects	Reflectance Margin
Decodability	Symbol Contrast
Decode	Edge Contrast
	Modulation
	Defects
	Decodability



# 6000 series linear barcode verifier

**axicon**

THE BARCODE EXPERTS

# Features

Verification for point of sale linear barcodes

ISO/IEC (ANSI) compliant verification

GS1 specifications

USB powered

Lightweight and portable

Two year warranty

Results are immediately displayed on screen, and reports can be printed or e-mailed for remote diagnosis. Reports may be saved automatically to support ISO 9001 quality control procedures. Simple user-friendly calibration, and configuration of how results are displayed. This verifier is perfect for product manufacturers, label printers, printers and packagers, and pre-press studios. It is widely used by major retailers worldwide.



**Approved**



# Axicon 6015

## Point of sale barcode verifier

The Axicon 6015 series verifier is designed to verify linear barcodes (with a maximum width, including quiet zones, of 66mm) such as EAN and UPC barcodes used on products scanned at the retail point-of-sale.



# Axicon 6025-S

## High speed point of sale barcode verifier

The 'S' range of Axicon verifiers has a continuous scan feature, which means that obtaining at least ten different readings throughout the height of the barcode (as required by ISO/IEC) is much faster. Simply place the verifier slightly above or below the barcode, press the trigger and slide the verifier over the code – in less than a second you can have results of up to 100 scans of the code at different points in the bar height.



# Symbologies verified



Aperture reference

The software automatically identifies the symbology and its bar width (x-dimension) and adjusts the aperture size to comply with the symbology specifications and relevant ISO/IEC standard.

**Kreski**

Zapraszamy do kontaktu!  
Więcej informacji: [www.kreski.pl](http://www.kreski.pl)

# Free licence software

The verifier will analyse according to ISO/IEC 15416.

In addition the software can also check applications, such as:

GS1 General Specifications

Job reference

ISBN barcodes


Product lookup

Coupon codes

HIBC

Instore

And more....

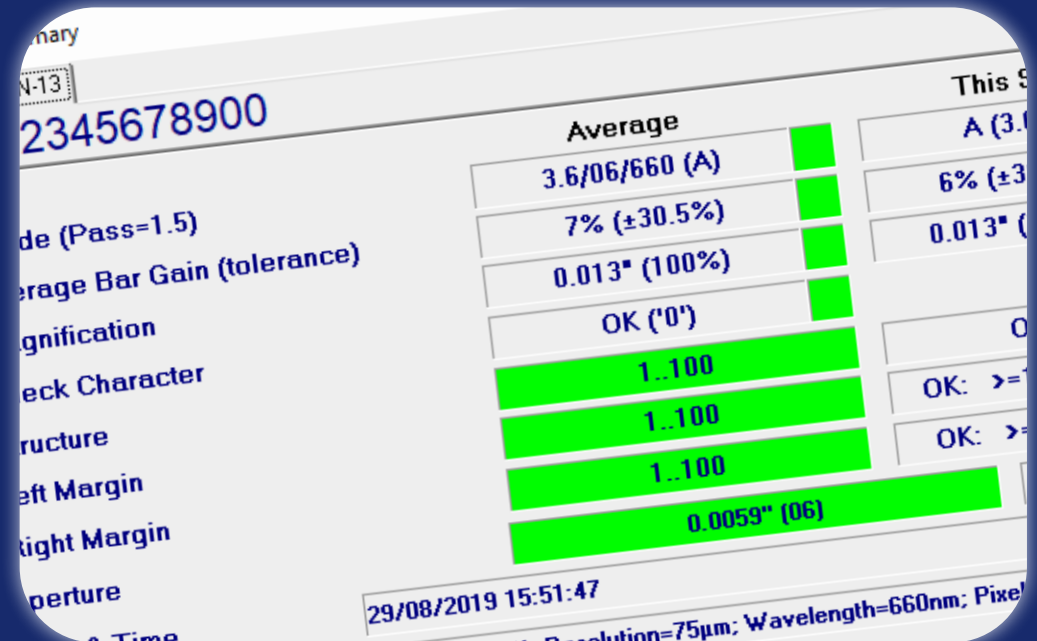




# Reporting / Saving

Verification reports can be saved in various formats including:

PDF  
HTML  
CSV  
TXT

Reports will include all ISO verification parameter grades in ISO/ANSI format.

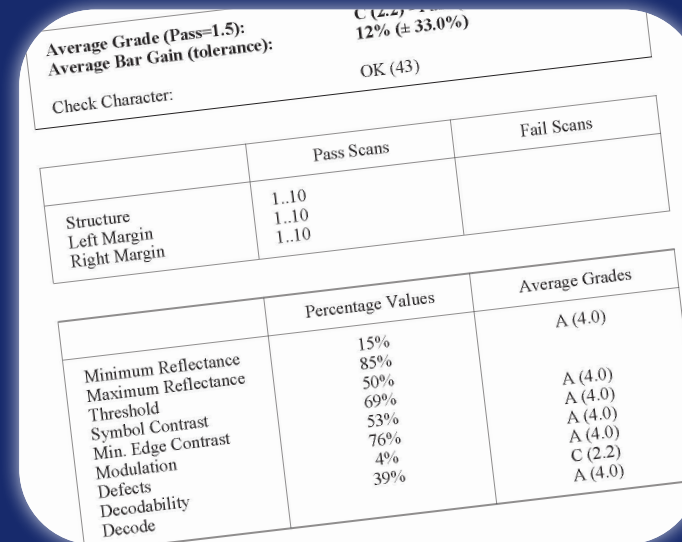

Average Grade (Pass=1.5):		C (2.2) = 1.5
Average Bar Gain (tolerance):		12% (± 33.0%)
Check Character:		OK (43)
	Pass Scans	Fail Scans
Structure	1..10	
Left Margin	1..10	
Right Margin	1..10	
	Percentage Values	Average Grades
Minimum Reflectance	15%	A (4.0)
Maximum Reflectance	85%	
Threshold	50%	A (4.0)
Symbol Contrast	69%	A (4.0)
Min. Edge Contrast	53%	A (4.0)
Modulation	76%	A (4.0)
Defects	4%	C (2.2)
Decodability	39%	A (4.0)
Decode		

21 CFR part 11



Auto saving of reports and user permission controls features enable 21 CFR part 11 compliance.

IQ / OQ / PQ



Installation, operational and performance qualification available. Comprises documentation, results forms and performance test cards.



Software languages available

English

French (Français)

Spanish (Español)

Dutch (Nederlands)

Chinese (中文)  
Simplified | Traditional

German (Deutsch)

Czech (Čeština)

Japanese (日本人)

Polish (Polski)

Italian (Italiano)

Korean (한국어)

Danish (Dansk)

Thailand (ไทย)

# Hardware specifications

Dimensions	190 x 95 x 70mm (7.5"x 7.5" x 2.8")
Weight	250g (8.82 oz)
Construction	ABS plastic, CCD sensor, LED illumination
Power consumption	Current draw 130mA at 5v – supplied from USB-2 host
Wavelength of light	660 nm (red)
Calibration	N.I.S.T. traceable calibration card with certificate included
Carry case	Supplied for transport and storage
Environmental	Operating temperature: 10° to 40°C - Storage temperature: -20° to 70°C Relative humidity: 25% to 80% @ 40°C non-condensing
Regulatory approvals	CE certified, RoHS compliant



**Kreski**

Zapraszamy do kontaktu!  
Więcej informacji: [www.kreski.pl](http://www.kreski.pl)

# Contact

Axicon Auto ID Limited

Village Farm

Church Road

Weston on the Green

Oxfordshire

OX25 3QP

UK



Tel: +44 (0)1869 351155

Email: [info@axicon.com](mailto:info@axicon.com)

Web: [www.axicon.com](http://www.axicon.com)

Global office locations available on our website



## Kreski

Zapraszamy do kontaktu!  
Więcej informacji: [www.kreski.pl](http://www.kreski.pl)