



# SonicWall TZ series (Gen 6)

Integrated threat prevention and SD-WAN platform for small/medium organizations and distributed enterprises

**Kreski**

Zapraszamy do kontaktu!  
Więcej informacji: [www.kreski.pl](http://www.kreski.pl)

The generation 6 (Gen 6) SonicWall TZ series enables small to mid-size organizations and distributed enterprises realize the benefits of an integrated security solution that checks all the boxes. Combining high-speed threat prevention and software-defined wide area networking (SD-WAN) technology with an extensive range of networking and wireless features plus simplified deployment and centralized management, the Gen 6 TZ series provides a unified security solution at a low total cost of ownership.



## BENEFITS

### Flexible, integrated security solution

- Secure SD-WAN
- Powerful SonicOS operating system
- High-speed 802.11ac wireless
- Power over Ethernet (PoE/PoE+)
- Network segmentation with VLANs

### Superior threat prevention and performance

- Patent-pending real-time deep memory inspection technology
- Patented reassembly-free deep packet inspection technology
- On-box and cloud-based threat prevention
- TLS/SSL decryption and inspection
- Industry-validated security effectiveness
- Dedicated Capture Labs threat research team
- Endpoint security with Capture Client

### Easy deployment, setup and ongoing management

- Zero-Touch Deployment
- Cloud-based and on-premises centralized management
- Scalable line of firewalls
- Low total cost of ownership

**Find the right SonicWall  
solution for your business:**  
[sonicwall.com/TZ](http://sonicwall.com/TZ)

## Flexible, integrated security solution

The foundation of the TZ series is SonicOS, SonicWall's feature-rich operating system. SonicOS includes a powerful set of capabilities that provides organizations with the flexibility to tune these Unified Threat Management (UTM) firewalls to their specific network requirements. For example, creating a secure high-speed wireless network is simplified through a built-in wireless controller and support for the IEEE 802.11ac standard or by adding our SonicWave 802.11ac Wave 2 access points. To reduce the cost and complexity of connecting high-speed wireless access points and other Power over Ethernet (PoE)-enabled devices such as IP cameras, phones and printers, the TZ300P and TZ600P provide PoE/PoE+ power.

Distributed retail businesses and campus environments can take advantage of the many tools in SonicOS to gain even greater benefits. Branch locations are able to exchange information securely with the central office using virtual private networking (VPN). Creating virtual LANs (VLANs) enables segmentation of the network into separate corporate and customer groups with rules that determine the level of communication with devices on other VLANs. SD-WAN offers a secure alternative to costly MPLS circuits while delivering consistent application performance and availability. Deploying TZ firewalls to remote locations is easy using Zero-Touch Deployment which enables provisioning of the firewall remotely through the cloud.

## Superior threat prevention and performance

Our vision for securing networks in today's continually-evolving cyber threat landscape is automated, real-time threat detection and prevention. Through a combination of cloud-based and on-box technologies we deliver protection to our firewalls that's been validated by independent third-party testing for its extremely high security effectiveness. Unknown threats are sent to SonicWall's cloud-based Capture Advanced Threat Protection (ATP) multi-engine sandbox for analysis.

Enhancing Capture ATP is our patent-pending Real-Time Deep Memory Inspection (RTDMI™) technology. The RTDMI engine detects and blocks malware and zero-day threats by inspecting directly in memory. In combination, our patented single-pass Reassembly-Free Deep Packet Inspection (RFDPI) engine examines every byte of every packet, inspecting both inbound and outbound traffic directly on the firewall. By leveraging Capture ATP with RTDMI technology in the SonicWall Capture Cloud Platform in addition to on-box capabilities including intrusion prevention, anti-malware and web/URL filtering, TZ series firewalls stop malware, ransomware and other threats at the gateway. For mobile devices used outside the firewall perimeter, SonicWall Capture Client provides an added layer of protection by applying advanced threat protection techniques such as machine learning and system rollback.

## RTDMI technology is precise, minimizes false positives, and identifies and mitigates sophisticated attacks where the malware's weaponry is exposed for less than 100 nanoseconds.

Capture Client also leverages the deep inspection of encrypted TLS traffic (DPI-SSL) on TZ series firewalls by installing and managing trusted TLS certificates.

The continued growth in the use of encryption to secure web sessions means it is imperative firewalls are able to scan encrypted traffic for threats. TZ series firewalls provide complete protection by performing full decryption and inspection of TLS/SSL and SSH encrypted connections regardless of port or protocol. The firewall searches for protocol non-compliance, threats, zero-days, intrusions, and even defined criteria by looking deep inside every packet. The deep packet inspection engine detects and prevents hidden attacks that leverage cryptography. It also blocks encrypted malware downloads, ceases the spread of infections and thwarts command and control (C&C) communications and data exfiltration. Inclusion and exclusion rules allow total control to customize which traffic is subjected to decryption and inspection based on specific organizational compliance and/or legal requirements.


## Easy deployment, setup and ongoing management

SonicWall makes it easy to configure and manage TZ series firewalls and SonicWave 802.11ac Wave 2 access points no matter where you deploy them. Centralized management, reporting, licensing and analytics are handled through our cloud-based Capture Security Center which offers the ultimate in visibility, agility and capacity to centrally govern the entire SonicWall security ecosystem from a single pane of glass.

A key component of the Capture Security Center is Zero-Touch Deployment. This cloud-based feature simplifies and speeds the deployment and provisioning of SonicWall firewalls at remote and branch office locations. The process requires minimal user intervention, and is fully automated to operationalize firewalls at scale in just a few steps. This significantly reduces the time, cost and complexity associated with installation and configuration, while security and connectivity occurs instantly and automatically. Together, the simplified deployment and setup along with the ease of management enable organizations to lower their total cost of ownership and realize a high return on investment.

## Integrated Security and Power for Your PoE-enabled Devices

Provide power to your PoE-enabled devices without the cost and complexity of a Power over Ethernet switch or injector. TZ300P and TZ600P firewalls integrate IEEE 802.3at technology to power PoE and PoE+ devices such as wireless access points, cameras, IP phones and more. The firewall scans all traffic coming from and going to each device using deep packet inspection technology and then removes harmful threats such as malware and intrusions, even over encrypted connections.

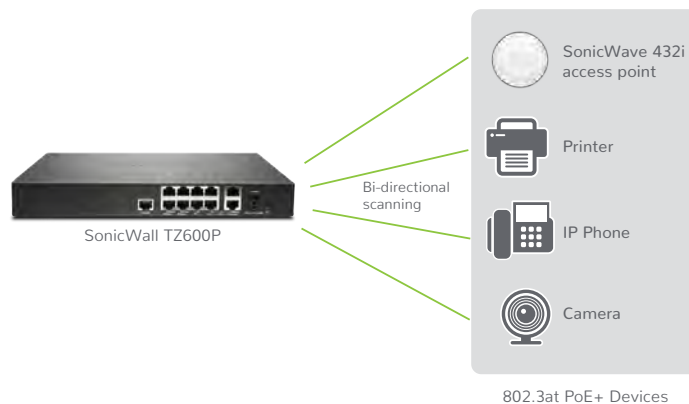


\* 802.11ac currently not available on SOHO/SOHO 250 models; SOHO/SOHO 250 models support 802.11a/b/g/n

## CAPTURE CLOUD PLATFORM

**SonicWall's Capture Cloud Platform** delivers cloud-based threat prevention and network management plus reporting and analytics for organizations of any size. The platform consolidates threat intelligence gathered from multiple sources including our award-winning multi-engine network sandboxing service, Capture Advanced Threat Protection, as well as more than 1 million SonicWall sensors located around the globe.

If data coming into the network is found to contain previously-unseen malicious code, SonicWall's dedicated, in-house Capture Labs threat research team develops signatures that are stored in the Capture Cloud Platform database and deployed to customer firewalls for up-to-date protection. New updates take effect immediately without reboots or interruptions. The signatures resident on the appliance protect against wide classes of attacks, covering tens of thousands of individual threats. In addition to the countermeasures on the appliance, TZ firewalls also have continuous access to the Capture Cloud Platform database which extends the onboard signature intelligence with tens of millions of signatures.


In addition to providing threat prevention, the Capture Cloud Platform offers single pane of glass management and administrators can easily create both real-time and historical reports on network activity.

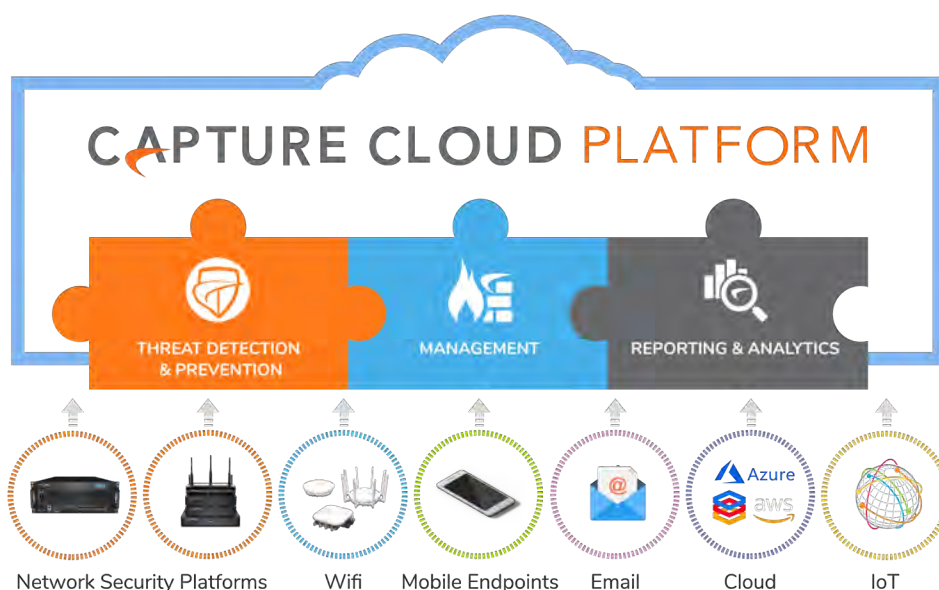

## ADVANCED THREAT PROTECTION

At the center of SonicWall's automated, real-time breach prevention is SonicWall Capture Advanced Threat Protection service, a cloud-based multi-engine sandbox that extends firewall threat protection to detect and prevent zero-day threats. Suspicious files are sent to the cloud where they are analyzed using deep learning algorithms with the option to hold them at the gateway until a verdict is determined. The multi-engine sandbox platform, which includes Real-Time Deep Memory Inspection, virtualized sandboxing, full system emulation and hypervisor level analysis technology, executes suspicious code and analyzes behavior. When a file is identified as malicious, it is blocked and a hash is immediately created within Capture ATP. Soon after, a signature is sent to firewalls to prevent follow-on attacks.

The service analyzes a broad range of operating systems and file types, including executable programs, DLL, PDFs, MS Office documents, archives, JAR and APK. For complete endpoint protection, the SonicWall Capture Client combines next-generation anti-virus technology with SonicWall's cloud-based multi-engine sandbox with optional integration with SonicWall firewalls.


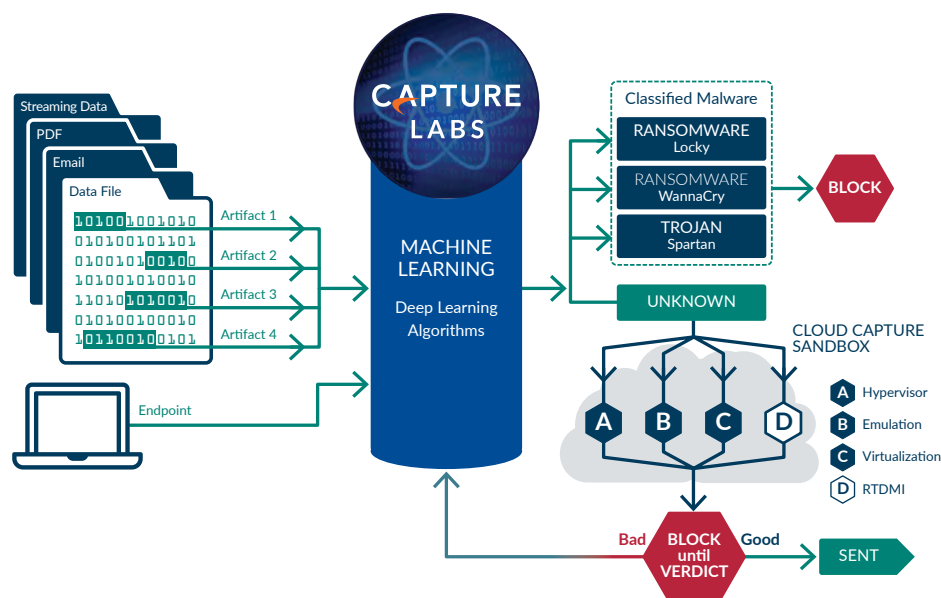


## REASSEMBLY- FREE DEEP PACKET INSPECTION ENGINE

The SonicWall Reassembly-Free Deep Packet Inspection (RFDPI) is a single-pass, low latency inspection system that performs stream-based, bi-directional traffic analysis at high speed without proxying or buffering to effectively uncover intrusion attempts and malware downloads while identifying application traffic regardless of port and protocol. This proprietary engine relies on streaming traffic payload inspection to detect threats at Layers 3-7, and takes network streams through extensive and repeated normalization and decryption in order to neutralize advanced evasion techniques that seek to confuse detection engines and sneak malicious code into the network.

Once a packet undergoes the necessary pre-processing, including TLS/SSL decryption, it is analyzed against a single, proprietary memory representation of three signature databases: intrusion attacks, malware and applications. The connection state is then advanced to represent the position of the stream relative to these databases until it encounters a state of attack, or other "match" event, at which point a pre-set action is taken.

In most cases, the connection is terminated and proper logging and notification events are created. However, the engine can also be configured for inspection only or, in case of application detection, to provide Layer 7 bandwidth management services for the remainder of the application stream as soon as the application is identified.

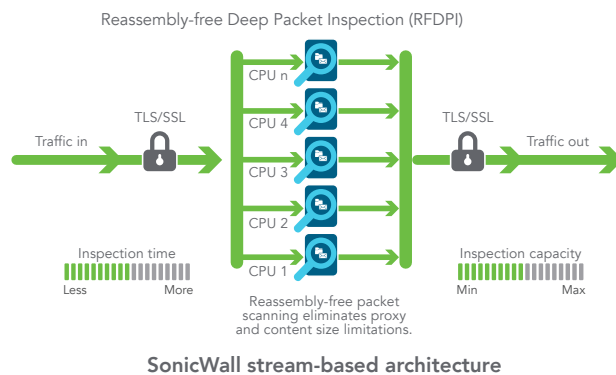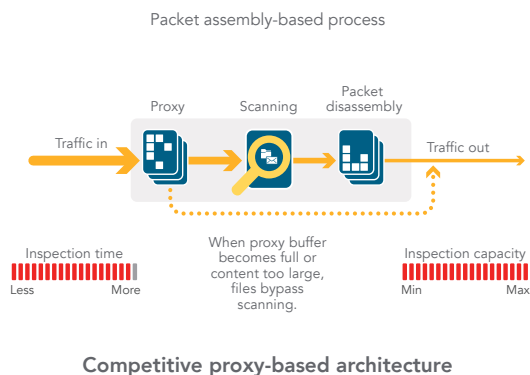

## CENTRALIZED MANAGEMENT AND REPORTING

For highly regulated organizations wanting to achieve a fully coordinated security governance, compliance and risk management strategy, SonicWall provides administrators a unified, secure and extensible platform to manage SonicWall firewalls, wireless access points and Dell N-Series and X-Series switches through a correlated and auditable workstream process. Enterprises can easily consolidate the management of security appliances, reduce administrative and troubleshooting complexities, and govern all operational aspects of the security infrastructure, including centralized policy management and enforcement; real-time event monitoring; user activities; application identifications; flow analytics and forensics; compliance and audit reporting; and more. In addition, enterprises meet the firewall's change management requirements through workflow automation which provides the agility and confidence to deploy the right firewall policies at the right time and in conformance with compliance regulations. Available on premises as SonicWall Global Management System and in the cloud as Capture Security Center, SonicWall management and reporting solutions provide a coherent way to manage network security by business processes and service levels, dramatically simplifying lifecycle management of your overall security environments compared to managing on a device-by-device basis.

For complete endpoint protection, the SonicWall Capture Client combines next-generation anti-virus technology with SonicWall's cloud-based multi-engine sandbox with optional integration with SonicWall firewalls.

## DISTRIBUTED NETWORKS

Because of their flexibility, TZ series firewalls are ideally suited for both distributed enterprise and single site deployments. In distributed networks like those found in retail organizations, each site has its own TZ firewall which connects to the Internet often through a local provider using a DSL, cable or 3G/4G connection. In addition to Internet access, each firewall utilizes an Ethernet connection to transport packets between remote sites and the central headquarters. Web services and SaaS applications such as Office 365, Salesforce and others are served up from the data center. Through mesh VPN technology, IT administrators can create a hub and spoke configuration for the safe transport of data between all locations.

The SD-WAN technology in SonicOS is a perfect complement to TZ firewalls deployed at remote and branch sites. Instead of relying on more expensive legacy technologies such as MPLS and T1, organizations using SD-WAN can choose lower-cost public Internet services while continuing to achieve a high level of application availability and predictable performance.





## SonicWall TZ600 series

For emerging enterprises, retail and branch offices looking for security, performance and options such as 802.3at PoE+ support at a value price, the SonicWall TZ600 secures networks with enterprise-class features and uncompromising performance.



TZ600P

PoE/PoE+ ports  
(4 PoE/PoE+)



Power LED  
Test LED  
USB port  
(3G/4G WAN failover)  
Link and activity indicator LEDs



Expansion module  
Console port  
X0 LAN port  
X1 WAN port  
8x1-GbE switch (configurable)  
12V DC 2A power

## SonicWall TZ500 series

For growing branch offices and SMBs, the SonicWall TZ500 series delivers highly effective, no-compromise protection with network productivity and optional integrated 802.11ac dual-band wireless.




Power LED  
Test LED  
USB port  
(3G/4G WAN failover)  
Link and activity indicator LEDs



Optional 802.11ac wireless  
Console port  
6x1-GbE switch (configurable)  
X0 LAN port  
X1 WAN port  
12V DC 2A power


## SonicWall TZ400 series

For small business, retail and branch office locations, the SonicWall TZ400 series delivers enterprise-grade protection. Flexible wireless deployment is available with optional 802.11ac dual-band wireless integrated into the firewall.

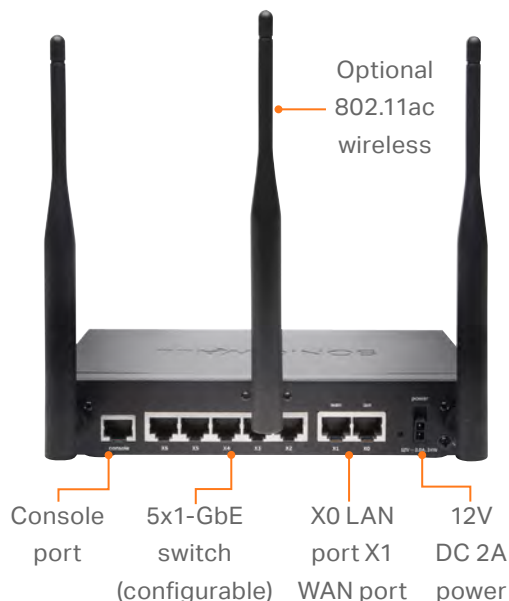

## SonicWall TZ350/TZ300 series


The SonicWall TZ300 and TZ350 series offer an all-in-one solution that protects networks from advanced attacks. Unlike consumer grade products, these UTM firewalls combine high-speed intrusion prevention, anti-malware and content/URL filtering plus broad secure mobile access support for laptops, smartphones and tablets along with optional integrated 802.11ac wireless. In addition, the TZ300 offers optional 802.3at PoE+ to power PoE-enabled devices.

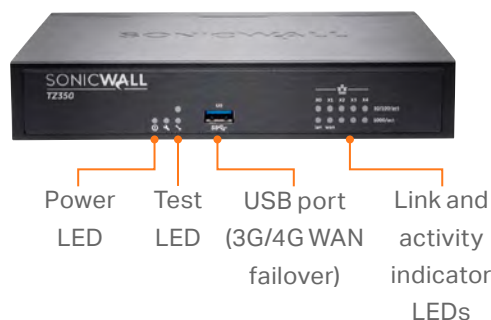



## SonicWall SOHO 250/SOHO series

For wired and wireless small and home office environments, the SonicWall SOHO 250 and SOHO series deliver the same business-class protection large organizations require at a more affordable price point. Add optional 802.11n wireless to provide employees, customers and guests with secure wireless connectivity.

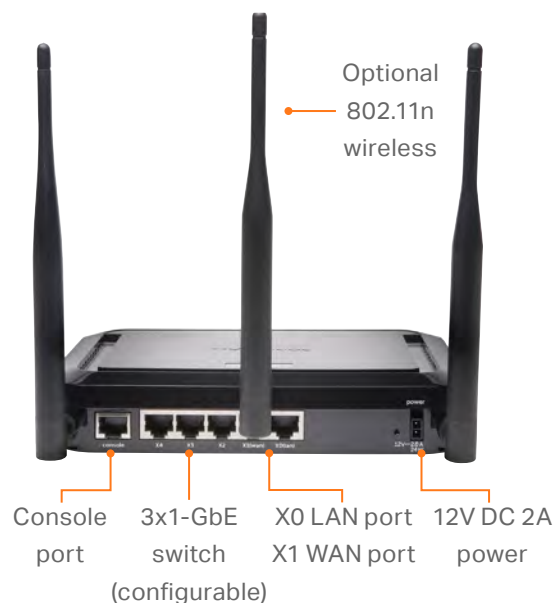

Zapraszamy do kontaktu!  
Więcej informacji: [www.kreski.pl](http://www.kreski.pl)

### PARTNER ENABLED SERVICES

Need help to plan, deploy or optimize your SonicWall solution? SonicWall Advanced Services Partners are trained to provide you with world class professional services. Learn more at:

[www.sonicwall.com/PES](http://www.sonicwall.com/PES)



## SonicOS feature summary

### Firewall

- Stateful packet inspection
- Reassembly-Free Deep Packet Inspection
- DDoS attack protection (UDP/ICMP/SYN flood)
- IPv4/IPv6 support
- Biometric authentication for remote access
- DNS proxy
- REST APIs

### SSL/SSH decryption and inspection<sup>1</sup>

- Deep packet inspection for TLS/SSL/SSH
- Inclusion/exclusion of objects, groups or hostnames
- TLS/SSL control
- Granular DPI SSL controls per zone or rule

### Capture advanced threat protection<sup>1</sup>

- Real-Time Deep Memory Inspection
- Cloud-based multi-engine analysis
- Virtualized sandboxing
- Hypervisor level analysis
- Full system emulation
- Broad file type examination
- Automated and manual submission
- Real-time threat intelligence updates
- Block until verdict
- Capture Client

### Intrusion prevention<sup>1</sup>

- Signature-based scanning
- Automatic signature updates
- Bidirectional inspection
- Granular IPS rule capability
- GeoIP/Botnet filtering<sup>2</sup>
- Regular expression matching

### Anti-malware<sup>1</sup>

- Stream-based malware scanning
- Gateway anti-virus
- Gateway anti-spyware
- Bi-directional inspection

- No file size limitation
- Cloud malware database

### Application identification<sup>1</sup>

- Application control
- Application bandwidth management
- Custom application signature creation
- Data leakage prevention
- Application reporting over NetFlow/IPFIX
- Comprehensive application signature database

### Traffic visualization and analytics

- User activity
- Application/bandwidth/threat usage
- Cloud-based analytics

### HTTP/HTTPS Web content filtering<sup>1</sup>

- URL filtering
- Anti-proxy technology
- Keyword blocking
- Policy-based filtering (exclusion/inclusion)
- HTTP header insertion
- Bandwidth manage CFS rating categories
- Unified policy model with app control
- Content Filtering Client

### VPN

- Auto-provision VPN
- IPsec VPN for site-to-site connectivity
- SSL VPN and IPsec client remote access
- Redundant VPN gateway
- Mobile Connect for iOS, Mac OS X, Windows, Chrome, Android and Kindle Fire
- Route-based VPN (OSPF, RIP, BGP)

### Networking

- Secure SD-WAN
- PortShield
- Enhanced logging
- Layer-2 QoS
- Port security

- Dynamic routing (RIP/OSPF/BGP)
- SonicWall wireless controller
- Policy-based routing (ToS/metric and ECMP)
- Asymmetric routing
- DHCP server
- NAT
- Bandwidth management
- High availability - Active/Standby with state sync<sup>2</sup>
- Inbound/outbound load balancing
- L2 bridge mode, NAT mode
- 3G/4G WAN failover
- Common Access Card (CAC) support

### VoIP

- Granular QoS control
- Bandwidth management
- DPI for VoIP traffic
- H.323 gatekeeper and SIP proxy support

### Management and monitoring

- Web GUI
- Command line interface (CLI)
- SNMPv2/v3
- Centralized management and reporting with SonicWall GMS and Capture Security Center
- Logging
- Netflow/IPFix exporting
- Cloud-based configuration backup
- Application and bandwidth visualization
- IPv4 and IPv6 management
- Dell N-Series and X-Series switch management including cascaded switches<sup>2</sup>

### Integrated Wireless

- Dual-band (2.4 GHz and 5.0 GHz)
- 802.11 a/b/g/n/ac wireless standards<sup>2</sup>
- WIDS/WIPS
- Wireless guest services
- Lightweight hotspot messaging
- Virtual access point segmentation
- Captive portal
- Cloud ACL

<sup>1</sup>Requires added subscription

<sup>2</sup>State sync high availability only on SonicWall TZ500 and SonicWall TZ600 models

## SonicWall TZ series system specifications

Firewall General	SOHO Series	SOHO 250 Series	TZ300 Series	TZ350 Series
Operating system	SonicOS			
Interfaces	5x1GbE, 1 USB, 1 Console		5x1GbE, 1 USB, 1 Console	5x1GbE, 1 USB, 1 Console
Power over Ethernet (PoE) support	—	—	TZ300P - 2 ports (2 PoE or 1 PoE+)	—
Expansion	USB			
Management	CLI, SSH, Web UI, Capture Security Center, GMS, REST APIs			
Single Sign-On (SSO) Users	250	350	500	500
VLAN interfaces	25			
Access points supported (maximum)	2	4	8	8

Firewall/VPN Performace	SOHO Series	SOHO 250 Series	TZ300 Series	TZ350 Series
Firewall inspection throughput <sup>1</sup>	300 Mbps	600 Mbps	750 Mbps	1.0 Gbps
Threat Prevention throughput <sup>2</sup>	150 Mbps	200 Mbps	235 Mbps	335 Mbps
Application inspection throughput <sup>2</sup>	—	275 Mbps	375 Mbps	600 Mbps
IPS throughput <sup>2</sup>	200 Mbps	250 Mbps	300 Mbps	400 Mbps
Anti-malware inspection throughput <sup>2</sup>	150 Mbps	200 Mbps	235 Mbps	335 Mbps
TLS/SSL inspection and decryption throughput (DPI SSL) <sup>2</sup>	30 Mbps	50 Mbps	60 Mbps	65 Mbps
IPSec VPN throughput <sup>3</sup>	150 Mbps	200 Mbps	300 Mbps	430 Mbps
Connections per second	1,800	3,000	5,000	6,000
Maximum connections (SPI)	10,000	50,000	100,000	100,000
Maximum connections (DPI)	10,000	50,000	90,000	90,000
Maximum connections (DPI SSL)	250	25,000	25,000	25,000

VPN	SOHO Series	SOHO 250 Series	TZ300 Series	TZ350 Series
Site-to-site VPN tunnels	10	10	10	15
IPSec VPN clients (maximum)	1 (5)	1 (5)	1 (10)	2 (10)
SSL VPN licenses (maximum)	1 (10)	1 (25)	1 (50)	1 (75)
Encryption/authentication	DES, 3DES, AES (128, 192, 256-bit), MD5, SHA-1, Suite B Cryptography			
Key exchange	Diffie Hellman Groups 1, 2, 5, 14v			
Route-based VPN	RIP, OSPF, BGP <sup>4</sup>			
Certificate support	Verisign, Thawte, Cybertrust, RSA Keon, Entrust and Microsoft CA for SonicWall-to-SonicWall VPN, SCEP			
VPN features	Dead Peer Detection, DHCP Over VPN, IPSec NAT Traversal, Redundant VPN Gateway, Route-based VPN			
Global VPN client platforms supported	Microsoft® Windows Vista 32/64-bit, Windows 7 32/64-bit, Windows 8.0 32/64-bit, Windows 8.1 32/64-bit, Windows 10			
NetExtender	Microsoft Windows Vista 32/64-bit, Windows 7, Windows 8.0 32/64-bit, Windows 8.1 32/64-bit, Mac OS X 10.4+, Linux FC3+/Ubuntu 7+/OpenSUSE			
Mobile Connect	Apple® iOS, Mac OS X, Google® Android™, Kindle Fire, Chrome, Windows 8.1 (Embedded)			

## SonicWall TZ series system specifications continued

Security Services	SOHO Series	SOHO 250 Series	TZ300 Series	TZ350 Series
Deep Packet Inspection services	Gateway Anti-Virus, Anti-Spyware, Intrusion Prevention, DPI SSL			
Content Filtering Service (CFS)	HTTP URL, HTTPS IP, keyword and content scanning, Comprehensive filtering based on file types such as ActiveX, Java, Cookies for privacy, allow/forbid lists			
Comprehensive Anti-Spam Service	Supported			
Application Visualization	No	Yes	Yes	Yes
Application Control	Yes	Yes	Yes	Yes
Capture Advanced Threat Protection	No	Yes	Yes	Yes

Networking	SOHO Series	SOHO 250 Series	TZ300 Series	TZ350 Series
IP address assignment	Static, (DHCP, PPPoE, L2TP and PPTP client), Internal DHCP server, DHCP relay			
NAT modes	1:1, 1:many, many:1, many:many, flexible NAT (overlapping IPs), PAT, transparent mode			
Routing protocols <sup>4</sup>	BGP <sup>4</sup> , OSPF, RIPv1/v2, static routes, policy-based routing			
QoS	Bandwidth priority, max bandwidth, guaranteed bandwidth, DSCP marking, 802.1e (WMM)			
Authentication	LDAP (multiple domains), XAUTH/RADIUS, SSO, Novell, internal user database		LDAP (multiple domains), XAUTH/RADIUS, SSO, Novell, internal user database, Terminal Services, Citrix, Common Access Card (CAC)	
Local user database			150	
VoIP	Full H.323v1-5, SIP			
Standards	TCP/IP, UDP, ICMP, HTTP, HTTPS, IPSec, ISAKMP/IKE, SNMP, DHCP, PPPoE, L2TP, PPTP, RADIUS, IEEE 802.3			
Certifications	ICSA Firewall, ICSA Anti-Virus, FIPS 140-2, Common Criteria NDPP (Firewall and IPS), USGv6, CSfC, DoDIN (formally UC-APL): DWF, IPS/IDS.			
Common Access Card (CAC)	Supported			
High availability	No		Active/standby	

Hardware	SOHO Series	SOHO 250 Series	TZ300 Series	TZ350 Series
Form factor	Desktop			
Power supply	24W external		24W external 65W external (TZ300P only)	24W external
Maximum power consumption (W)	6.4 / 11.3	6.9 / 11.3	6.9 / 12.0	6.9 / 12.0
Input power	100 to 240 VAC, 50-60 Hz, 1 A			
Total heat dissipation	21.8 / 38.7 BTU	23.5 / 38.7 BTU	23.5 / 40.9 BTU	23.5 / 40.9 BTU
Dimensions	3.6 x 14.1 x 19 cm 1.42 x 5.55 x 7.48 in		3.5 x 13.4 x 19 cm 1.38 x 5.28 x 7.48 in	3.5 x 13.4 x 19 cm 1.38 x 5.28 x 7.48 in
Weight	0.34 kg / 0.75 lbs 0.48 kg / 1.06 lbs		0.73 kg / 1.61 lbs 0.84 kg / 1.85 lbs	0.73 kg / 1.61 lbs 0.84 kg / 1.85 lbs
WEEE weight	0.80 kg / 1.76 lbs 0.94 kg / 2.07 lbs		1.15 kg / 2.53 lbs 1.26 kg / 2.78 lbs	1.15 kg / 2.53 lbs 1.26 kg / 2.78 lbs
Shipping weight	1.20 kg / 2.64 lbs 1.34 kg / 2.95 lbs		1.37 kg / 3.02 lbs 1.48 kg / 3.26 lbs	1.37 kg / 3.02 lbs 1.48 kg / 3.26 lbs
MTBF (in years)	58.9/56.1 (wireless)	56.1	56.1	56.1
Environment (Operating/Storage)	32°-105° F (0°-40° C)/-40° to 158° F (-40° to 70° C)			
Humidity	5-95% non-condensing			

## SonicWall TZ series system specifications continued

Regulatory	SOHO Series	SOHO 250 Series	TZ300 Series	TZ350 Series
Major regulatory compliance (wired models)	FCC Class B, ICES Class B, CE (EMC, LVD, RoHS), C-Tick, VCCI Class B, UL, cUL, TUV/GS, CB, Mexico CoC by UL, WEEE, REACH, KCC/MSIP, ANATEL		FCC Class B, ICES Class B, CE (EMC, LVD, RoHS), C-Tick, VCCI Class B, UL, cUL, TUV/GS, CB, Mexico CoC by UL, WEEE, REACH, KCC/MSIP, ANATEL	
Major regulatory compliance (wireless models)	FCC Class B, FCC RF ICES Class B, IC RF CE (RED, RoHS), RCM, VCCI Class B, MIC/TELEC, UL, cUL, TUV/GS, CB, Mexico CoC by UL, WEEE, REACH		FCC Class B, FCC RF ICES Class B, IC RF CE (RED, RoHS), RCM, VCCI Class B, MIC/TELEC, UL, cUL, TUV/GS, CB, Mexico CoC by UL, WEEE, REACH	
Integrated Wireless	SOHO Series	SOHO 250 Series	TZ300 Series	TZ350 Series
Standards	802.11 a/b/g/n		802.11a/b/g/n/ac (WEP, WPA, WPA2, 802.11i, TKIP, PSK, 02.1x, EAP-PEAP, EAP-TTLS)	
Frequency bands <sup>5</sup>	802.11a: 5.180-5.825 GHz; 802.11b/g: 2.412-2.472 GHz; 802.11n: 2.412-2.472 GHz, 5.180-5.825 GHz		802.11a: 5.180-5.825 GHz; 802.11b/g: 2.412-2.472 GHz; 802.11n: 2.412-2.472 GHz, 5.180-5.825 GHz; 802.11ac: 2.412-2.472 GHz, 5.180-5.825 GHz	
Operating Channels	802.11a: US and Canada 12, Europe 11, Japan 4, Singapore 4, Taiwan 4; 802.11b/g: US and Canada 1-11, Europe 1-13, Japan 1-14 (14-802.11b only); 802.11n (2.4 GHz): US and Canada 1-11, Europe 1-13, Japan 1-13; 802.11n (5 GHz): US and Canada 36-48/149-165, Europe 36-48, Japan 36-48, Spain 36-48/52-64;		802.11a: US and Canada 12, Europe 11, Japan 4, Singapore 4, Taiwan 4; 802.11b/g: US and Canada 1-11, Europe 1-13, Japan 1-14 (14-802.11b only); 802.11n (2.4 GHz): US and Canada 1-11, Europe 1-13, Japan 1-13; 802.11n (5 GHz): US and Canada 36-48/149-165, Europe 36-48, Japan 36-48, Spain 36-48/52-64; 802.11ac: US and Canada 36-48/149-165, Europe 36-48, Japan 36-48, Spain 36-48/52-64	
Transmit output power	Based on the regulatory domain specified by the system administrator			
Transmit power control	Supported			
Data rates supported	802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps per channel; 802.11b: 1, 2, 5.5, 11 Mbps per channel; 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps per channel; 802.11n: 7.2, 14.4, 21.7, 28.9, 43.3, 57.8, 65, 72.2, 15, 30, 45, 60, 90, 120, 135, 150 Mbps per channel		802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps per channel; 802.11b: 1, 2, 5.5, 11 Mbps per channel; 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps per channel; 802.11n: 7.2, 14.4, 21.7, 28.9, 43.3, 57.8, 65, 72.2, 15, 30, 45, 60, 90, 120, 135, 150 Mbps per channel; 802.11ac: 7.2, 14.4, 21.7, 28.9, 43.3, 57.8, 65, 72.2, 86.7, 96.3, 15, 30, 45, 60, 90, 120, 135, 150, 180, 200, 32.5, 65, 97.5, 130, 195, 260, 292.5, 325, 390, 433.3, 65, 130, 195, 260, 390, 520, 585, 650, 780, 866.7 Mbps per channel	
Modulation technology spectrum	802.11a: Orthogonal Frequency Division Multiplexing (OFDM); 802.11b: Direct Sequence Spread Spectrum (DSSS); 802.11g: Orthogonal Frequency Division Multiplexing (OFDM)/Direct Sequence Spread Spectrum (DSSS); 802.11n: Orthogonal Frequency Division Multiplexing (OFDM)		802.11a: Orthogonal Frequency Division Multiplexing (OFDM); 802.11b: Direct Sequence Spread Spectrum (DSSS); 802.11g: Orthogonal Frequency Division Multiplexing (OFDM)/Direct Sequence Spread Spectrum (DSSS); 802.11n: Orthogonal Frequency Division Multiplexing (OFDM); 802.11ac: Orthogonal Frequency Division Multiplexing (OFDM)	

\*Future use

<sup>1</sup>Testing Methodologies: Maximum performance based on RFC 2544 (for firewall). Actual performance may vary depending on network conditions and activated services.

<sup>2</sup>Threat Prevention/GatewayAV/Anti-Spyware/IPS throughput measured using industry standard Spirent WebAvalanche HTTP performance test and Ixia test tools. Testing done with multiple flows through multiple port pairs. Threat Prevention throughput measured with Gateway AV, Anti-Spyware, IPS and Application Control enabled. DPI SSL performance measured on HTTPS traffic with IPS enabled.

<sup>3</sup>VPN throughput measured using UDP traffic at 1280 byte packet size adhering to RFC 2544. All specifications, features and availability are subject to change.

<sup>4</sup>BGP is available only on SonicWall TZ350, TZ400, TZ500 and TZ600.

<sup>5</sup>All TZ integrated wireless models can support either 2.4GHz or 5GHz band. For dual-band support, please use SonicWall's wireless access point products.



Zapraszamy do kontaktu!  
Więcej informacji: [www.kreski.pl](http://www.kreski.pl)

## SonicWall TZ series system specifications continued

Firewall General	TZ400 Series	TZ500 Series	TZ600 Series
Operating system	SonicOS		
Interfaces	7x1GbE, 1 USB, 1 Console	8x1GbE, 2 USB, 1 Console	10x1GbE, 2 USB, 1 Console, 1 Expansion Slot
Power over Ethernet (PoE) support	—	—	TZ600P - 4 ports (4 PoE or 4 PoE+)
Expansion	USB	2 USB	Expansion Slot (Rear)*, 2 USB
Management	CLI, SSH, Web UI, Capture Security Center, GMS, REST APIs		
Single Sign-On (SSO) Users	500	500	500
VLAN interfaces	50	50	50
Access points supported (maximum)	16	16	24

Firewall/VPN Performance	TZ400 Series	TZ500 Series	TZ600 Series
Firewall inspection throughput <sup>1</sup>	1.3 Gbps	1.4 Gbps	1.9 Gbps
Threat Prevention throughput <sup>2</sup>	600 Mbps	700 Mbps	800 Mbps
Application inspection throughput <sup>2</sup>	1.2 Gbps	1.3 Gbps	1.8 Gbps
IPS throughput <sup>2</sup>	900 Mbps	1.0 Gbps	1.2 Gbps
Anti-malware inspection throughput <sup>2</sup>	600 Mbps	700 Mbps	800 Mbps
TLS/SSL inspection and decryption throughput (DPI SSL) <sup>2</sup>	180 Mbps	225 Mbps	300 Mbps
IPSec VPN throughput <sup>3</sup>	900 Mbps	1.0 Gbps	1.1 Gbps
Connections per second	6,000	8,000	12,000
Maximum connections (SPI)	150,000	150,000	150,000
Maximum connections (DPI)	125,000	125,000	125,000
Maximum connections (DPI SSL)	25,000	25,000	25,000

VPN	TZ400 Series	TZ500 Series	TZ600 Series
Site-to-site VPN tunnels	20	25	50
IPSec VPN clients (maximum)	2 (25)	2 (25)	2 (25)
SSL VPN licenses (maximum)	2 (100)	2 (150)	2 (200)
Encryption/authentication	DES, 3DES, AES (128, 192, 256-bit)/MD5, SHA-1, Suite B Cryptography		
Key exchange	Diffie Hellman Groups 1, 2, 5, 14v		
Route-based VPN	RIP, OSPF, BGP		
Certificate support	Verisign, Thawte, Cybertrust, RSA Keon, Entrust and Microsoft CA for SonicWall-to- SonicWall VPN, SCEP		
VPN features	Dead Peer Detection, DHCP Over VPN, IPSec NAT Traversal, Redundant VPN Gateway, Route-based VPN		
Global VPN client platforms supported	Microsoft® Windows Vista 32/64-bit, Windows 7 32/64-bit, Windows 8.0 32/64-bit, Windows 8.1 32/64-bit, Windows 10		
NetExtender	Microsoft Windows Vista 32/64-bit, Windows 7, Windows 8.0 32/64-bit, Windows 8.1 32/64-bit, Mac OS X 10.4+, Linux FC3+/Ubuntu 7+/OpenSUSE		
Mobile Connect	Apple® iOS, Mac OS X, Google® Android™, Kindle Fire, Chrome, Windows 8.1 (Embedded)		



## SonicWall TZ series system specifications continued

Security Services	TZ400 Series	TZ500 Series	TZ600 Series
Deep Packet Inspection services	Gateway Anti-Virus, Anti-Spyware, Intrusion Prevention, DPI SSL		
Content Filtering Service (CFS)	HTTP URL, HTTPS IP, keyword and content scanning, Comprehensive filtering based on file types such as ActiveX, Java, Cookies for privacy, allow/forbid lists		
Comprehensive Anti-Spam Service	Supported		
Application Visualization	Yes	Yes	Yes
Application Control	Yes	Yes	Yes
Capture Advanced Threat Protection	Yes	Yes	Yes

Networking	TZ400 Series	TZ500 Series	TZ600 Series
IP address assignment	Static, (DHCP, PPPoE, L2TP and PPTP client), Internal DHCP server, DHCP relay		
NAT modes	1:1, 1:many, many:1, many:many, flexible NAT (overlapping IPs), PAT, transparent mode		
Routing protocols <sup>4</sup>	BGP <sup>4</sup> , OSPF, RIPv1/v2, static routes, policy-based routing		
QoS	Bandwidth priority, max bandwidth, guaranteed bandwidth, DSCP marking, 802.1e (WMM)		
Authentication	LDAP (multiple domains), XAUTH/RADIUS, SSO, Novell, internal user database, Terminal Services, Citrix, Common Access Card (CAC)		
Local user database	150	250	
VoIP	Full H.323v1-5, SIP		
Standards	TCP/IP, UDP, ICMP, HTTP, HTTPS, IPSec, ISAKMP/IKE, SNMP, DHCP, PPPoE, L2TP, PPTP, RADIUS, IEEE 802.3		
Certifications	FIPS 140-2 (with Suite B) Level 2, UC APL, IPv6 (Phase 2), ICSA Network Firewall, ICSA Anti-virus		
Common Access Card (CAC)	Supported		
High availability	Active/standby	Active/Standby with stateful synchronization	

Hardware	TZ400 Series	TZ500 Series	TZ600 Series
Form factor	Desktop		
Power supply	24W external	36W external	60W external 180W external (TZ600P only)
Maximum power consumption (W)	9.2 / 13.8	13.4 / 17.7	16.1
Input power	100-240 VAC, 50-60 Hz, 1 A		
Total heat dissipation	31.3 / 47.1 BTU	45.9 / 60.5 BTU	55.1 BTU
Dimensions	3.5 x 13.4 x 19 cm 1.38 x 5.28 x 7.48 in	3.5 x 15 x 22.5 cm 1.38 x 5.91 x 8.86 in	3.5 x 18 x 28 cm 1.38 x 7.09 x 11.02 in
Weight	0.73 kg / 1.61 lbs 0.84 kg / 1.85 lbs	0.92 kg / 2.03 lbs 1.05 kg / 2.31 lbs	1.47 kg / 3.24 lbs
WEEE weight	1.15 kg / 2.53 lbs 1.26 kg / 2.78 lbs	1.34 kg / 2.95 lbs 1.48 kg / 3.26 lbs	1.89 kg / 4.16 lbs
Shipping weight	1.37 kg / 3.02 lbs 1.48 kg / 3.26 lbs	1.93 kg / 4.25 lbs 2.07 kg / 4.56 lbs	2.48 kg / 5.47 lbs
MTBF (in years)	54.0	40.8	18.4
Environment (Operating/Storage)	32°-105° F (0°-40° C)/-40° to 158° F (-40° to 70° C)		
Humidity	5-95% non-condensing		

## SonicWall TZ series system specifications continued

Regulatory	TZ400 Series	TZ500 Series	TZ600 Series
Major regulatory compliance (wired models)	FCC Class B, ICES Class B, CE (EMC, LVD, RoHS), C-Tick, VCCI Class B, UL, cUL, TUV/GS, CB, Mexico CoC by UL, WEEE, REACH, KCC/MSIP, ANATEL	FCC Class B, ICES Class B, CE (EMC, LVD, RoHS), C-Tick, VCCI Class B, UL, cUL, TUV/GS, CB, Mexico CoC by UL, WEEE, REACH, BSMI, KCC/MSIP, ANATEL	FCC Class A, ICES Class A, CE (EMC, LVD, RoHS), C-Tick, VCCI Class A, UL cUL, TUV/GS, CB, Mexico CoC by UL, WEEE, REACH, KCC/MSIP, ANATEL
Major regulatory compliance (wireless models)	FCC Class B, FCC RF ICES Class B, IC RF CE (RED, RoHS), RCM, VCCI Class B, MIC/TELEC, UL, cUL, TUV/GS, CB, Mexico CoC by UL, WEEE, REACH	FCC Class B, FCC RF ICES Class B, IC RF CE (RED, RoHS), RCM, VCCI Class B, MIC/TELEC, UL, cUL, TUV/GS, CB, Mexico CoC by UL, WEEE, REACH	—
Integrated Wireless	TZ400 Series	TZ500 Series	TZ600 Series
Standards	802.11a/b/g/n/ac (WEP, WPA, WPA2, 802.11i, TKIP, PSK, 02.1x, EAP-PEAP, EAP-TTLS)		—
Frequency bands <sup>5</sup>	802.11a: 5.180-5.825 GHz; 802.11b/g: 2.412-2.472 GHz; 802.11n: 2.412-2.472 GHz, 5.180-5.825 GHz; 802.11ac: 2.412-2.472 GHz, 5.180-5.825 GHz		—
Operating Channels	802.11a: US and Canada 12, Europe 11, Japan 4, Singapore 4, Taiwan 4; 802.11b/g: US and Canada 1-11, Europe 1-13, Japan 1-14 (14-802.11b only); 802.11n (2.4 GHz): US and Canada 1-11, Europe 1-13, Japan 1-13; 802.11n (5 GHz): US and Canada 36-48/149-165, Europe 36-48, Japan 36-48, Spain 36-48/52-64; 802.11ac: US and Canada 36-48/149-165, Europe 36-48, Japan 36-48, Spain 36-48/52-64		—
Transmit output power	Based on the regulatory domain specified by the system administrator		—
Transmit power control	Supported		—
Data rates supported	802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps per channel; 802.11b: 1, 2, 5.5, 11 Mbps per channel; 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps per channel; 802.11n: 7.2, 14.4, 21.7, 28.9, 43.3, 57.8, 65, 72.2, 15, 30, 45, 60, 90, 120, 135, 150 Mbps per channel; 802.11ac: 7.2, 14.4, 21.7, 28.9, 43.3, 57.8, 65, 72.2, 86.7, 96.3, 15, 30, 45, 60, 90, 120, 135, 150, 180, 200, 32.5, 65, 97.5, 130, 195, 260, 292.5, 325, 390, 433.3, 65, 130, 195, 260, 390, 520, 585, 650, 780, 866.7 Mbps per channel		—
Modulation technology spectrum	802.11a: Orthogonal Frequency Division Multiplexing (OFDM); 802.11b: Direct Sequence Spread Spectrum (DSSS); 802.11g: Orthogonal Frequency Division Multiplexing (OFDM)/Direct Sequence Spread Spectrum (DSSS); 802.11n: Orthogonal Frequency Division Multiplexing (OFDM); 802.11ac: Orthogonal Frequency Division Multiplexing (OFDM)		—

### Regulatory model numbers:

SOHO/SOHO Wireless - APL31-0B9/APL41-0BA  
 SOHO 250/SOHO 250 Wireless - APL41-0D6/APL41-0BA  
 TZ300/TZ300 Wireless/TZ300P - APL28-0B4/APL28-0B5/APL47-0D2  
 TZ350/TZ350 Wireless - APL28-0B4/APL28-0B5  
 TZ400/TZ400 Wireless - APL28-0B4/APL28-0B5  
 TZ500/TZ500 Wireless - APL29-0B6/APL29-0B7  
 TZ600/TZ600P - APL30-0B8/APL48-0D3



The Gartner Peer Insights Customers' Choice logo is a trademark and service mark of Gartner, Inc., and/or its affiliates, and is used herein with permission. All rights reserved. Gartner Peer Insights Customers' Choice distinctions are determined by the subjective opinions of individual end-user customers based on their own experiences, the number of published reviews on Gartner Peer Insights and overall ratings for a given vendor in the market, as further described here, and are not intended in any way to represent the views of Gartner or its affiliates.



## Learn more about SonicWall TZ Series

[www.sonicwall.com/TZ](http://www.sonicwall.com/TZ)

### About SonicWall

SonicWall delivers Boundless Cybersecurity for the hyper-distributed era and a work reality where everyone is remote, mobile and unsecure. By knowing the unknown, providing real-time visibility and enabling breakthrough economics, SonicWall closes the cybersecurity business gap for enterprises, governments and SMBs worldwide. For more information, visit [www.sonicwall.com](http://www.sonicwall.com) or follow us on [Twitter](#), [LinkedIn](#), [Facebook](#) and [Instagram](#).



#### SonicWall, Inc.

1033 McCarthy Boulevard | Milpitas, CA 95035

Refer to our website for additional information.

[www.sonicwall.com](http://www.sonicwall.com)

SONICWALL®

© 2021 SonicWall Inc. ALL RIGHTS RESERVED.

SonicWall is a trademark or registered trademark of SonicWall Inc. and/or its affiliates in the U.S.A. and/or other countries. All other trademarks and registered trademarks are property of their respective owners. The information in this document is provided in connection with SonicWall Inc. and/or its affiliates' products. NO LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE, TO ANY INTELLECTUAL PROPERTY RIGHT IS GRANTED BY THIS DOCUMENT OR IN CONNECTION WITH THE SALE OF SONICWALL PRODUCTS. EXCEPT AS SET FORTH IN THE TERMS AND CONDITIONS AS SPECIFIED IN THE LICENSE AGREEMENT FOR THIS PRODUCT, SONICWALL AND/OR ITS AFFILIATES ASSUME NO LIABILITY WHATSOEVER AND DISCLAIMS ANY EXPRESS, IMPLIED OR STATUTORY WARRANTY RELATING TO ITS PRODUCTS INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT. IN NO EVENT SHALL SONICWALL AND/OR ITS AFFILIATES BE LIABLE FOR ANY DIRECT, INDIRECT, CONSEQUENTIAL, PUNITIVE, SPECIAL OR INCIDENTAL DAMAGES (INCLUDING, WITHOUT LIMITATION, DAMAGES FOR LOSS OF PROFITS, BUSINESS INTERRUPTION OR LOSS OF INFORMATION) ARISING OUT OF THE USE OR INABILITY TO USE THIS DOCUMENT, EVEN IF SONICWALL AND/OR ITS AFFILIATES HAVE BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. SonicWall and/or its affiliates make no representations or warranties with respect to the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. SonicWall Inc. and/or its affiliates do not make any commitment to update the information contained in this document.

Datasheet-TZSeries-Gen6-JK-5987