

> aWXFH

Very high smudge resistance

Very good printing quality

Excellent receptor multi-compatibility and sensitivity




AWX®FH is a resin enhanced wax ribbon.

Intrinsically, it is the highest performance wax ribbon of the inkanto range, enabling it to answer the requirements of all wax applications, including the most demanding ones, with very good resistance.




Zapraszamy do kontaktu!
Więcej informacji: www.kreski.pl

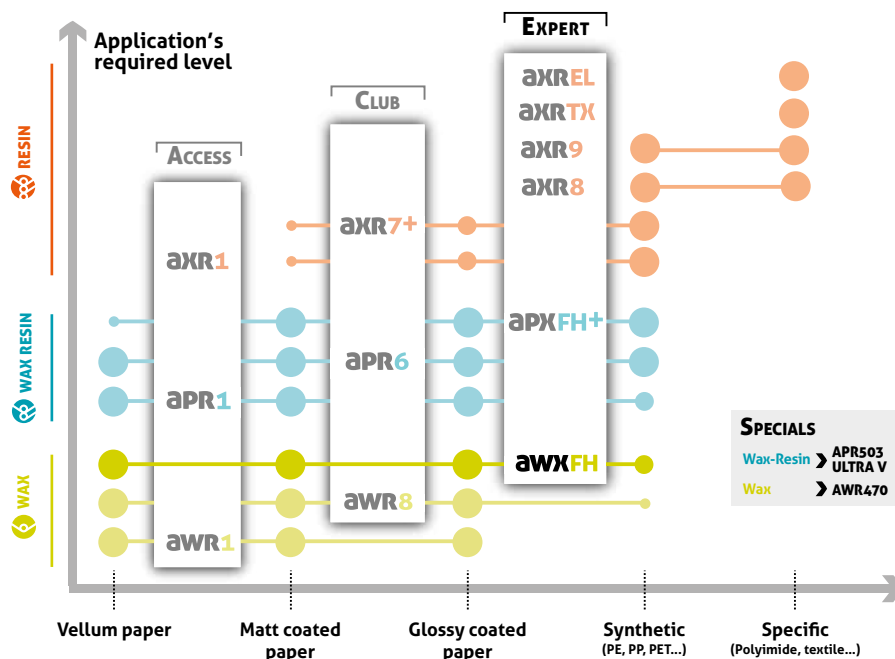


Printing receptor

papers		synthetics	
Vellum	● ● ●	PP	● ● ○
Coated	● ● ●	PE	● ● ○
Glossy coated	● ● ●	PET	● ● ○

Printer settings

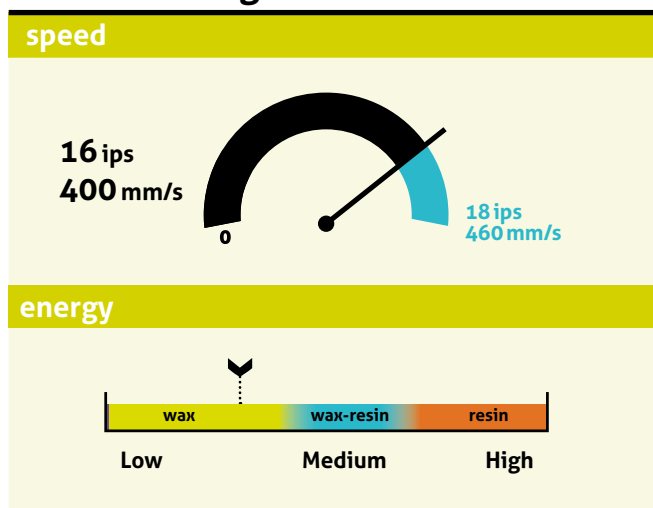

Print resistance

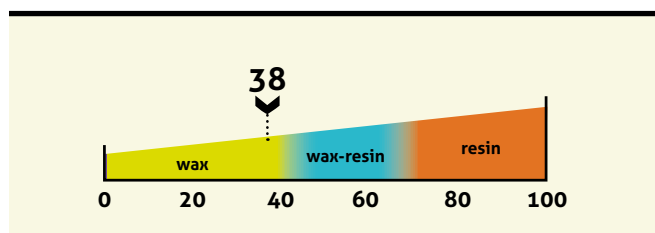

Compliant with the following regulations

REACH / SVHC 1907/2006/EC
Food Contact 1935/2004/EC
Heavy metals 2011/65/EU
California Proposition 65
Halogen restrictions

Your ribbon identity

Colours: ●

Length (m):


Width (mm):

Part number:

Your distributor:

Contact :

Application fields

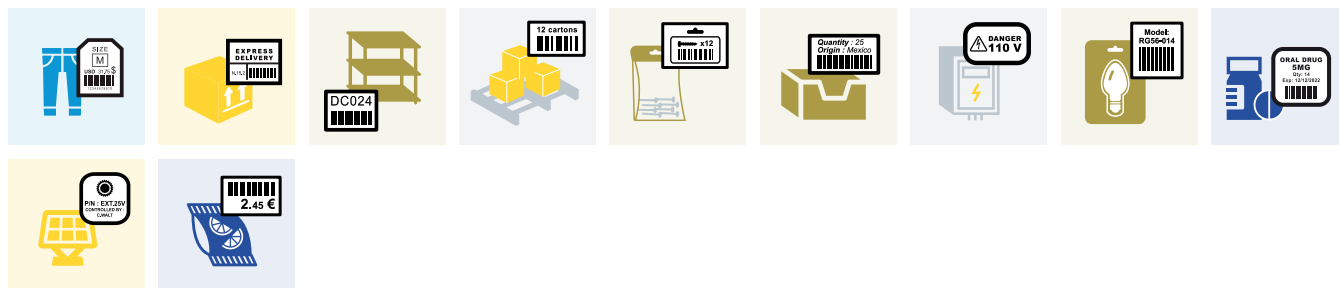

Product performance

print quality		
90°Barcode		A _a Small characters
0°Barcode		2D Barcode
		Logos
		Blackness
technical resistances		
Heat		Light/Blue Wool
Water/Submerge		Solvents
		Rubbing

Product physico-chemical features

product structure		
	PET film	Thickness: 4,5 µm
	Ink	Wax
	Melting point	65°C/149°F
	Backcoating	Silicon based
	Coefficient of Friction	Kd < 0.2
	Ribbon thickness	< 9 µm
The ribbon is anti static build-up treated		

Storage

storage conditions

12 months recommended
20-80 % Humidity Rate, 5-35°C (40-95°F)

Waste management

inkanto rolls and their packaging allow an optimised waste management. For more information please contact ARMOR.