


# > aWR470

Particularly adapted to all kinds of paper substrates  
Very good sensitivity  
Excellent blackness

**Kreski**  
Zapraszamy do kontaktu!  
Więcej informacji: [www.kreski.pl](http://www.kreski.pl)


**AWR®470 SolFree®** is the only ribbon in the world to be coated without using solvents, including for the backcoating. SolFree® represents a saving of 365g of CO<sub>2</sub> compared to the same ribbon (with average dimensions) produced with a traditional process for the backcoating. AWR®470 SolFree® is well known for its high coverage ability which is essential for printing the rough materials widely used in logistics.

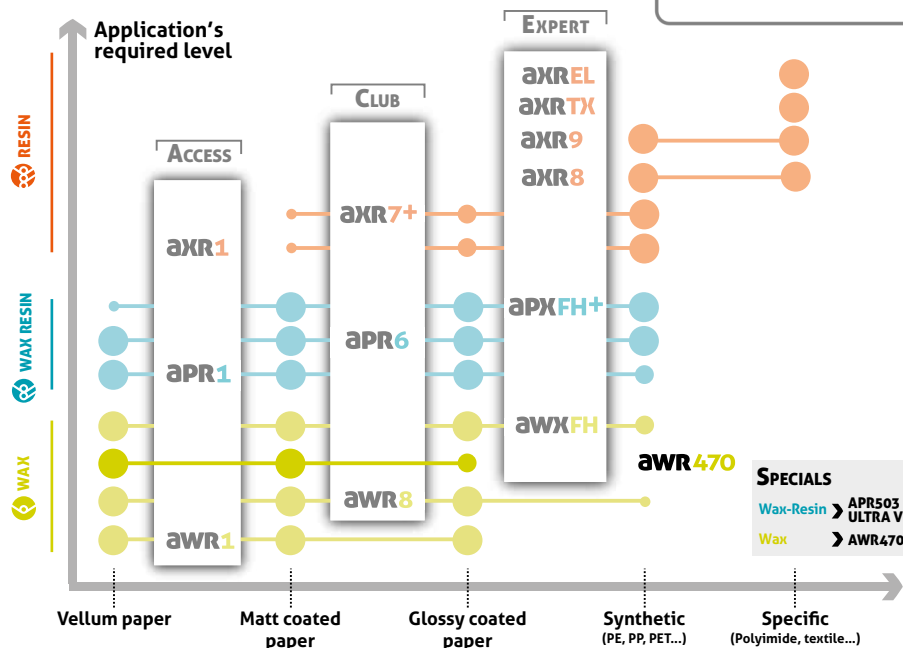


## Printing receptor

papers	
Vellum	● ● ●
Coated	● ● ●
Glossy coated	● ● ○

## Printer settings

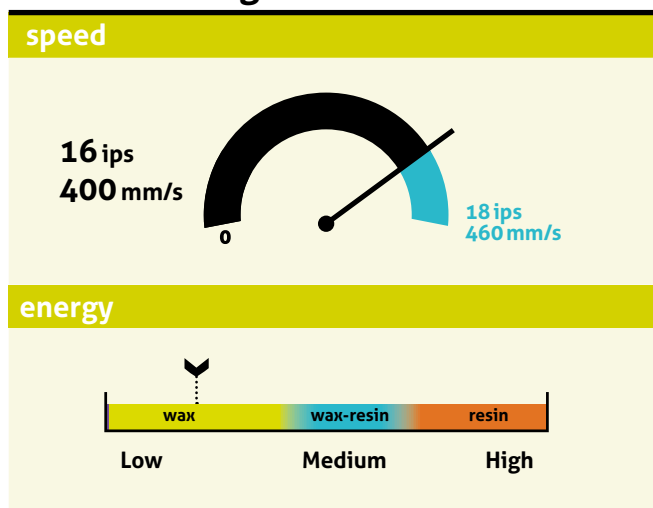

## Print resistance

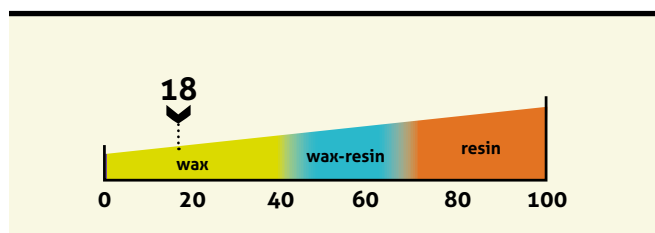

## Compliant with the following regulations

REACH / SVHC 1907/2006/EC
Food Contact 1935/2004/EC
Heavy metals 2011/65/EU
California Proposition 65
Halogen restrictions

## Your ribbon identity

Colours: ● ● ● ● ●

Length (m): .....

Width (mm): .....


Part number: .....

Your distributor: .....

Contact: .....

# > aWR 470

## Application fields

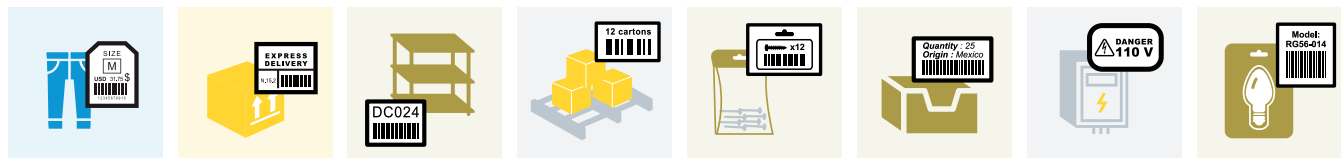

## Product performance

print quality			
90°Barcode		A <sub>a</sub> Small characters	
0°Barcode		2D Barcode	
		Logos	
		Blackness	 <small>*Optical Density by Reflection, measured using a densitometer.</small>
technical resistances			
Heat		Light/Blue Wool	
Water/Submerge		Rubbing	
		Solvents	

## Product physico-chemical features

product structure		
	PET film	Thickness: 4,5 µm
	Ink	Wax
	Melting point	65°C/149°F
	Backcoating	Patented Solfree®
	Coefficient of Friction	Kd < 0.2
	Ribbon thickness	< 9 µm
	The ribbon is anti static build-up treated	

## Storage

### storage conditions

12 months recommended  
20-80 % Humidity Rate, 5-35°C (40-95°F)

## Waste management

inkanto rolls and their packaging allow an optimised waste management. For more information please contact ARMOR.