

Charger Specifications:

Temperature Limits:

Operating Range: 0°C to +40°C
Storage Range: -10°C to +50°C

Dimensions:

Width: 6.3 inches (160 mm)
Length: 16.5 inches (420 mm)
Height: 4.5 inches (114 mm) - without
batteries or devices inserted.
Weight: 2.6 lb (1150 g)

Warranty:

Each charger is guaranteed
to be free from defects in
materials and workmanship
for 24 months from date of
shipment under normal use.



Compatible Batteries:

HMC70-Li(22) Honeywell® Battery
HMC70-Li(36) Honeywell® Battery
HMC70-Li(48) Honeywell® Battery


- Highest quality cells used.
- Longer cycle life.
- Extremely rugged.
- Rigorous testing.



Global Technology Systems

HCH-7033-CHG

Cradle & Battery Charger

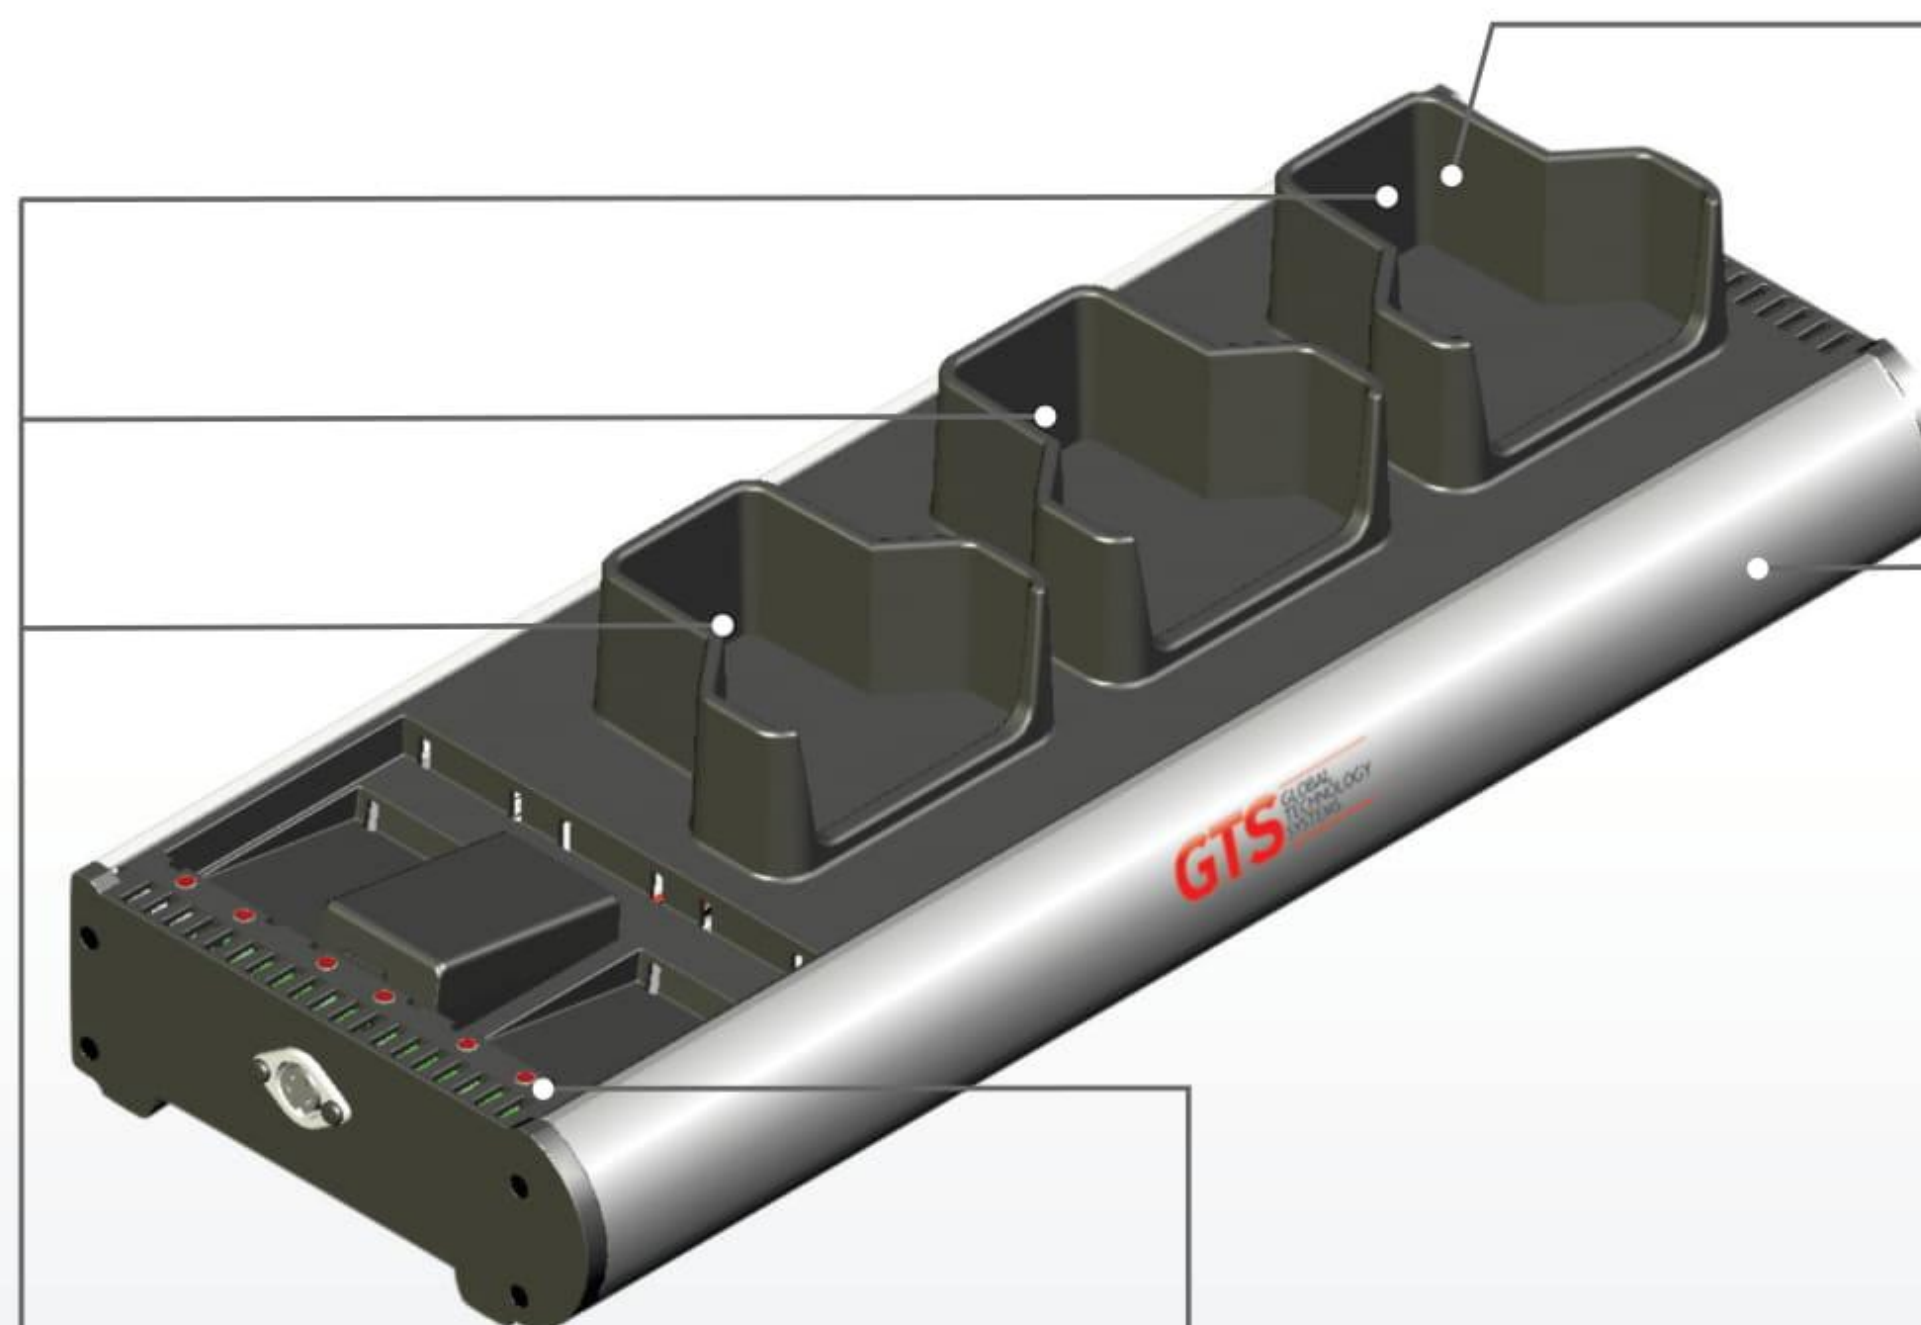

Dual-chemistry charger

Supports Li-Ion and Li-Polymer
chemistries.

Hassle-free mounting

Utilizes same mounting bracket as
Symbol® chargers for easy wall mounting.

Made of highly rugged aerospace
grade aluminium housing.

Includes power supplies
and cable.

More efficiency in less space

Charges spare batteries plus the batteries
in devices simultaneously and fast.

Tri-color charging indications

A charging LED indicates charging status.

