


> aXR7+

Excellent printing quality and sensitivity
Excellent resistance to smudge and scratch
Good resistance to high temperature
Receptor multi-compatibility

Kreski

Zapraszamy do kontaktu!
Więcej informacji: www.kreski.pl


AXR®7+ is the standard resin ribbon of the inkanto range. Its high versatility (it also prints on coated papers), its performances (sharpness, printing speed) and its ability to widen the usual application fields of resin ribbons have resulted in making AXR®7+ the worldwide reference on this family of products.

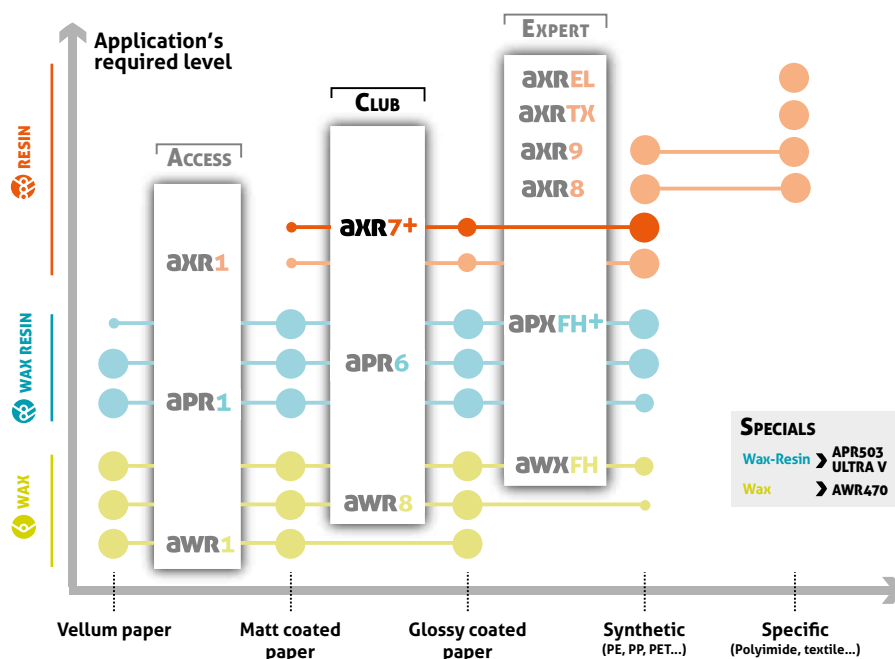


Printing receptor

papers		synthetics	
Coated	● ● ●	PP	● ● ●
Glossy coated	● ● ●	PE	● ● ●
		PET	● ● ●

Print resistance

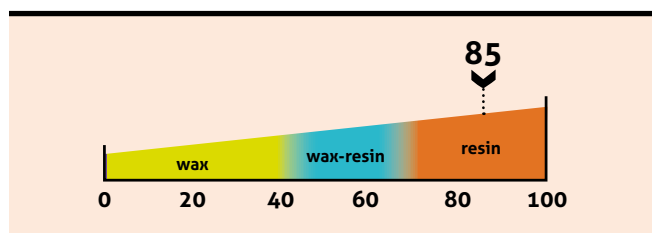

Printer settings

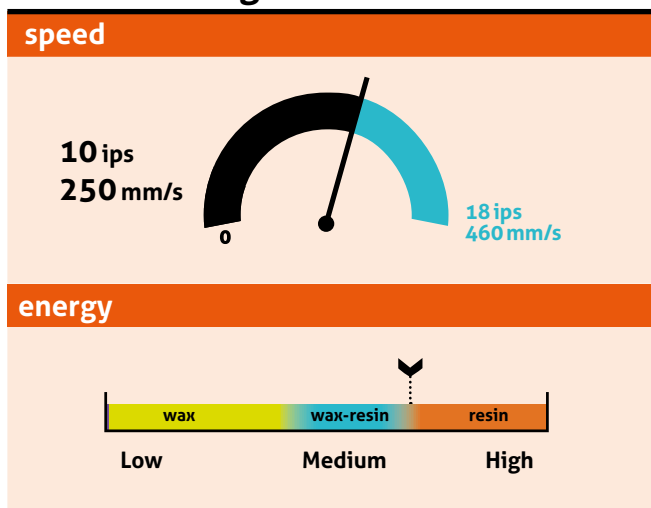

Compliant with the following regulations

REACH / SVHC 1907/2006/EC
Food Contact 1935/2004/EC
Heavy metals 2011/65/EU
California Proposition 65
Halogen Restrictions
UL 969

Your ribbon identity

Colours: ● ○ ● ● ●

Length (m):

Width (mm):

Part number:

Your distributor:

Contact :



> aXR7+

Application fields



Product performance

print quality			
90°Barcode	95	A _a Small characters	95
0°Barcode	100	2D Barcode	100
		Logos	95
		Blackness	1,7 ODR*
technical resistances			
Heat	180°C 356°F	Light/Blue Wool	>7
Water/Submerge	100	Rubbing	95
		Solvents	60
		Rubtester: 939g, no damage after ... cycles : IPA: 120 Ethanol: 25 Mineral Spirit: 60 Unleaded gasoline 98: nr* Motor oil: 250 Brake fluid: nr* *not recommended	

Product physico-chemical features

product structure			
		PET film	Thickness: 4,5 µm
		Ink	Resin
		Melting point	80°C/176°F
		Backcoating	Silicon based
		Coefficient of Friction	Kd < 0.2
		Ribbon thickness	< 9 µm
The ribbon is anti static build-up treated			

Storage

storage conditions

12 months recommended
20-80 % Humidity Rate, 5-35°C (40-95°F)

Waste management

inkanto rolls and their packaging allow an optimised waste management. For more information please contact ARMOR.