

Global Technology Systems

HCH-3060-CHG

6 Bay Cradle Charger for the Motorola® MC3000/MC3100 Devices

Charger Specifications:

Temperature Limits:

Operating Range: 0°C to +40°C

Storage Range: -10°C to +50°C

Dimensions:

Width: 6.3 inches (160 mm)

Length: 24.8 inches (630 mm)

Height: 4.25 inches (108 mm) - without
batteries or devices inserted.

Weight: 5.6 lb (2500 g)

Warranty:

Each charger is guaranteed
to be free from defects in
materials and workmanship
for 24 months from date of
shipment under normal use.



Compatible Batteries:

HMC3000-IMG-Li Honeywell® Battery

HMC3000-LAS-Li Honeywell® Battery

- Highest quality cells used.
- Longer cycle life.
- Extremely rugged.
- Rigorous testing.




Made of highly rugged aerospace
grade aluminium housing.

Includes power supplies
and cable.

Dual-chemistry charger

Supports Li-Ion and Li-Polymer
chemistries.

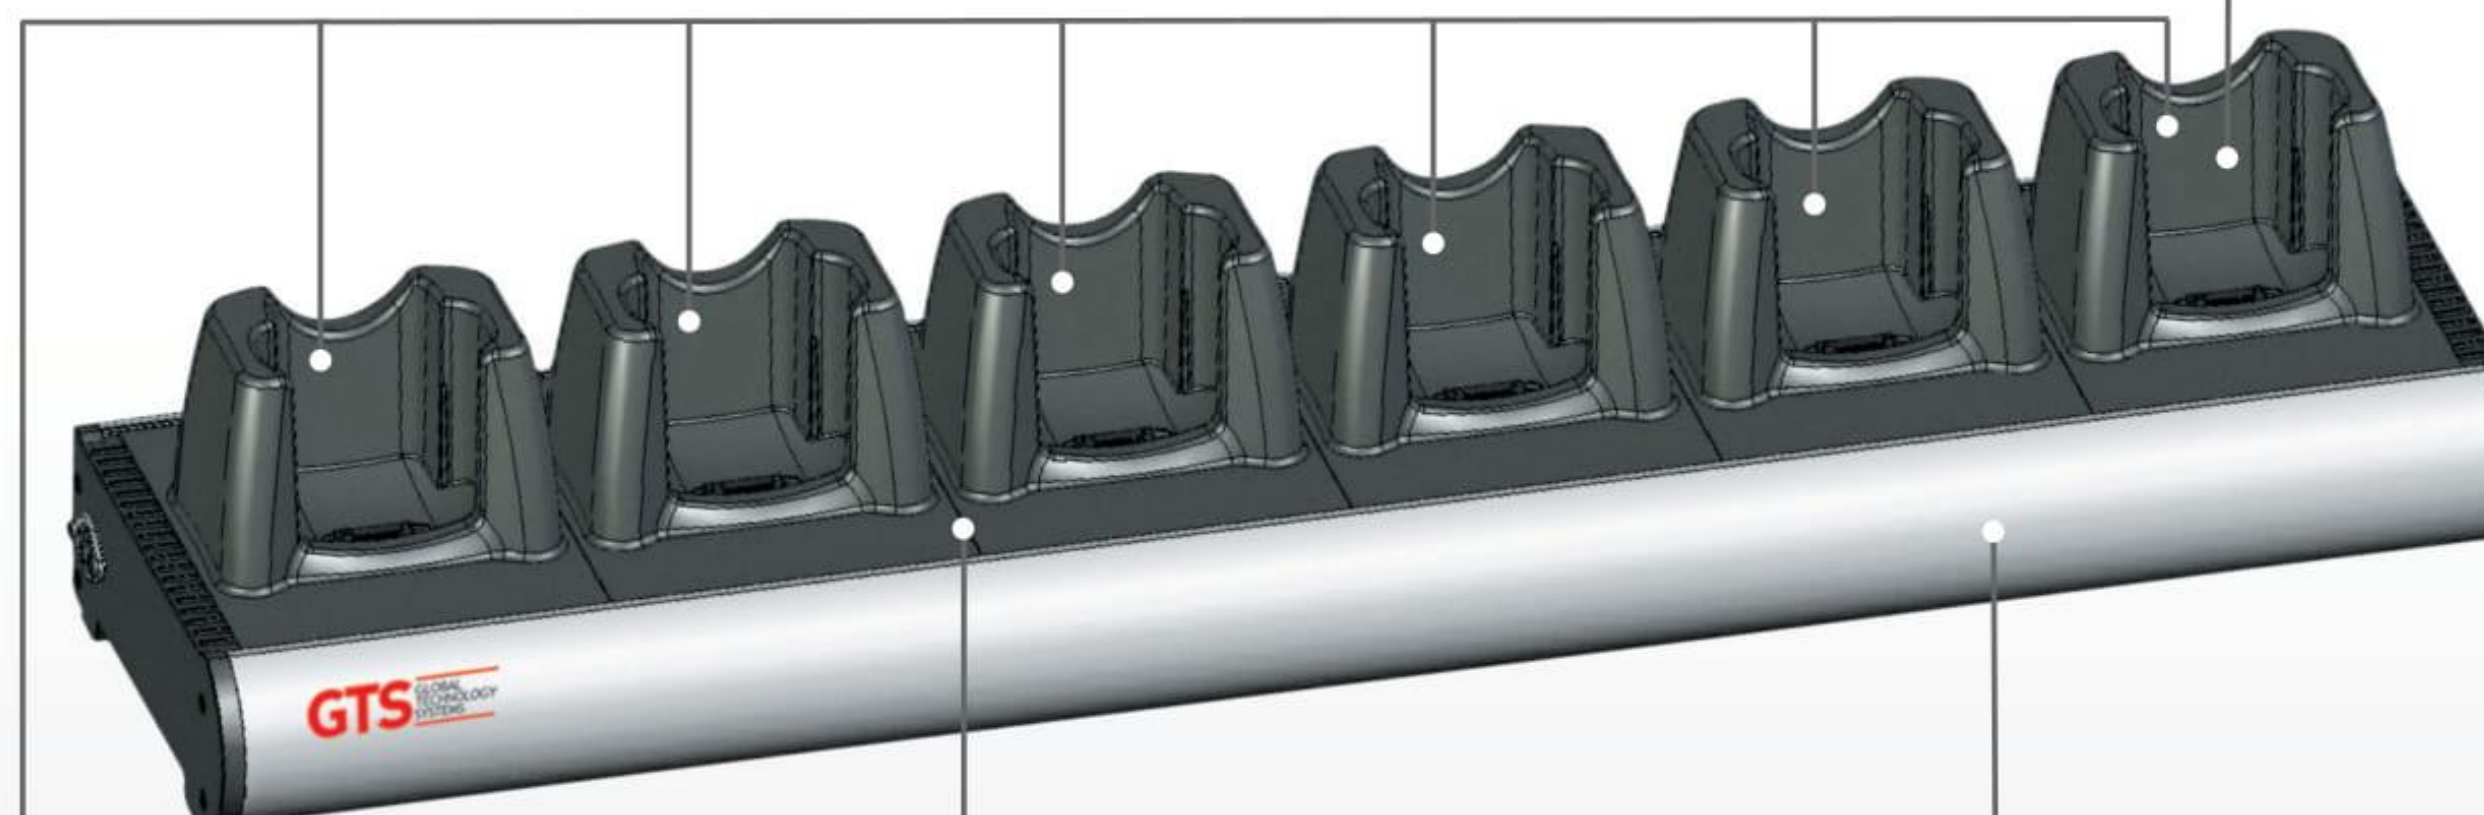

More charging in less space

Charges 50% more batteries in
same space as OEM charger.

Tri-color charging indications

A charging LED indicates charging status.



Hassle-free mounting

Utilizes same mounting bracket as
Symbol® chargers for easy wall mounting.