



# > **APR600**


Excellent sensitivity and receptor multi compatibility

very good printing quality at high speed and sharpness of 90°

Very high resistance to smudge

**APR® 600 is the worldwide reference of premium ribbons for Corner Edge and Near Edge printers.**

It is the standard ribbon in inkanto's wax/resin range. Its performance (speed, sensitivity, versatility, blackness) provides a perfectly adapted answer to a large majority of applications.

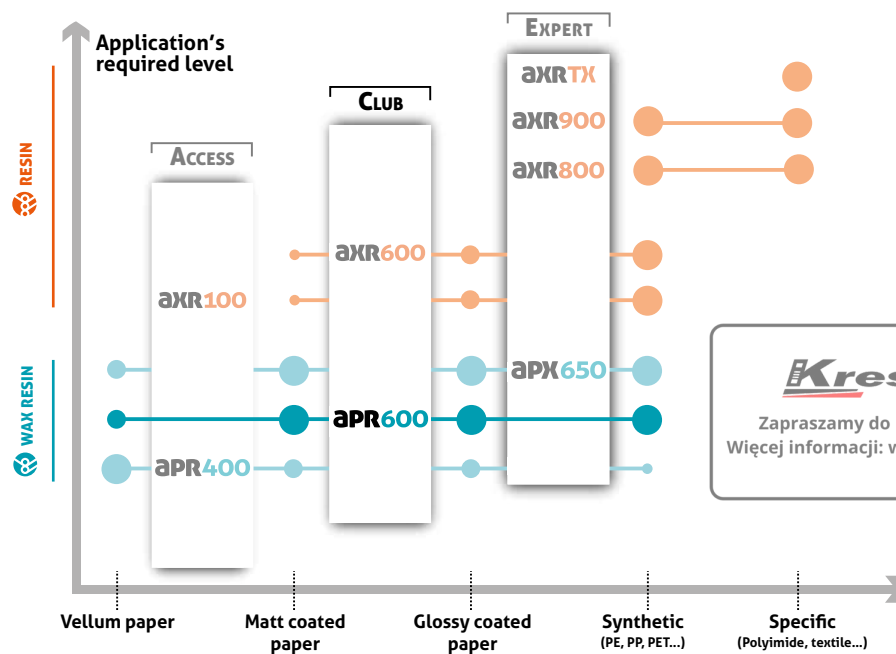


**Kreski**

Zapraszamy do kontaktu!  
Więcej informacji: [www.kreski.pl](http://www.kreski.pl)


## Printing receptor

papers		synthetics	
Vellum	● ● ○	PP	● ● ●
Coated	● ● ●	PE	● ● ●
Glossy coated	● ● ●	PET	● ● ●

## Print resistance

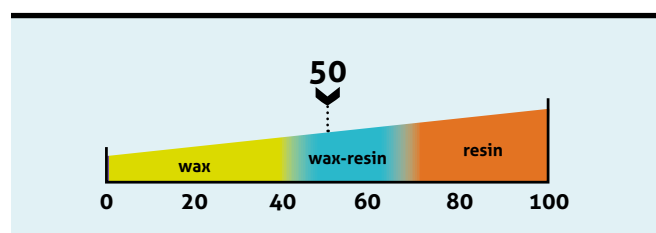

## Printer settings

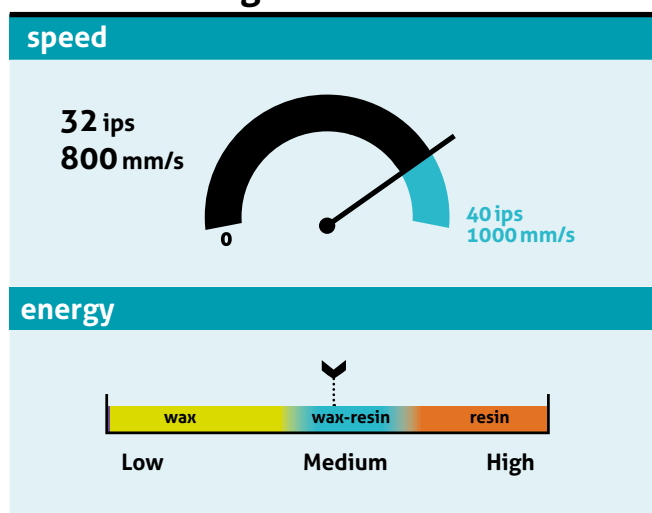

## Compliant with the following regulations

REACH / SVHC 1907/2006/EC
Food Contact 1935/2004/EC
Heavy metals 2011/65/EU
California Proposition 65
Halogen restrictions
UL 969

## Your ribbon identity

Colours: ● ● ● ● ● ● ● ● ● ●

Length (m): .....


Width (mm): .....

Part number: .....

Your distributor: .....

Contact : .....

## Application fields

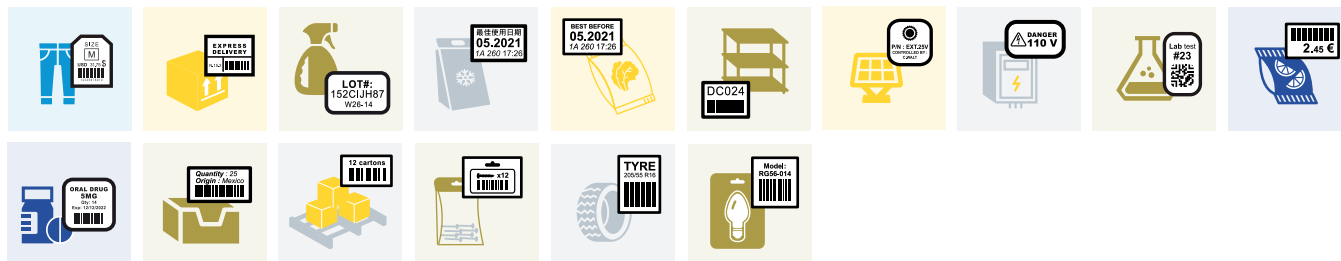

## Product performance

print quality		
90°Barcode		A <sub>a</sub> Small characters
0°Barcode		2D Barcode
		Logos
		Blackness <small>*Optical Density by Reflection, measured using a densitometer.</small>
technical resistances		
Heat		Light/Blue Wool
Water/Submerge		Solvents
		Rubbing

## Product physico-chemical features

product structure		
	PET film	Thickness: 4,5 µm
	Ink	Wax-Resin
	Melting point	80°C/176°F
	Backcoating	Silicon based
	Coefficient of Friction	Kd < 0.2
	Ribbon thickness	< 8 µm
	The ribbon is anti static build-up treated	

## Storage

### storage conditions

12 months recommended  
20-80 % Humidity Rate, 5-35°C (40-95°F)

## Waste management

inkanto rolls and their packaging allow an optimised waste management. For more information please contact ARMOR.