


> axr9

Excellent printing quality on textile materials
Excellent resistance to some solvents and detergents
Very good resistance to heat


AXR®9 is a resin ribbon initially designed for the textile label printing market.
It can also represent a relevant solution for niche resin applications (involving for example sterilization or resistance to some solvents) which are not satisfied by other resin ribbons.

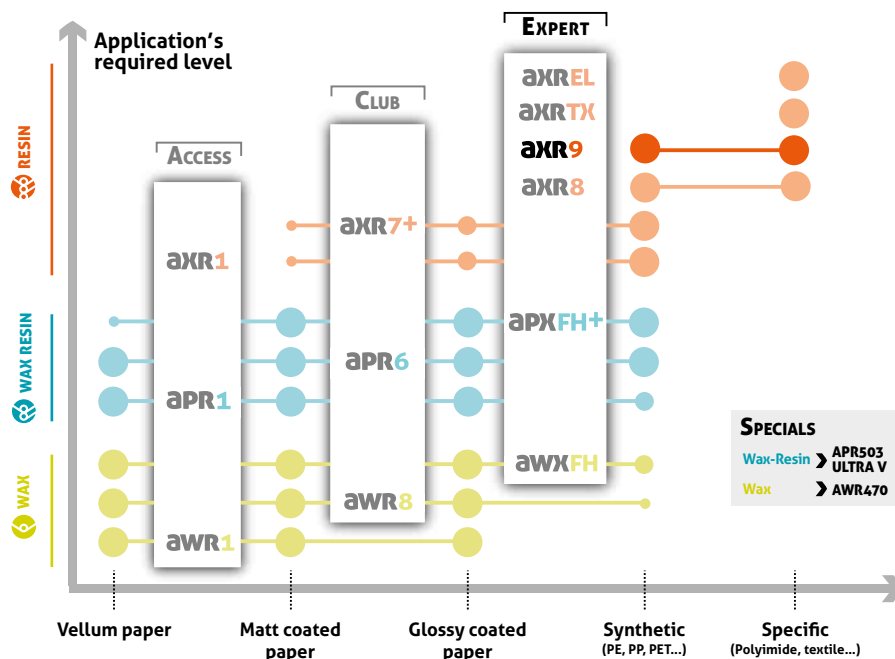


Printing receptor

synthetics		specific	
PP	● ● ●	Cotton	● ● ●
PE	● ● ●	Acetate	● ● ●
PET	● ● ●	Nylon	● ● ●
		Satin	● ● ●

Print resistance

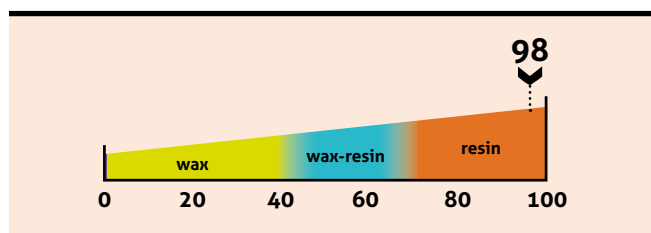

Printer settings

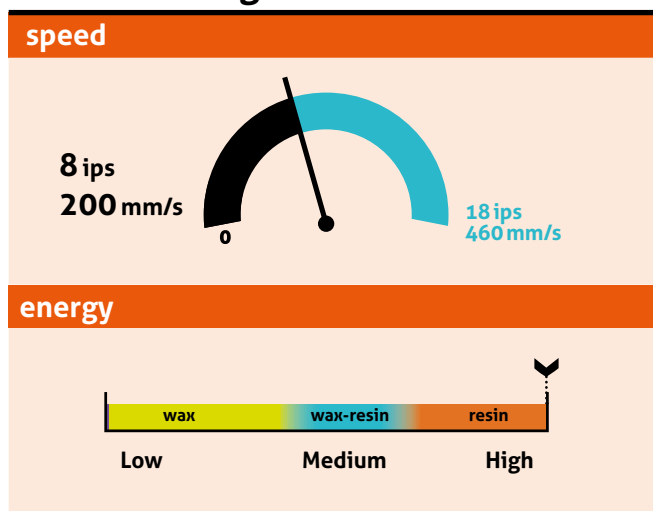

Compliant with the following regulations

REACH / SVHC 1907/2006/EC
Food Contact 1935/2004/EC
Heavy metals 2011/65/EU
California Proposition 65
UL 969

Your ribbon identity

Colours: ●

Length (m):

Width (mm):

Part number:

Your distributor:

Contact :

> axr9

Application fields



Kreski
Zapraszamy do kontaktu!
Więcej informacji: www.kreski.pl

Product performance

print quality					
90°Barcode		A _a Small characters		Logos	
0°Barcode		2D Barcode		Blackness	
technical resistances					
Heat		Light/Blue Wool		Washing: Home: Industrial: Dry cleaning: Bleach: Ironing:	
Water/Submerge		Rubbing			

Product physico-chemical features

product structure		
	PET film	Thickness: 4,5 µm
	Ink	Resin
	Melting point	85°C/185°F
	Backcoating	Silicon based
	Coefficient of Friction	Kd < 0.2
	Ribbon thickness	< 8 µm
	The ribbon is anti static build-up treated	

Storage

storage conditions

12 months recommended
20-80 % Humidity Rate, 5-35°C (40-95°F)

Waste management

inkanto rolls and their packaging allow an optimised waste management. For more information please contact ARMOR.