

09 RTC-600A


Rugged Tablet Computers

5.7" Rugged Tablet Handheld, up to 1.6 GHz Quad Core Processor



Features

- 5.7" HD (1280 x 720) TFT LCD 420 nits Display with LED Backlight
- Up to 1.6 GHz Quad Core Processor
- 1/2 GB SDRAM
- Projected Capacitive Multi-Touch Panel, Gorilla Glass
- Li-Polymer High-Capacity Battery, up to 8 Hours Battery Life
- Extended Swappable Battery, MIL-STD 810G, IP67 Compliant
- GPS/ GLONASS Simultaneously
- WiFi b/g/n, BT 3.0, WWAN, 3G (Optional)
- Light Sensor/ G-Sensor/ E-Compass/ Vibration Motor
- 5MP Camera, 1D/2D BCS
- Supports NFC/RFID, Variant Extensions
- Docking Station (Optional)
- Up to Android™ 6.0

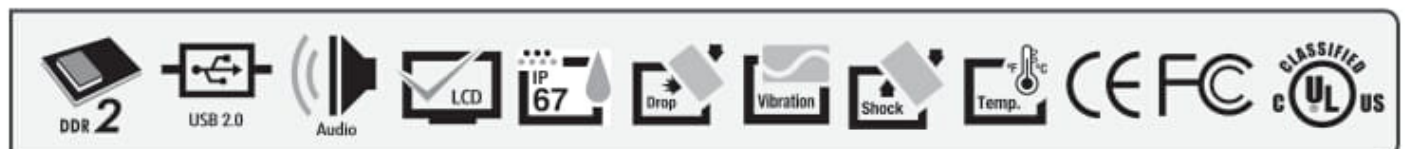

Sensor	Light Sensor, G-Sensor, 3-axis digital gyroscope,vibrator
Expansion Slot	Docking
Barcode Scanner (Optional)	1D Scanner support CMOS engine (Optional), 2D Scanner support LED engine
RFID (Optional)	HF RFID based on 13.56MHz compatible with NFC
Physical Key	—
Mechanical	
Color	Black
Dimension (W x H x D)	4.1" x 8.2" x 0.8"(105mm x 201mm x 21mm)
Gross Weight	0.94lb (0.43kg)
Environmental	
Operating Temperature	-20 °C ~ 60 °C (-4°F ~ 140°F)
Storage Temperature	-55 °C ~ 70 °C(-67°F ~ 158°F)
Humidity	50°C; 5% ~ 90% R/H; 120 hours, non-condensing
Environmental Sealing	IP67
Vibration	MIL-STD-810G Method 514.6 Procedure I, Cat. 24, Fig. 514.6E-1 & E-2
Drop	MIL-STD-810G Method 516.6 Procedure IV - Height of Drop: 122cm (48 inch; 4ft), - Number of Drop: 26 times, - Floor: Twoinch plywood backed by concrete, - For all surfaces, edges and corners
ESD	Air charge: +/- 8KV, Contact charge: +/- 4KV
Certifications and Standards	UL: UL60950-1, CE/LVD: EN60950-1, FCC, CE
Power Supply	
AC / DC Adapter	AC 100~240V, 50~60Hz ; DC 12V/3A (36W)
Battery Life	Li-polymer High Capacity Battery, up to 8 Hours Battery Life
Master Battery	External Battery: 7.4V 1530mAH
Slave Battery	Removable Battery: 7.4V 1530mAH
Display	
LCD	5.7" TFT LCD / 16:9, with LED backlight
Resolution	1280 x 720 Pixels
Maximum Color	—
Dot Size	—
Brightness	420 nits; optional Sunlight Readable*
Viewing Angle	Vertical/ Horizontal 1780
Touch Screen	
Touch Type	Projected capacitive multi-touch screen (PCT)
Light Transmission	Min 87% (ASTM D1003; Wavelength = 550nm)

* Sunlight readable by optional Anti-Reflective bonding and optional anti-glare film.


Specifications

System Architecture	
Processor	Up to 1.6 GHz Quad Core Processor
Operating System	Up to Android™ 6.0
Memory	Onboard 1/2 GB
Storage	Onboard 16 GB eMMC
Display	5.7" TFT LCD/ 16:9, with Projected Capacitive Multi-Touch screen
I/O Port	SIM Card x 1, Micro SD Card Slot x 1, USB 2.0 (type A) x 1, Micro USB port x 1, 3.5-mm stereo headphone jack x 1, DC-In Jack x 1, Built-in Speaker & Microphone
Communication	Bluetooth v4.0, Wi-Fi (802.11 b/g/n), NFC/ RFID (13.56MHz), 3G (Optional)
Navigation	GPS, Glonass
WWAN(optional)	3G: WCDMA
Camera	5/8 MP auto-focus rear camera with flash

RTC-600A

Dimension

Unit: mm

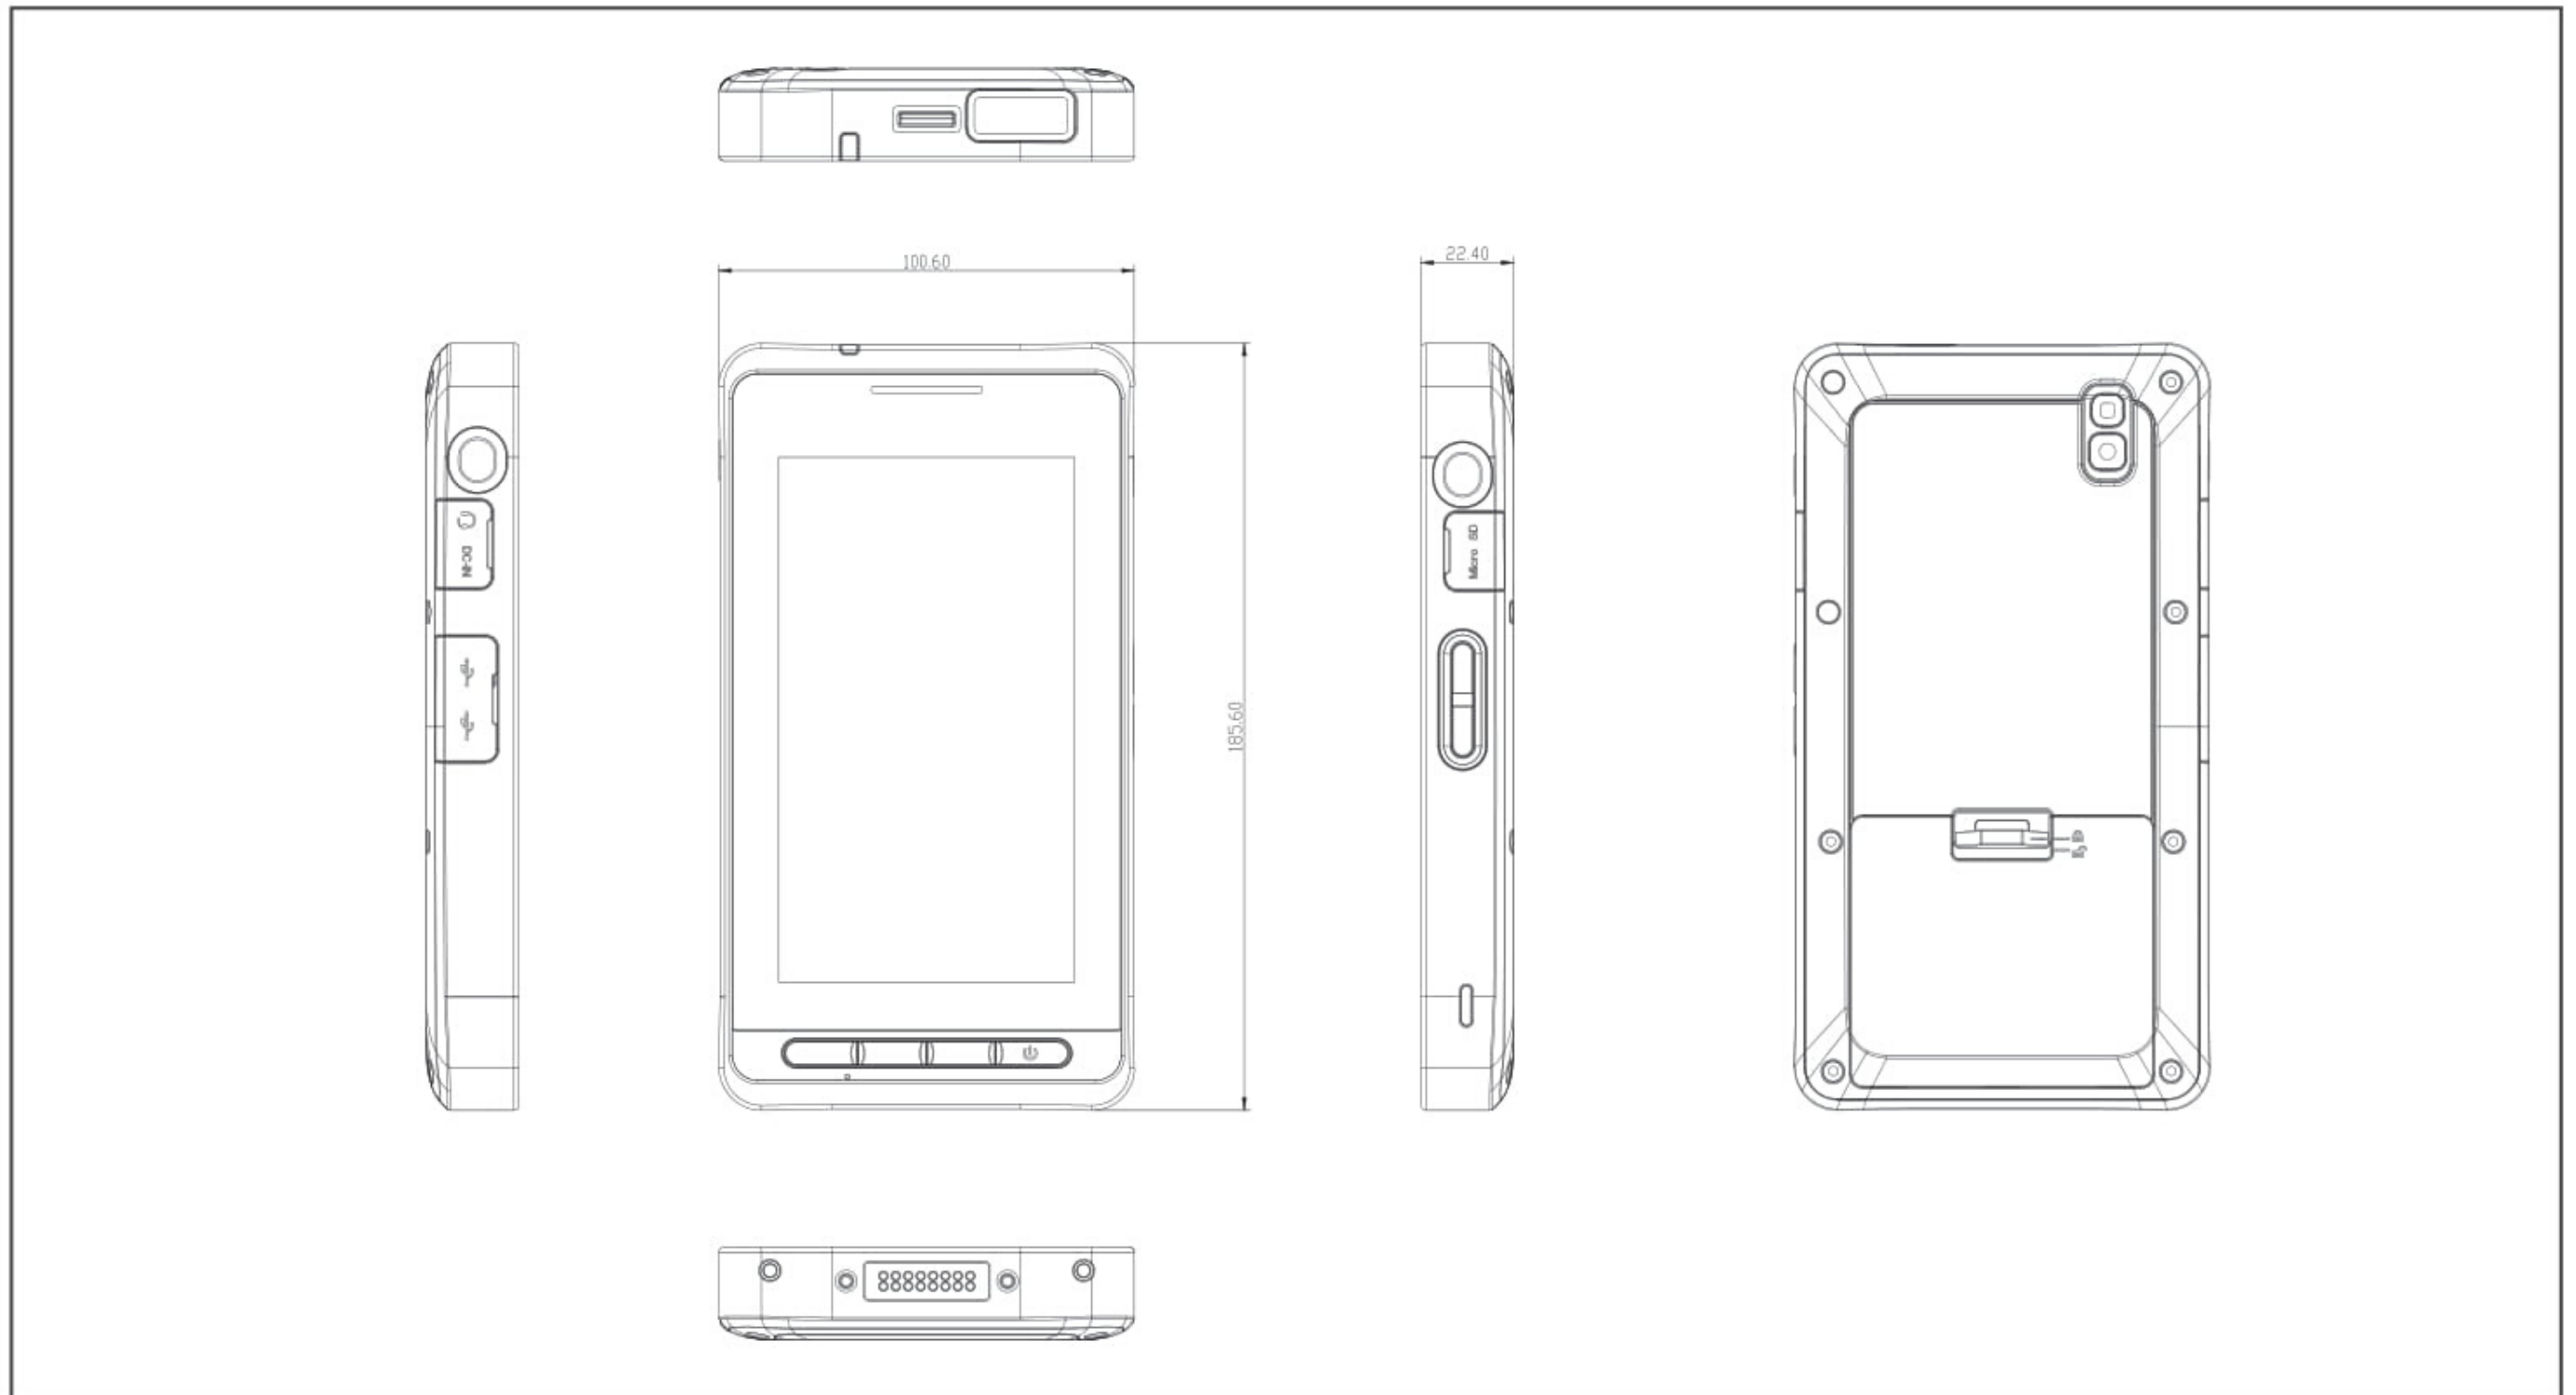

Packing List

- 1255300360 AC Power Adapter
- 9789600A00 Battery
- Product CD
- RTC-600A

Optional Accessories

- 1702031830 Power Cable for USA
- 1702031831 Power Cable for Europe
- RDS-1210-0000 Docking Station
- RDS-0040-0000 4-Bay Battery Charger
- 219600A00 Carry bag
- 9741600R04 Battery 2 Pcs in a Pack
- 1255900361 Car Adapter, Flying Type
- 1255900360 Car Adapter, Barrel Type

Ordering Information

* Small quantity MOQ may apply for optional/customized services.

Part Number	LCD Display	Touch Screen	System Memory	Storage	OS	WiFi/Bluetooth	WWAN	Navigation	Sensor	Camera	Battery	Expansion I/O	Size & Weight	Operation Temp	Durable	NFC (HF RFID)	2D Barcode Scanner	Docking
RTC-600A-TAD-WBG-5000	5.7"	Pcap 5-point	LPDDR2 1GB	16GB eMMC Flash	Android 4.2	802.11 b/g/n + BT3.0 + EDR	—	GPS	Light Sensor x 1 G Sensor x 1 3-axis digital groscope x 1 Vibrator x 1	5MP	Single Battery 7.4V, 1530mAh	USB 2.0 (type A) x 1, Micro USB x 1, Micro SD x 1, SIM Card x 1	L186.6 x W 100.6 x H 22.3 mm 430g	-4°F ~ 140°F (-20°C ~ 60°C)	Meet IEC 60529 IP67 standard Mil Std 810G-516.6, Procedure IV Mil Std 810G-514.6, Procedure I 26 drops of 48" height to 2" plywood over concrete with bumpers & uNits off 2 units to pass	—	—	YES
RTC-600A-TAD-WBGH-5100	5.7"	Pcap 5-point	LPDDR2 1GB	16GB eMMC Flash	Android 4.2	802.11 b/g/n + BT3.0 + EDR	850/1900/2100	GPS/Glonass/AGPS	Light Sensor x 1 G Sensor x 1 3-axis digital groscope x 1 Vibrator x 1	5MP	Dual-Battery Internal: 7.4V, 1530mAh External: 7.4V, 1530mAh	USB 2.0 (type A) x 1, Micro USB x 1, Micro SD x 1, SIM Card x 1	L186.6 x W 100.6 x H 22.3 mm 480g	-4°F ~ 140°F (-20°C ~ 60°C)	Meet IEC 60529 IP67 standard Mil Std 810G-516.6, Procedure IV Mil Std 810G-514.6, Procedure I 26 drops of 48" height to 2" plywood over concrete with bumpers & uNits off 2 units to pass	—	—	YES
RTC-600A-TAD-WBGH-5101	5.7"	Pcap 5-point	LPDDR2 1GB	16GB eMMC Flash	Android 4.2	802.11 b/g/n + BT3.0 + EDR	850/1900/2100	GPS/Glonass/AGPS	Light Sensor x 1 G Sensor x 1 3-axis digital groscope x 1 Vibrator x 1	5MP	Dual-Battery Internal: 7.4V, 1530mAh External: 7.4V, 1530mAh	USB 2.0 (type A) x 1, Micro USB x 1, Micro SD x 1, SIM Card x 1	L 186.6 x W 100.6 x H 22.3 mm 495g	-4°F ~ 140°F (-20°C ~ 60°C)	Meet IEC 60529 IP67 standard Mil Std 810G-516.6, Procedure IV Mil Std 810G-514.6, Procedure I 26 drops of 48" height to 2" plywood over concrete with bumpers & uNits off 2 units to pass	—	YES	YES
RTC-600A-TAD-WBGHR-5001	5.7"	Pcap 5-point	LPDDR2 1GB	16GB eMMC Flash	Android 4.2	802.11 b/g/n + BT3.0 + EDR	850/1900/2100	GPS/Glonass/AGPS	Light Sensor x 1 G Sensor x 1 3-axis digital groscope x 1 Vibrator x 1	5MP	Single Battery 7.4V, 1530mAh	USB 2.0 (type A) x 1, Micro USB x 1, Micro SD x 1, SIM Card x 1	L 186.6 x W 100.6 x H 22.3 mm 455g	-4°F ~ 140°F (-20°C ~ 60°C)	Meet IEC 60529 IP67 standard Mil Std 810G-516.6, Procedure IV Mil Std 810G-514.6, Procedure I 26 drops of 48" height to 2" plywood over concrete with bumpers & uNits off 2 units to pass	YES	YES	YES
RTC-600A-TAD-WBGHR-5101	5.7"	Pcap 5-point	LPDDR2 1GB	16GB eMMC Flash	Android 4.2	802.11 b/g/n + BT3.0 + EDR	850/1900/2100	GPS/Glonass/AGPS	Light Sensor x 1 G Sensor x 1 3-axis digital groscope x 1 Vibrator x 1	5MP	Dual-Battery Internal: 7.4V, 1530mAh External: 7.4V, 1530mAh	USB 2.0 (type A) x 1, Micro USB x 1, Micro SD x 1, SIM Card x 1	L 186.6 x W 100.6 x H 22.3 mm 495g	-4°F ~ 140°F (-20°C ~ 60°C)	Meet IEC 60529 IP67 standard Mil Std 810G-516.6, Procedure IV Mil Std 810G-514.6, Procedure I 26 drops of 48" height to 2" plywood over concrete with bumpers & uNits off 2 units to pass	YES	YES	YES
RTC-600A-TAD-WBGHR-6101	5.7"	Pcap 5-point	LPDDR3 2GB	16GB eMMC Flash	Android 6.0	802.11 b/g/n + BT3.0 + EDR	B1/ B3/ B5/ B7/ B8/ B20/ B38/ B40/ B41	GPS/Glonass/AGPS	Light Sensor x 1 G Sensor x 1 3-axis digital groscope x 1 Vibrator x 1	8MP	Dual-Battery Internal: 7.4V, 1530mAh External: 7.4V, 1530mAh	USB 2.0 (type A) x 1, Micro USB x 1, Micro SD x 1, SIM Card x 1	L 186.6 x W 100.6 x H 22.3 mm 495g	-4°F ~ 140°F (-20°C ~ 60°C)	Meet IEC 60529 IP67 standard Mil Std 810G-516.6, Procedure IV Mil Std 810G-514.6, Procedure I 26 drops of 48" height to 2" plywood over concrete with bumpers & uNits off 2 units to pass	YES	YES	YES