




> apx650

Very high resistance to smudge and scratch
Excellent sensitivity and receptor multi-compatibility
Very good printing quality at high speed

APX®650 is a high performance wax/resin ribbon for Corner Edge and Near Edge printers, providing a printing quality and mechanical resistance exceeding the market standards. These high performances contribute to secure your applications.

Kreski


Zapraszamy do kontaktu!
Więcej informacji: www.kreski.pl

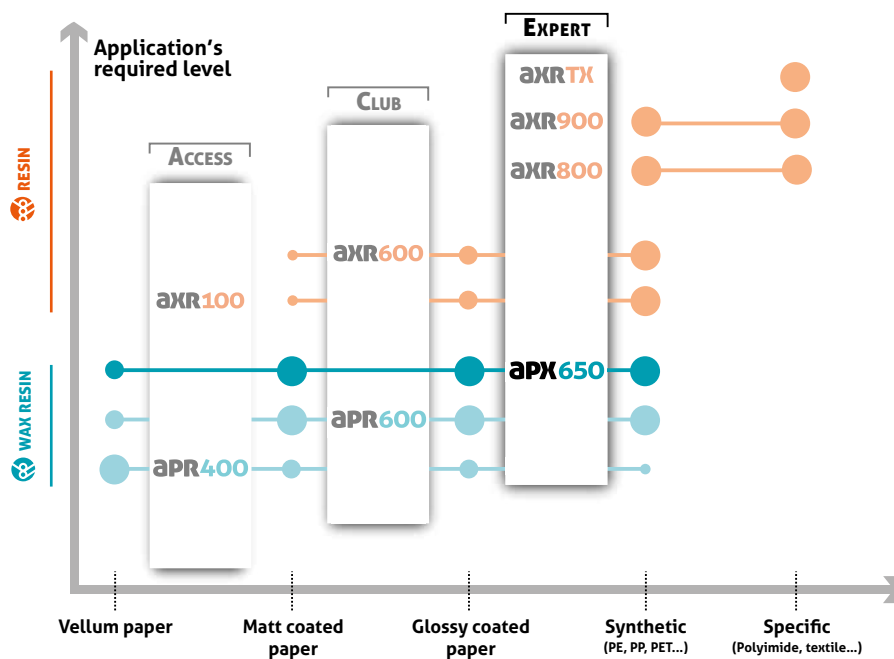


Printing receptor

papers		synthetics	
Vellum	● ● ○	PP	● ● ●
Coated	● ● ●	PE	● ● ●
Glossy coated	● ● ●	PET	● ● ●

Printer settings

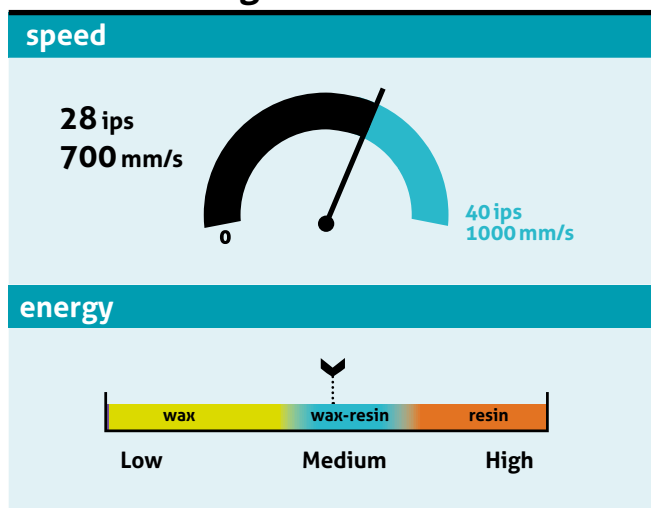

Print resistance

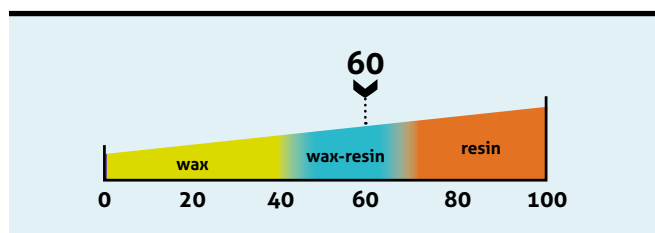

Compliant with the following regulations

REACH / SVHC 1907/2006/EC
Food Contact 1935/2004/EC
Heavy metals 2011/65/EU
California Proposition 65
UL 969

Your ribbon identity

Colours: ● ●

Length (m):

Width (mm):


Part number:

Your distributor:

Contact :

>apX650

Application fields

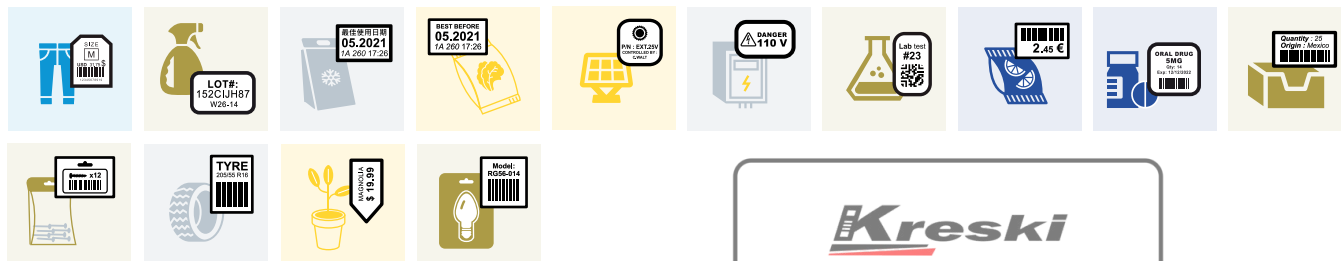

Product performance

print quality			
90°Barcode	85	A _a Small characters	90
0°Barcode	100	2D Barcode	98
		Logos	95
		Blackness	1,7 ODR*
technical resistances			
Heat	110°C / 230°F	Light/Blue Wool	>7
	300°C / 572°F	Solvents	100
Water/Submerge	100	Rubbing	80

Product physico-chemical features

product structure

PET film

Thickness: 4,5 µm

Ink

Wax-Resin

Melting point

85°C/185°F

Backcoating

Silicon based


Coefficient of Friction

Kd < 0.2

Ribbon thickness

< 9 µm

The ribbon is anti static build-up treated

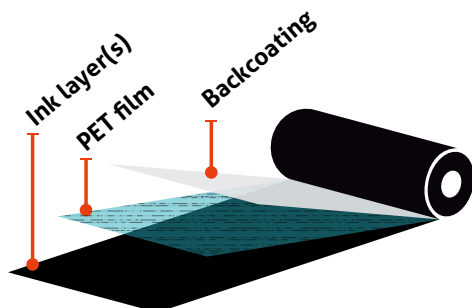

Storage

storage conditions

12 months recommended
20-80 % Humidity Rate, 5-35°C (40-95°F)

Waste management

inkanto rolls and their packaging allow an optimised waste management. For more information please contact ARMOR.