

> aXR800


Excellent resistance to solvents and to high temperature

Excellent resistance to smudge and scratch

Excellent printing quality

AXR®800 is a high performance resin ribbon for Corner Edge and Near Edge printers, designed for the most demanding applications regarding resistance to mechanical aggressions and/or heat and/or solvents.

It is fully compatible with the label materials dedicated to the same high performance applications.

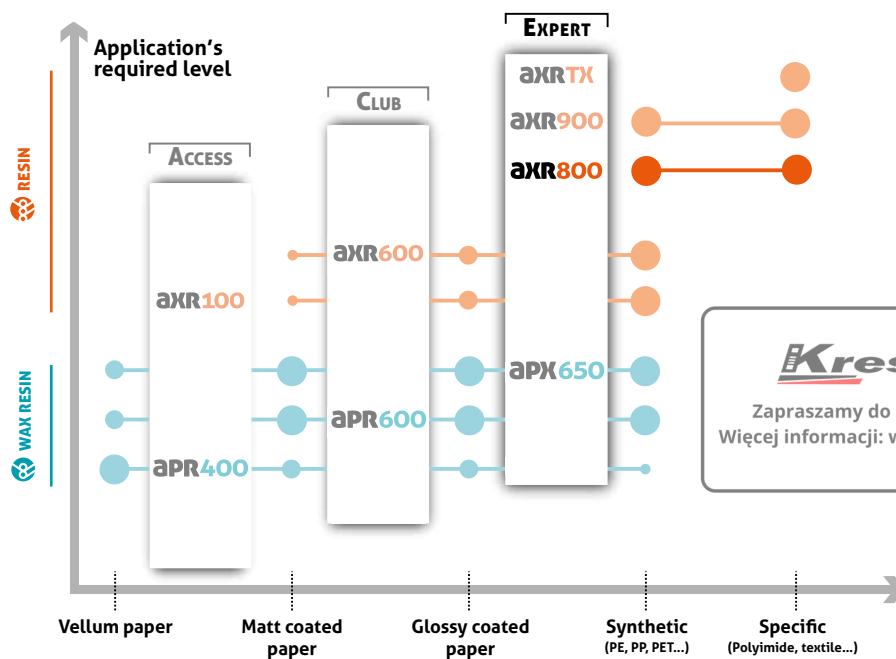


Kreski
Zapraszamy do kontaktu!
Więcej informacji: www.kreski.pl


Printing receptor

synthetics	specific
PP ● ● ●	Polyimide ● ● ●
PE ● ● ●	Acrylate ● ● ●
PET ● ● ●	

Printer settings

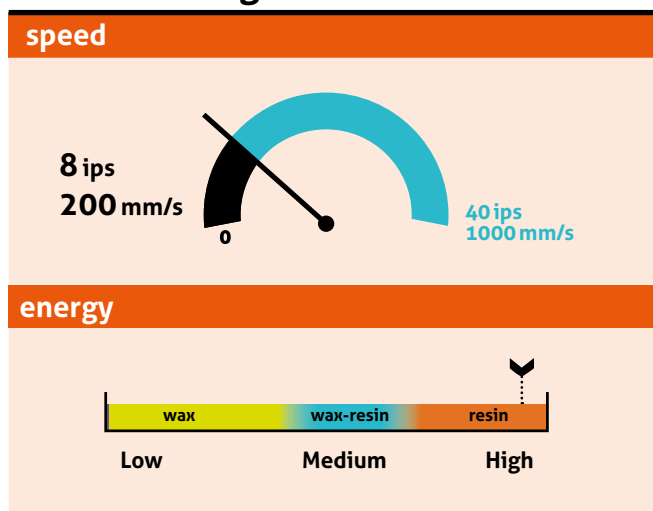

Print resistance

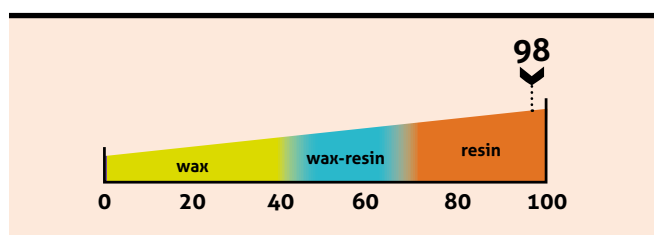

Compliant with the following regulations

REACH / SVHC 1907/2006/EC
Food Contact 1935/2004/EC
Heavy metals 2011/65/EU
California Proposition 65
UL 969

Your ribbon identity

Colours: ●

Length (m):

Width (mm):

Part number:

Your distributor:

Contact :

> axR800

Application fields



Kreski
Zapraszamy do kontaktu!
Więcej informacji: www.kreski.pl

Product performance

print quality			
90°Barcode	95	A _a Small characters	95
0°Barcode	100	2D Barcode	100
		Logos	95
		Blackness	1,6 ODR*
technical resistances			
Heat	250°C 482°F	Light/Blue Wool	>7
Water/Submerge	100	Rubbing	95
		Solvents	80
		Rubtester: 939g, no damage after ... cycles : IPA: 200 Ethanol: 50 Mineral Spirit: 70 Unleaded gasoline 98: 10 Motor oil: 250 Brake fluid: 10	

Product physico-chemical features

product structure			
		PET film	Thickness: 4,5 µm
		Ink	Resin
		Melting point	85°C/185°F
		Backcoating	Silicon based
		Coefficient of Friction	Kd < 0.2
		Ribbon thickness	< 9 µm
The ribbon is anti static build-up treated			

Storage

storage conditions

12 months recommended
20-80 % Humidity Rate, 5-35°C (40-95°F)

Waste management

inkanto rolls and their packaging allow an optimised waste management. For more information please contact ARMOR.