

> aXR900


Excellent printing quality on textile materials

Excellent resistance to wash and dry cleaning

Very good resistance to ironing

AXR®900 is a resin ribbon for Corner Edge and Near Edge printers designed for the textile label printing market.


It can also represent a relevant solution for niche resin applications (involving for example sterilization or resistance to some solvents) which are not satisfied by other resin ribbons.

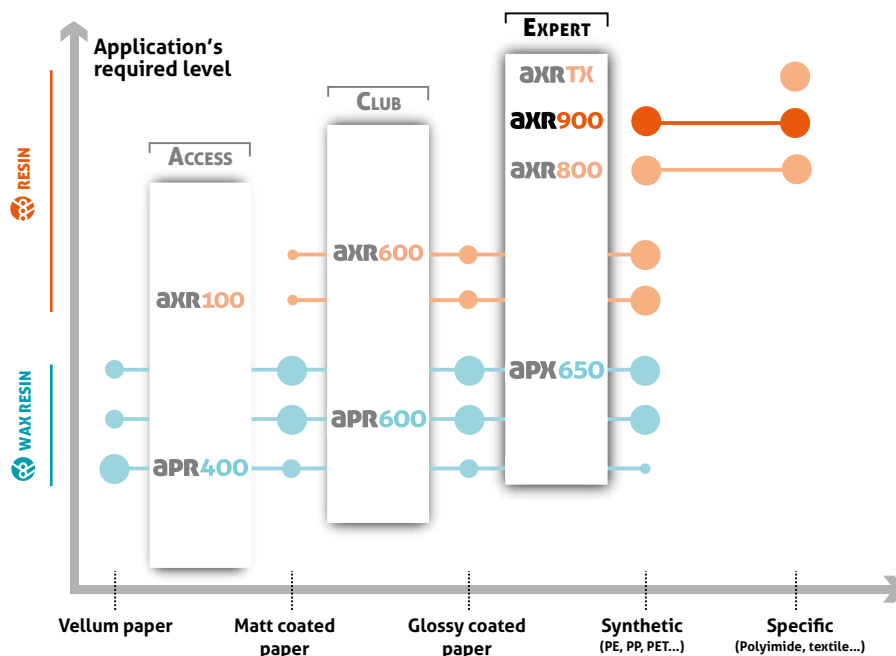


Printing receptor

synthetics		specific	
PP	● ● ●	Cotton	● ● ●
PE	● ● ●	Acetate	● ● ●
PET	● ● ●	Nylon	● ● ●
		Satin	● ● ●

Print resistance

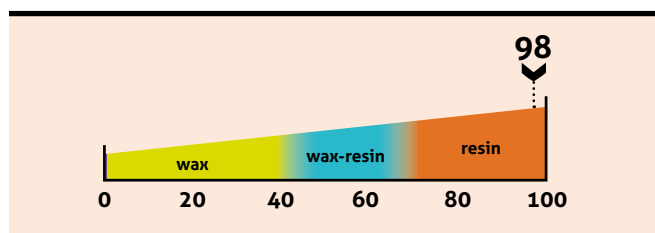

Printer settings

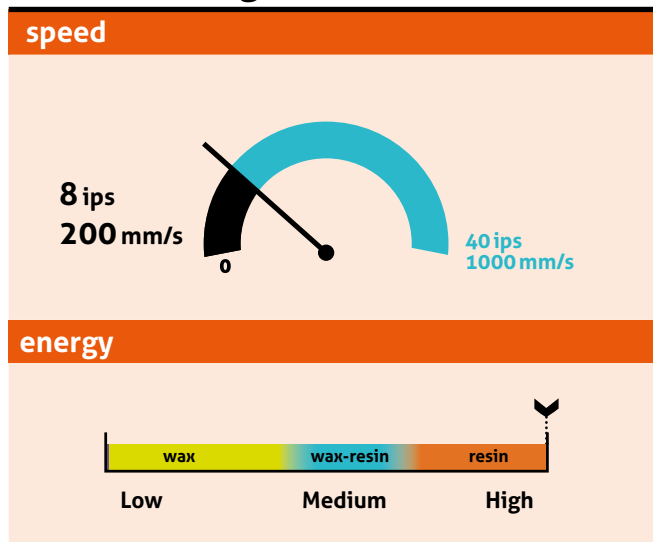

Compliant with the following regulations

REACH / SVHC 1907/2006/EC
Food Contact 1935/2004/EC
Heavy metals 2011/65/EU
California Proposition 65

Your ribbon identity

Colours: ●

Length (m):

Width (mm):

Part number:

Your distributor:

Contact :

Kreski

Zapraszamy do kontaktu!
Więcej informacji: www.kreski.pl



> aXR900

Application fields



Product performance

print quality					
90°Barcode		A _a Small characters		Logos	
0°Barcode		2D Barcode		Blackness	
technical resistances					
Heat		Light/Blue Wool		Washing:	
Water/Submerge		Rubbing		Home:	
				Industrial:	
				Dry cleaning:	
				Bleach:	
				Ironing:	

Product physico-chemical features

product structure		
	PET film	Thickness: 4,5 µm
	Ink	Resin
	Melting point	85°C/185°F
	Backcoating	Silicon based
	Coefficient of Friction	Kd < 0.2
	Ribbon thickness	< 8 µm
The ribbon is anti static build-up treated		

Storage

storage conditions

12 months recommended
20-80 % Humidity Rate, 5-35°C (40-95°F)

Waste management

inkanto rolls and their packaging allow an optimised waste management. For more information please contact ARMOR.