

MICROHAWK® ID-40

SPECIFICATIONS AND OPTIONS



Ultra-Compact

Height: 25 mm (0.98")
Width: 45 mm (1.77")
Length: 45 mm (1.77")

Integrated LEDs

WebLink
Interface
Onboard

DIMENSIONS

Height: 25 mm (0.98")
Width: 45 mm (1.77")
Length: 45 mm (1.77")
Weight: 68 g (2.40 oz.)

ENCLOSURE

IP-65/67, Aluminum

ENVIRONMENTAL

Operating Temperature: 0° to 45° C
(32° to 113° F)
Storage Temperature: -50° to 75° C
(-58° to 167° F)
Humidity: 5% to 95% (non-condensing)

EMISSIONS

EN 55022:2010 Class A Limits

ELECTRICAL

4.75-30 VDC, 200 mV p-p max ripple,
150 mA at 24 VDC (typ.)

CONNECTOR

M12 12-Pin Power, M12 8-Pin Ethernet

PASSIVE POE

24 Volt Passive Power over Ethernet, Type B.
Requires passive PoE power supply.

COMMUNICATION

RS-232, Ethernet TCP/IP, EtherNet/IP,
PROFINET I/O

DISCRETE I/O

3 in/3 out: Optoisolated Trigger and Input Common; New Master: Bi-directional, Optoisolated, 4.5-28 V rated (10 mA @ 28 VDC); Outputs (1, 2, 3): Bi-directional, Optoisolated, 1-28 V rated ($I_{CE} < 100$ mA at 24 VDC, current limited by user)

ILLUMINATION

High-Output LEDs: Inner: 4 Red (625 nm), 4 White; Outer: 8 Red, White, Blue or IR
Operating Life: 50,000 hours @ 25° C

INDICATORS

TRIG, PASS, FAIL, MODE, LINK, PWR LEDs,
2 Target Pattern LEDs; 2 Good Read Green Flash LEDs

SPEED

Standard (up to 10 FPS)
High-Speed (Max. Sensor FPS)

DECODER

Standard (High-Contrast 1D)
Plus (High-Contrast 1D/2D)
X-Mode (Poor or Damaged 1D/2D + DPM)

OPTICS

Standard Density, High-Density, UHD

SENSOR OPTIONS

WVGA (Mono): CMOS 0.34 MP (752 x 480)

SXGA (Mono): CMOS 1.2 MP (1280 x 960)

QSXGA (Color): CMOS 5 MP (2592 x 1944)

SHUTTER

Global (WVGA, SXGA), Rolling (QSXGA)

EXPOSURE TIME

50 - 100,000, Default: 2,500 μ s

FOCUS

Standard, HD: Fixed (50-300 mm) or Autofocus

UHD: Fixed (64 mm, 400 mm) or Autofocus

FRAMES PER SECOND

WVGA: Up to 60

SXGA: Up to 42

QSXGA: Up to 5

SYMBOLOGIES

2D: Data Matrix (ECC 0-200), QR Code, Micro QR Code, Aztec Code

Stacked: PDF417, MicroPDF417, GS1 Databar (Composite and Stacked)



Linear: Code 39, Code 128, BC412, Interleaved 2 of 5, UPC/EAN, Codabar, Code 93, PharmacoCode, PLANET, POSTNET, Japanese Postal, Australia Post, Royal Mail, Intelligent Mail, KIX

SAFETY AND QUALITY

FCC, CE, UL, RoHS-Compliant

QMS CERTIFICATION


www.microscan.com/quality

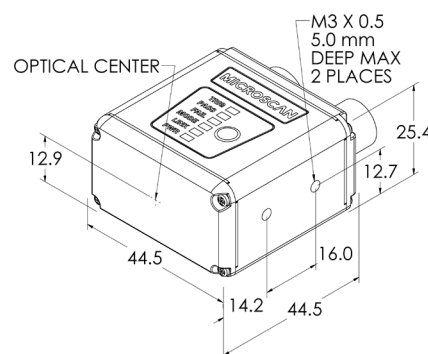

Note: Nominal dimensions in MM are shown.
Typical tolerances apply.


CONNECTOR A M12 12-Pin Plug:

Pin	Function
9	Host Rx/D
10	Host Tx/D
2	Power
7	Ground
1	Trigger
8	Input Common
3	Default
4	New Master
5	Output 1
11	Output 2
6	Output 3
12	Output Common



CONNECTOR B M12 8-Pin Socket:

Pin	Function
1	Reserved
2	Terminated
3	Reserved
4	TX (-)
5	RX (+)
6	TX (-)
7	Terminated
8	RX (-)



©2018 Omron Microscan Systems, Inc. SP092D-EN-0518
Specifications are subject to change. For complete technical information, please see the User Manual.
Warranty – For current warranty information about this product, please visit www.microscan.com/warranty.


OMRON
MICROSCAN

www.microscan.com

WVGA Sensor Fixed Focus Read Ranges

Focus Distance		WVGA HIGH-DENSITY							WVGA STANDARD DENSITY						
		Field of View		Typical 2D Mil Size	Depth of Field (mm)		Min. 2D Mil Size		Field of View		Typical 2D Mil Size	Depth of Field (mm)		Min. 2D Mil Size	
		in.	mm	mil size	Inside	Outside	mil size		in.	mm	mil size	Inside	Outside	mil size	
2.0	50	1.4	35	7.5	43	58	5		2.0	50	10	38	65	7.5	
2.5	64	1.5	38	7.5	55	73	5		2.2	55	10	49	78	7.5	
3.2	81	1.9	49	10	65	97	7.5		2.8	70	15	56	106	10	
4.0	102	2.6	65	10	83	121	10		3.7	94	20	52	152	15	
5.2	133	3.1	80	15	90	176	10		4.5	115	20	78	187	15	
7.5	190	4.5	114	20	133	246	15		6.5	165	30	128	252	20	
11.8	300	7.1	180	30	179	422	30		10.2	260	40	219	381	30	


Example Read Range:

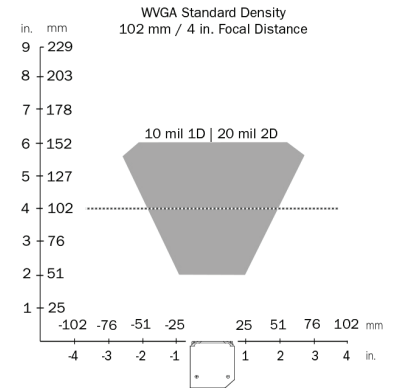

SXGA Sensor Fixed Focus Read Ranges

Focus Distance		SXGA HIGH-DENSITY							SXGA STANDARD DENSITY						
		Field of View		Typical 2D Mil Size	Depth of Field (mm)		Min. 2D Mil Size		Field of View		Typical 2D Mil Size	Depth of Field (mm)		Min. 2D Mil Size	
		in.	mm	mil size	Inside	Outside	mil size		in.	mm	mil size	Inside	Outside	mil size	
2.0	50	1.5	37	5	47	55	3.3		2.1	53	7.5	37	64	5	
2.5	64	1.6	41	5	58	70	3.3		2.3	59	7.5	49	78	5	
3.2	81	2.0	52	7.5	70	92	5		2.9	75	7.5	60	102	7.5	
4.0	102	2.7	69	7.5	88	116	5		3.9	100	10	74	131	7.5	
5.2	133	3.4	85	10	107	159	7.5		4.8	123	10	88	161	10	
7.5	190	4.8	122	15	137	243	10		6.9	175	15	115	265	15	
11.8	300	7.6	192	20	185	400	15		10.9	277	20	224	427	20	


Example Read Range:

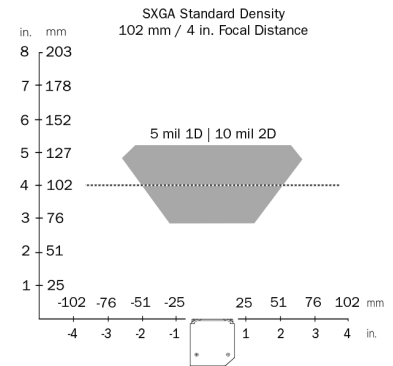

QXSGA Sensor Fixed Focus Read Ranges

Focus Distance		QXSGA HIGH-DENSITY							QXSGA STANDARD DENSITY						
		Field of View		Typical 2D Mil Size	Depth of Field (mm)		Min. 2D Mil Size		Field of View		Typical 2D Mil Size	Depth of Field (mm)		Min. 2D Mil Size	
		in.	mm	mil size	Inside	Outside	mil size		in.	mm	mil size	Inside	Outside	mil size	
2.0	50	1.4	35	5	46	55	3.3		2.0	51	5	43	59	3.3	
2.5	64	1.5	39	5	59	68	3.3		2.2	57	5	55	72	3.3	
3.2	81	2.0	50	5	74	87	3.3		2.8	72	5	69	92	5	
4.0	102	2.6	66	5	94	110	3.3		3.8	96	7.5	80	124	5	
5.2	133	3.2	81	7.5	112	153	5		4.6	117	7.5	107	159	7.5	
7.5	190	4.6	116	10	154	227	7.5		6.6	168	10	150	231	10	
11.8	300	7.2	184	15	227	373	10		10.4	265	15	203	397	15	

Example Read Range:

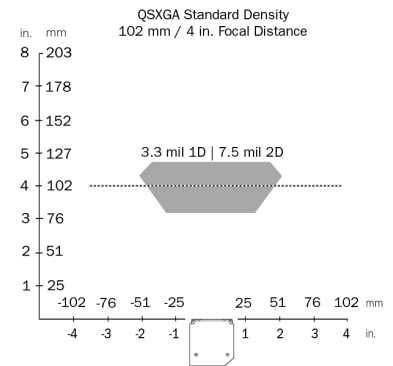

SXGA Sensor Ultra-High Density Fixed Focus Read Ranges

SXGA ULTRA-HIGH DENSITY - 64 MM					
Min. 1D Element		Depth of Field (mm)		Field of View	
mil size		Inside	Outside	Hor.	Vert.
3.3		63	67	16.5	12.5

SXGA ULTRA-HIGH DENSITY - 400 MM					
Min. 1D Element		Depth of Field (mm)		Field of View	
mil size		Inside	Outside	Hor.	Vert.
7.5		360	415	114	86
10		351	429		
15		325	451		
20		309	466		
30		293	512		
40		303	563		

SXGA ULTRA-HIGH DENSITY - 64 MM					
Min. 2D Element		Depth of Field (mm)		Field of View	
mil size		Inside	Outside	Hor.	Vert.
2		63.5	64.5	16.5	12.5
2.5		62.5	66		
3		62.5	66		
3.3		62.5	67		

SXGA ULTRA-HIGH DENSITY - 400 MM					
Min. 2D Element		Depth of Field (mm)		Field of View	
mil size		Inside	Outside	Hor.	Vert.
10		352	418	114	86
15		333	447		
20		315	456		
30		280	499		
40		258	536		

Note: Minimum 1D element is typically 1/2 the size of minimum 2D element. Example: 10 mil 2D = 5 mil 1D.



Zapraszamy do kontaktu!
Więcej informacji: www.kreski.pl

Omron Microscan and all product names and logos as noted are trademarks or registered trademarks of Omron Microscan Systems, Inc. All other trademarks are the property of their respective owners.

WVGA Sensor Autofocus Read Ranges

Object Distance Std Models		WVGA HIGH-DENSITY AUTOFOCUS			
		Horizontal Field of View		Vertical Field of View	
		in.	mm	in.	mm
2.0	50	1.3	33.5	0.8	21.5
2.5	64	1.7	42.0	1.0	26.5
3.2	81	2.1	52.5	1.3	33.0
4.0	102	2.6	65.0	1.6	41.0
5.2	133	3.3	84.5	2.1	53.5
7.5	190	4.7	119.5	3.0	75.0
11.8	300	7.4	187.0	4.6	117.0

Symbol Size	WVGA High-Density Read Range Testings			
(mils)	IE (mm)	PPE	OE (mm)	PPE
3.3	50	1.9	53	1.8
5	50	2.8	57	2.5
7.5	50	4.2	61	3.6
10	50	5.6	64	4.6
15	50	8.5	71	6.3

Object Distance Std Models		WVGA STANDARD DENSITY AUTOFOCUS			
		Horizontal Field of View		Vertical Field of View	
		in.	mm	in.	mm
2.0	50	2.1	52.5	1.3	34.0
2.5	64	2.6	65.5	1.6	41.5
3.2	81	3.2	82.0	2.0	51.0
4.0	102	4.0	102.0	2.5	64.0
5.2	133	5.2	132.0	3.2	82.0
7.5	190	7.3	185.0	4.5	115.5
11.8	300	11.3	288.0	7.1	180.0

Symbol Size	WVGA Standard Density Read Range Testings			
(mils)	IE (mm)	PPE	OE (mm)	PPE
5	50	1.8	60	1.5
7.5	50	2.7	69	2
10	50	3.6	77	2.5
15	50	5	92	3.1
20	50	7.2	99	4

Object Distance Std Models		SXGA HIGH-DENSITY AUTOFOCUS			
		Horizontal Field of View		Vertical Field of View	
		in.	mm	in.	mm
2.0	50	1.4	36.5	1.1	27.4
2.5	64	1.8	46.0	1.4	34.5
3.2	81	2.3	57.2	1.7	42.9
4.0	102	2.8	71.4	2.1	53.6
5.2	133	3.6	90.5	2.7	67.9
7.5	190	5.0	127.0	3.8	95.3
11.8	300	7.8	198.4	5.9	148.8

Symbol Size	SXGA High-Density Read Range Testings			
(mils)	IE (mm)	PPE	OE (mm)	PPE
3.3	50	3.0	NA	NA
5	50	4.6	144	1.7
7.5	50	6.8	208	1.8
10	50	9.2	291	1.7
15	50	13.9	374	2

Object Distance Std Models		SXGA STANDARD DENSITY AUTOFOCUS			
		Horizontal Field of View		Vertical Field of View	
		in.	mm	in.	mm
2.0	50	2.3	57.2	1.7	42.9
2.5	64	2.9	73.0	2.2	54.8
3.2	81	3.5	88.9	2.6	66.7
4.0	102	4.3	109.5	3.2	82.2
5.2	133	5.6	141.3	4.2	106.0
7.5	190	7.9	200.0	5.9	150.0
11.8	300	12.4	314.3	9.3	235.7

Symbol Size	SXGA Standard Density Read Range Testings			
(mils)	IE (mm)	PPE	OE (mm)	PPE
5	50	2.7	94	1.6
7.5	50	4.4	143	1.7
10	50	5.6	186	1.7
15	50	8.7	282	1.7
20	50	11.5	308	2.1

SXGA ULTRA-HIGH DENSITY AUTOFOCUS			
Min. 2D Element	Horizontal Field of View (mm)		Read Range (mm)
mil size	Inside	Outside	Autofocus
2	10	24	40 - 104
3.3	10	36	40 - 146
5	10	39	40 - 150

