

### NORDIC ID SA0506

The Nordic ID SA0506 is a special antenna that enables UHF RFID reading from both sides of the antenna due to its radiation pattern. The antenna is small in design and offers good reading performance.

The Nordic ID Nordic ID SA0506 is designed to suit special single tag reading applications and applications with special requirements.



### **UHF RFID**

Frequency band	ETSI 865-868 MHz, FCC 902-928 MHz
Gain	-5.5 dBic
Polarization	RHCP on front side and LHCP on back side of the antenna
Input impedance	50 Ω
VSWR	< 1.5:1
Maximum input power	2 W
Connector	SMA Female connector (with 47 cm / 18.5 inch coaxial cable)
SIZE AND WEIGHT	
Dimensions	(W) 53 x (L) 79 x (H) 7 mm / (W) 2.1 x (L) 3.1 x (H) 0.3 inch
Weight	24.5 g / 0.86 oz
ENVIRONMENT	
Operating Temperature	-20°C to 55°C -4°F to 130°F
Storage Temperature	-40°C to 85°C -40°F to 185°F

### PRODUCT HIGHLIGHTS

- Compact design that blends in well in different
  environments
- Due to its radiation pattern, this antenna allows reading from both sides

#### SUITABLE APPLICATION AREAS

• Single tag reading

Commissioning

Point-of-sales

Note: Minimum distance to metal surfaces 2cm / 0.8 inch.



All information is subject to change without prior notice.




Zapraszamy do kontaktu! Więcej informacji: www.kreski.pl




## NORDIC ID SA0506

### ANTENNA RADIATION PATTERN

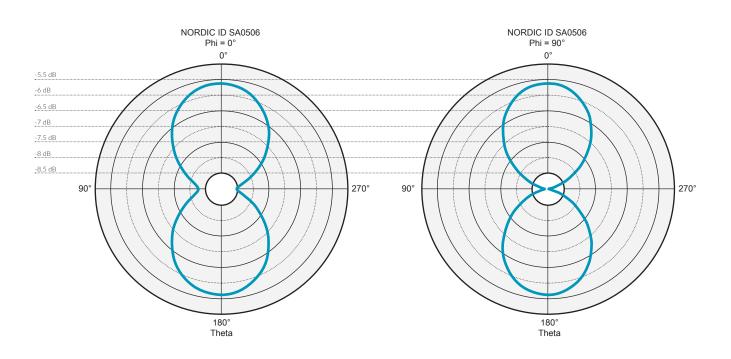

Theta 90





Zapraszamy do kontaktu! Więcej informacji: www.kreski.pl

# nordic<sup>1</sup>id

NORDIC ID GROUP Joensuunkatu 7 | FI-24100 Salo, FINLAND tel. +358 2 727 7700 | fax +358 2 727 7720 info@nordicid.com | www.nordicid.com

### GERMANY

Nordic ID GmbH | Bielefeld, GERMANY tel. +49 5206 70 84 70 | fax +49 5206 70 847 10 info@nordicid.de | www.nordicid.de V07