




ZX80 FULLY RUGGED TABLET

- Qualcomm® QCS6490, Octa-core Processor
- 8" LumiBond display with Getac sunlight readable technology (1,000 nits) and glove-enabled capacitive touchscreen
- Hot-swappable battery design for uninterrupted operation in the field
- 6ft drop, MIL-STD-810H and IP67 certified
- Multiple configurations with enterprise-level management tools in a thin, light form factor
- Verified as Android enterprise recommendedⁱ

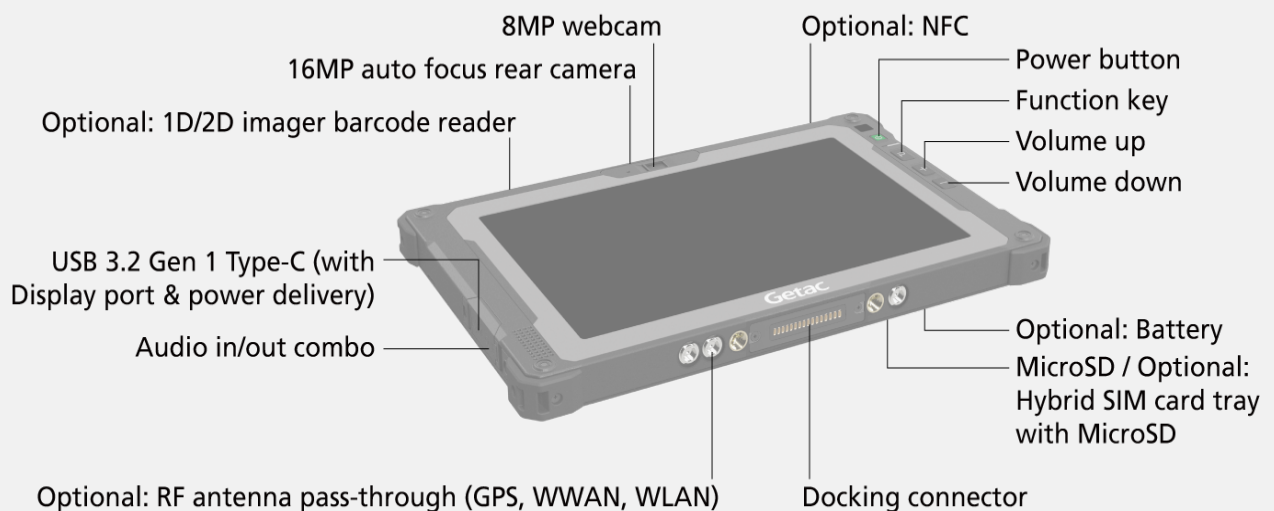

SPECIFICATIONS

Generation
G1

Operating System
Android™ 13.0

Mobile Computing Platform
Qualcomm® QCS6490, Octa-core 1.9GHz
Max. 2.7GHz

VGA Controller
Qualcomm® Adreno™ 643 GPU

NPU
Qualcomm® Hexagon™ Processor, up to 13
TOPS with 6th Qualcomm AI Engine

Display
8" Wide Viewing Angle TFT LCD WUXGA (1920
x 1200)
Protection film
1,000 nits LumiBond display with Getac sunlight
readable technology
Capacitive multi-touch screen

Storage & Memory
12GB LPDDR5, 256GB UFS

Keyboard
Power button
3 tablet programmable buttons

Pointing Device
Touchscreen
- Capacitive multi-touch screen
- Optional: Dual mode touchscreen (multi-touch
and digitizer)

Expansion Slot
Optional: 1D/2D imager barcode reader
Optional: NFC ⁱⁱ

I/O Interface
8M pixels webcam x 1
16M pixels auto focus rear camera x 1
Audio in/out combo x 1
USB 3.2 Gen 1 Type-C (with Display port &
power delivery) x 1
MicroSD x 1 or Optional: Hybrid SIM card
(Nano-SIM, 2FF) tray with MicroSD x 1 ⁱⁱⁱ
Docking connector x 1
Optional: RF antenna pass-through for GPS,
WWAN and WLAN

Communication Interface
Wi-Fi 6E 802.11ax
Bluetooth (v5.2) ^{iv}
Optional: Dual SIM (Nano-SIM 2FF and e-SIM) ⁱⁱⁱ
Optional: 4G LTE mobile broadband ⁱⁱⁱ
Optional: 5G Sub-6 ⁱⁱⁱ
Optional: Dedicate GPS ^v

Security Features
Optional: NFC ⁱⁱ

Power
Internal battery (3.86V, typical 4060mAh; min.
3950mAh)
LifeSupport battery swappable technology
Swappable Battery Options:
Battery bay cover (Default)
Battery (3.84V, typical 4990mAh; min.
4870mAh)
High capacity Li-ion battery (3.84V, typical
9980mAh; min. 9470mAh)

Dimension (W x D x H) & Weight
234 x 149.8 x 17.6mm (9.21" x 5.89" x 0.69")
590g (1.3lbs) ^{vi}

Rugged Features
MIL-STD-810H certified
IP67 certified
Vibration & 6ft (1.8m) drop resistant ^{vii}
Optional: ANSI/UL 121201, CSA C22.2 NO. 213
(Class I, Division 2, Groups A, B, C, D) ^{viii}

Environmental Specification
Temperature ^{ix}:
- Operating: -29°C to 63°C / -20°F to 145°F
- Storage: -51°C to 71°C / -60°F to 160°F
Humidity:
- 95% RH, non-condensing

Pre-installed Software
Getac Camera
Getac Input Method
Getac Driving Safety Utility (trial version)
agent/SDK
Getac deployXpress (trial version) agent/SDK
Getac enrollXpress
Getac Log Tool
Getac Diagnostic Tool
GDMS (trial version) agent/SDK
Getac settings and Google applications (Search,
Chrome, Gmail, Maps, YouTube, Play, Drive,
YouTube music, Google TV, Duo and photos)

Optional Software
Getac Driving Safety Utility
Getac deployXpress
Getac OEMConfig

Accessories
Optional:
Carry bag
Battery (3.84V, typical 4990mAh; min.
4870mAh)
High capacity Li-ion battery (3.84V, typical
9980mAh; min. 9470mAh)
DC-DC vehicle adapter (65W, 11-32VDC)
Multi-Bay charger (Dual-Bay)
Multi-Bay charger (Eight-Bay)
Digitizer pen
Capacitive stylus with tether
Protection film
Hand strap with stylus holder
Rotating hand strap with kickstand
Shoulder strap (2-point)
Vehicle cradle ^x
Vehicle dock ^x
Office dock
65W USB-C AC Adapter

Bumper-to-Bumper Warranty
Accidents can take your equipment out of
service when you least expect it, especially in a
rugged environment, which can cause costly
equipment downtime.
That is why Getac has introduced accidental
damage as standard under our Bumper-to-
Bumper warranty, to help minimize your
enterprise IT costs.
Bumper-to-Bumper is your hassle-free
guarantee.
That means you can depend on us to have your
unit back in service within days.

Standard
3 years Bumper-to-Bumper

**ZX80 FULLY
RUGGED TABLET**

- I. Certified by June 2024. Android enterprise recommended rugged devices deliver a consistent set of features verified by Google with an elevated device baseline, increased security standards and enterprise-focused features and behaviors to meet the needs of users. Google and Android are trademarks of Google LLC.
- II. 13.56MHz contactless NFC (ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant).
- III. One physical SIM card slot and one eSIM. Network service may vary depending on local telecommunication providers.
- IV. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- V. Support GPS, GLONASS, Galileo and BeiDou. Only available in the US, UK, EU, Australia and New Zealand.
- VI. Weight and dimensions vary from configurations and optional accessories.
- VII. Drop test results vary from configurations and optional accessories.
- VIII. Available with limited configurations and environment conditions.
- IX. Tested by an independent third-party test lab following MIL-STD-810H.
- X. Gamber-Johnson vehicle dock and cradle are e-mark certified.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.



Zapraszamy do kontaktu!
Więcej informacji: www.kreski.pl

Getac

Getac (UK) Ltd.

Getac House, Stafford Park 12, Telford,
Shropshire TF3 3BJ, United Kingdom Tel :
+44 (0) 1952 207 222 Sales-Getac-
UK@getac.com | www.getac.com/en/
Copyright © 2024 Getac Technology Corporation
and/or any of its affiliates. All Rights Reserved.
Information provided herewith is for reference
only, available specification shall be subjected to
quotation by request.

	Vehicle Dock	Office Dock
Serial Port	1	-
Audio In/Out Combo	-	1
DC in Jack	1	-
USB	USB 2.0 x 2	USB 2.0 x 2, USB Type-C (PD only) x 1
LAN	1	1
HDMI	-	1
RF Antenna Connector	3 (WWAN, WLAN, GPS)	-
Kensington Lock	-	1